




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

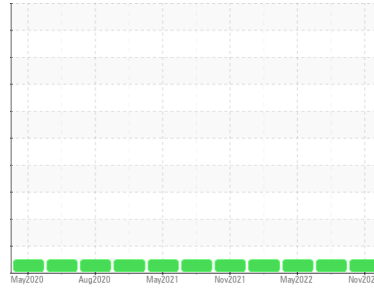

Area
97
 Machine Id
[97] A97 B114
 Component
Center Compressor
 Fluid
COMP LIFE 100 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		HPL0001753	HPL0000378	HPL0000438
Sample Date	Client Info		03 Nov 2022	02 Aug 2022	16 May 2022
Machine Age	hrs	Client Info	17701	15509	13972
Oil Age	hrs	Client Info	2396	204	6152
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >50	3	5	3
Chromium	ppm	ASTM D5185m >5	<1	<1	<1
Nickel	ppm	ASTM D5185m	<1	<1	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	3
Aluminum	ppm	ASTM D5185m >15	<1	1	1
Lead	ppm	ASTM D5185m >65	0	0	<1
Copper	ppm	ASTM D5185m >65	4	<1	2
Tin	ppm	ASTM D5185m >10	0	<1	<1
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0	<1
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	<1	<1	<1
Manganese	ppm	ASTM D5185m	<1	<1	1
Magnesium	ppm	ASTM D5185m	0	0	1
Calcium	ppm	ASTM D5185m	0	4	31
Phosphorus	ppm	ASTM D5185m	204	204	177
Zinc	ppm	ASTM D5185m	0	2	8
Sulfur	ppm	ASTM D5185m	21076	19273	17036

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >35	<1	<1	1
Sodium	ppm	ASTM D5185m	0	0	1
Potassium	ppm	ASTM D5185m >20	0	0	<1



FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.75	0.60	0.56

VISUAL

	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	VLITE	NONE	LIGHT
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG









OIL ANALYSIS REPORT

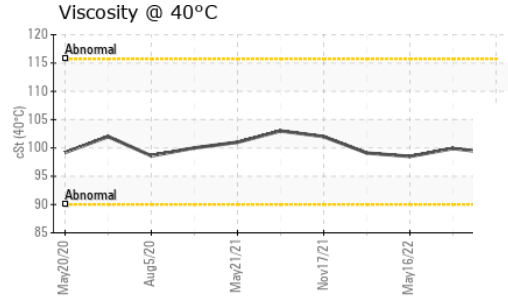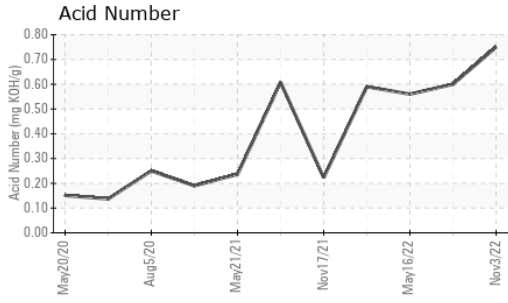

FLUID PROPERTIES		method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445		99.0	99.9	98.5

SAMPLE IMAGES		method	limit/base	current	history 1	history 2
Color					no image	no image
Bottom					no image	no image

GRAPHS

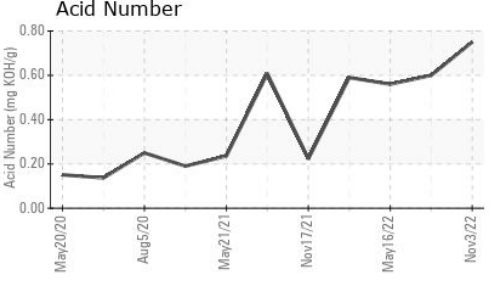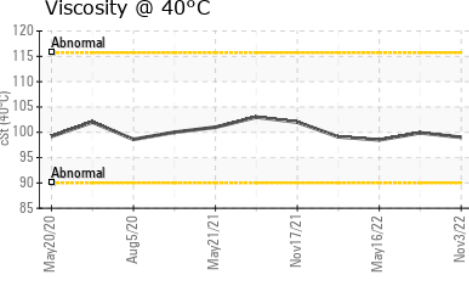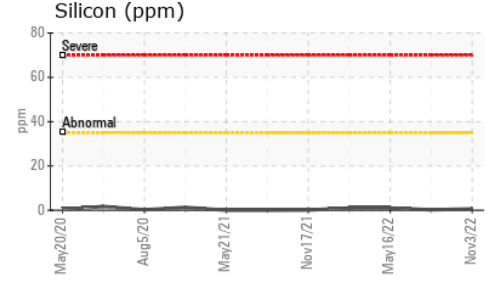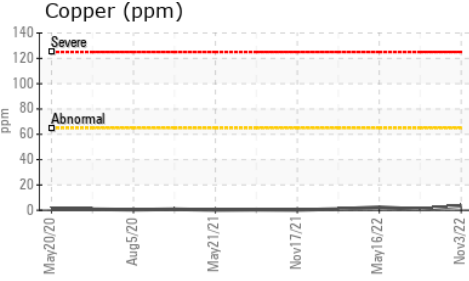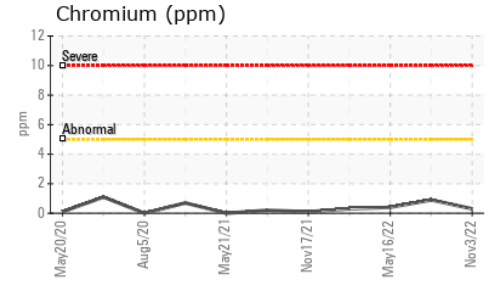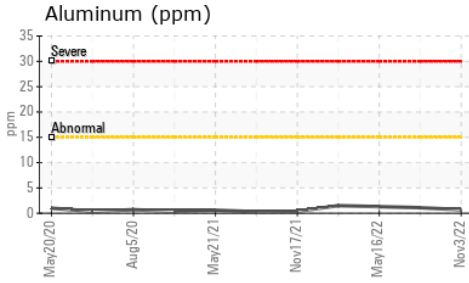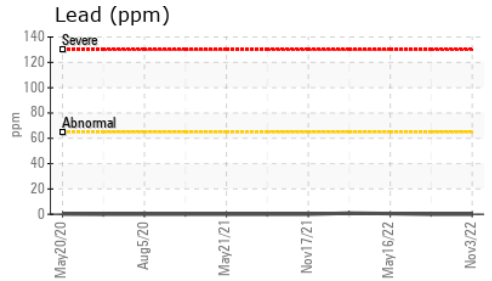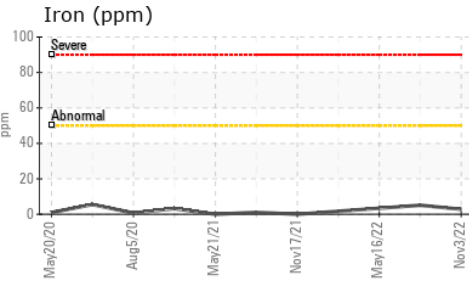

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL0001753 **Received** : 08 Nov 2022
Lab Number : **05688508** **Diagnosed** : 09 Nov 2022
Unique Number : 10208080 **Diagnostician** : Wes Davis
Test Package : MOB 2

KENSING
 2525 S KENSINGTON RD
 KANKAKEE, IL
 US 60901
 Contact: TIM HUBERT
 timothy.hubert@kensingolutions.com
 T: (815)939-8918
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)