




OIL ANALYSIS REPORT

Sample Rating Trend

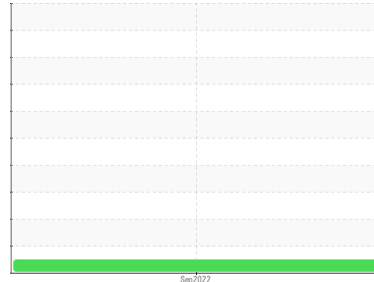

NORMAL



Machine Id
NX4099-L03

Component
Gasoline Engine

Fluid
SUPERTECH 5W20 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please note that this is a corrected copy for laboratory data updates.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. The water content is negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number	Client Info			WC0751509	---	---
Sample Date	Client Info			23 Sep 2022	---	---
Machine Age	kms	Client Info		33273	---	---
Oil Age	kms	Client Info		18024	---	---
Oil Changed	Client Info			Not Changed	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history 1	history 2
Glycol	WC Method			NEG	---	---

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>150	13	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		6	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>40	5	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>155	8	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		0	---	---






ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		47	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		92	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		427	---	---
Calcium	ppm	ASTM D5185m		1243	---	---
Phosphorus	ppm	ASTM D5185m		653	---	---
Zinc	ppm	ASTM D5185m		863	---	---
Sulfur	ppm	ASTM D5185m		2985	---	---

CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>30	30	---	---
Sodium	ppm	ASTM D5185m	>400	2	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Fuel	%	ASTM D3524	>4.0	1.3	---	---
Water	%	ASTM D6304	>0.2	0.056	---	---
ppm Water	ppm	ASTM D6304	>2000	568.1	---	---

INFRA-RED		method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.9	---	---
Sulfation	Abs./1mm	*ASTM D7415	>30	22.8	---	---



OIL ANALYSIS REPORT




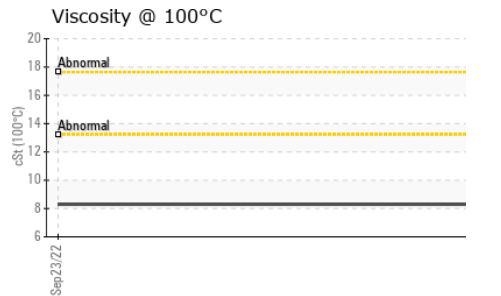
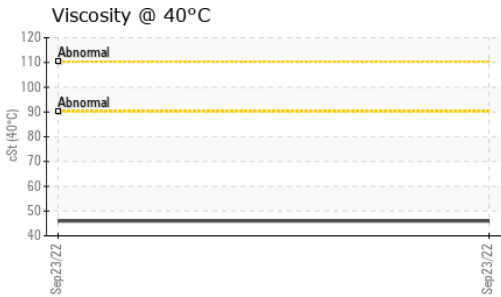
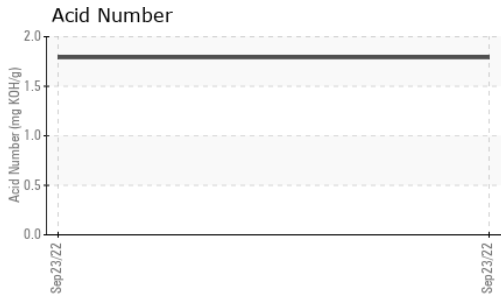
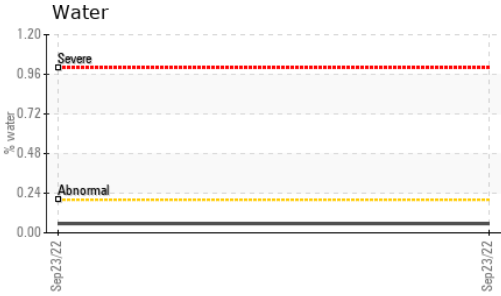
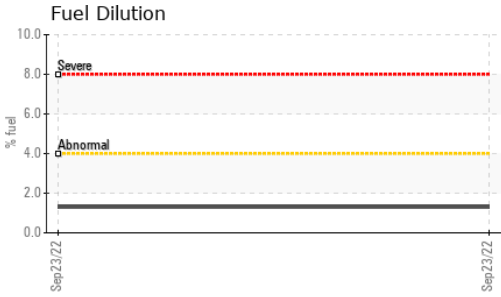


FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Oxidation	Abs./1mm	*ASTM D7414	>25	18.4	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.79	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.71	---	---

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445		46.0	---	---
Visc @ 100°C	cSt	ASTM D445		8.3	---	---
Viscosity Index (VI)	Scale	ASTM D2270		157	---	---

GRAPHS

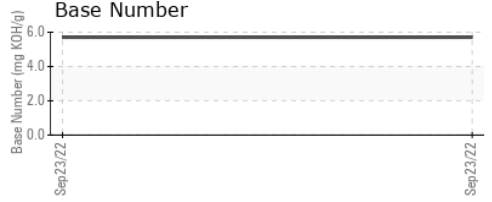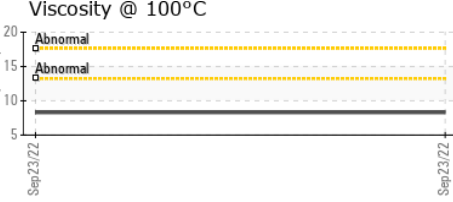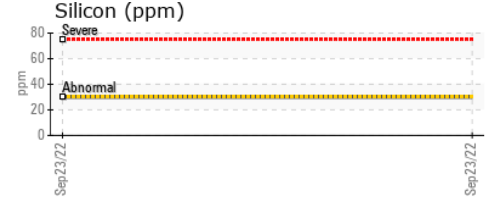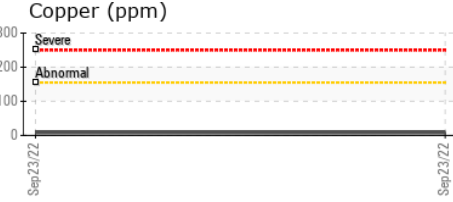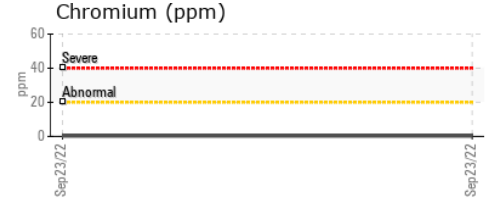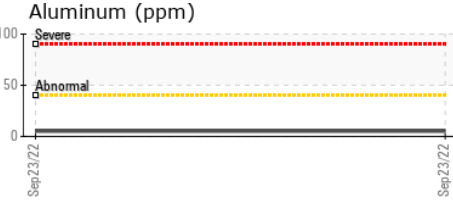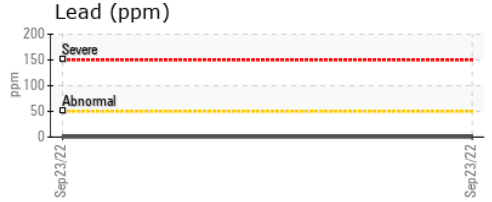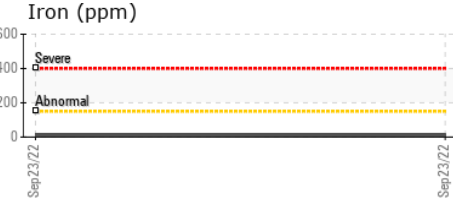

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0751509 **Received** : 09 Nov 2022
Lab Number : **05689740** **Diagnosed** : 15 Nov 2022
Unique Number : 10214313 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: fueldilution, KF, KV40, PercentFuel, TBN, VI)

AVL POWERTRAIN ENGINEERING INC
 47519 HALYARD DRIVE
 PLYMOUTH, MI
 US 48170-2438
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)