




# ADS 4

Component Gearbox Fluid SUMMIT SH 7150 (3 GAL)

#### COMPONENT CONDITION SUMMARY

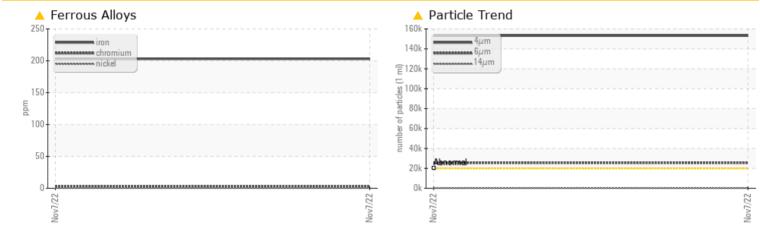

#### RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

#### PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL					
Iron	ppm	ASTM D5185m	>200	<u> </u>					
Particles >4µm		ASTM D7647	>20000	🔺 153182					
Particles >6µm		ASTM D7647	>5000	<u> </u>					
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>A</b> 24/22/15					

Customer Id: FLAMONNC Sample No.: WC0668059 Lab Number: 05690173 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description	
Change Filter			?	We recommend you service the filters on this component if applicable.	

HISTORICAL DIAGNOSIS



### **OIL ANALYSIS REPORT**

Sample Rating Trend



## ADS 4

#### Component Gearbox Fluid SUMMIT SH 7150 (3 GAL)

#### DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

#### 🔺 Wear

The iron level is abnormal. All other component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0668059		
Sample Date		Client Info		07 Nov 2022		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>A</b> 203		
Chromium	ppm	ASTM D5185m	>15	2		
Nickel	ppm	ASTM D5185m	>15	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>25	<1		
Lead	ppm	ASTM D5185m	>100	0		
Copper	ppm	ASTM D5185m	>200	۰ <1		
Tin		ASTM D5185m	>25	<1		
	ppm		>20	< 1		
Vanadium	ppm	ASTM D5185m		-		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		2		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		21		
Phosphorus	ppm	ASTM D5185m		691		
Zinc	ppm	ASTM D5185m		4		
Sulfur	ppm	ASTM D5185m		1146		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	5		
Sodium	ppm	ASTM D5185m		9		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<b>153182</b>		
Particles >6µm		ASTM D7647	>5000	<b>A</b> 25596		
Particles >14µm		ASTM D7647	>640	278		
Particles >21µm		ASTM D7647		42		
Particles >38µm		ASTM D7647	>40	1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	A 24/22/15		
FLUID DEGRADA		method	limit/base		history	history2
			minubase	current	history1	TISIOI Y2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.29		
·28·26) Boy: 1		C	ontact/Loca	tion CUDISTO	DUED INCKSO	

Report Id: FLAMONNC [WUSCAR] 05690173 (Generated: 11/22/2023 09:28:26) Rev: 1

Contact/Location: CHRISTOPHER JACKSON - FLAMONNC



20 0

250

### **OIL ANALYSIS REPORT**

scalar

scalar

scalar

method

\*Visual

\*Visual

\*Visua

scalar \*Visual

limit/base

NONE

NONE

NONE

NONE

current

NONE

NONE


NONE


NONE


history1

history2


VISUAL




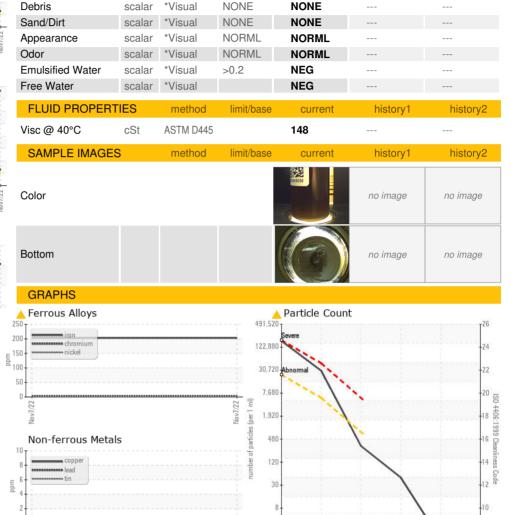



Ferrous Alloys



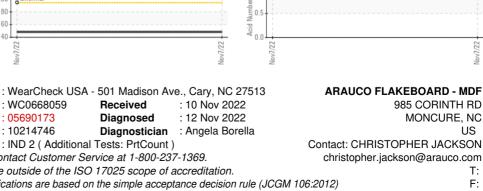

Acid Number

(mg KOH/g)

Sample No. : WC0668059 Ě Lab Number :05690173 Unique Number : 10214746 Test Package : IND 2 (Additional Tests: PrtCount) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. 

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Viscosity @ 40°C

260

240

(j. 220 0€ 200

. रहें <sub>180</sub>

160

140

Laboratory

CULING

Ab

214

38

US

T:

F: