




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

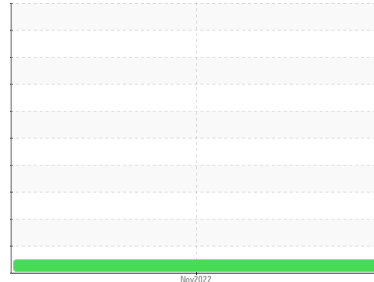

Machine Id  
**HYDREX AW 46 - 222924-1**

Component  
**New (Unused) Oil**  
Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

This is a baseline read-out on the submitted sample.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0613690</b>	---	---
Sample Date	Client Info			<b>03 Nov 2022</b>	---	---
Machine Age	mls	Client Info		<b>0</b>	---	---
Oil Age	mls	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		<b>0</b>	---	---
Chromium	ppm	ASTM D5185m		<b>0</b>	---	---
Nickel	ppm	ASTM D5185m		<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>2</b>	---	---
Aluminum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m		<b>0</b>	---	---
Copper	ppm	ASTM D5185m		<b>0</b>	---	---
Tin	ppm	ASTM D5185m		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185m		<b>53</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>341</b>	---	---
Zinc	ppm	ASTM D5185m		<b>464</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>1035</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual		<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---











# OIL ANALYSIS REPORT

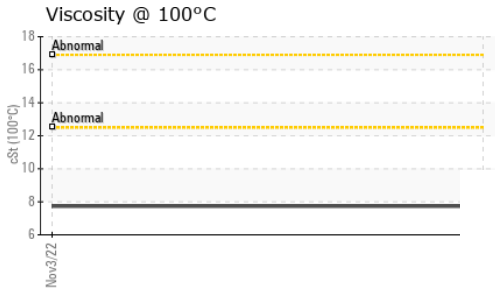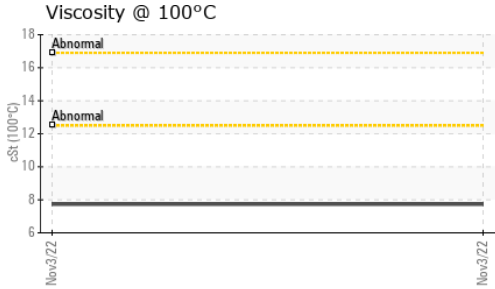

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		<b>46.92</b>	---	---
Visc @ 100°C	cSt	ASTM D445		<b>7.73</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270		<b>132</b>	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

## GRAPHS

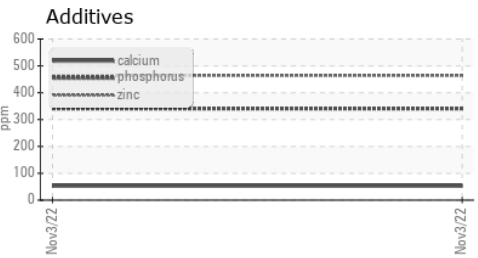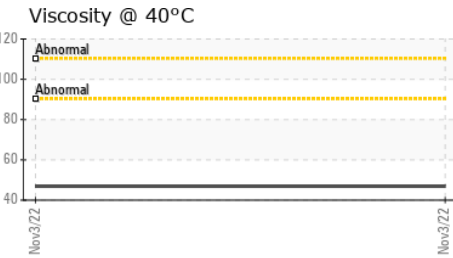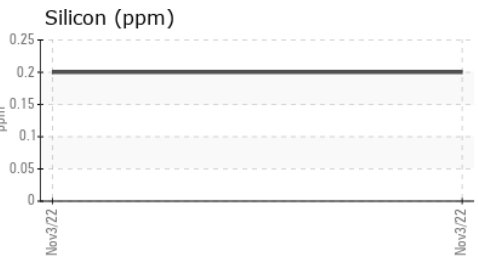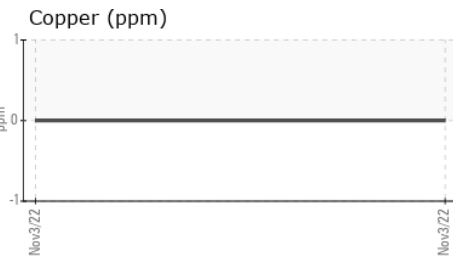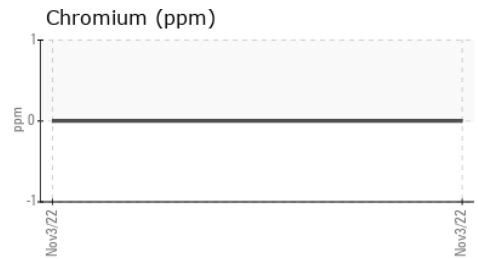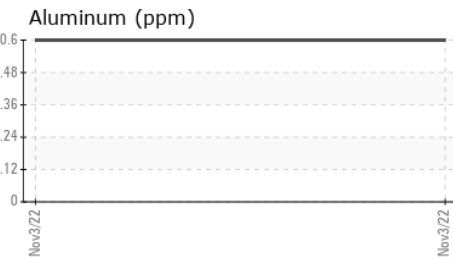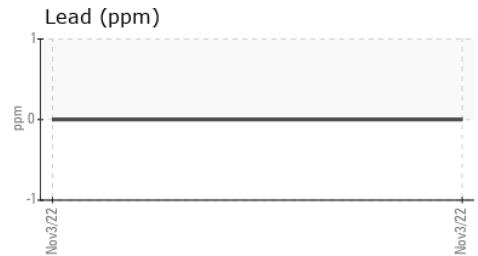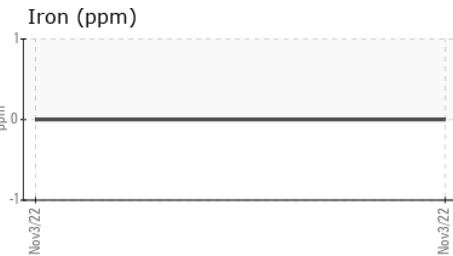

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0613690 **Received** : 15 Nov 2022  
**Lab Number** : 05694479 **Diagnosed** : 17 Nov 2022  
**Unique Number** : 10219052 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 1 ( Additional Tests: FT-IR, ICP-NewOil, KV100, VI )

**CAMPBELL OIL COMPANY**  
 PO BOX 637, 418 PEANUT ROAD  
 ELIZABETHTOWN, NC  
 US 28337  
 Contact: CHRIS CAMPBELL  
 chrisc@campbelloil.net  
 T: (910)862-0778  
 F: (910)862-6173

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)