




PROBLEM SUMMARY

Sample Rating Trend

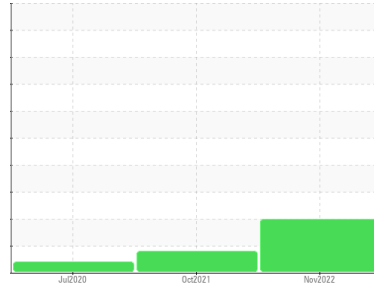

ISO




Machine Id
WS85 - WALL BOARD SUPPLY

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

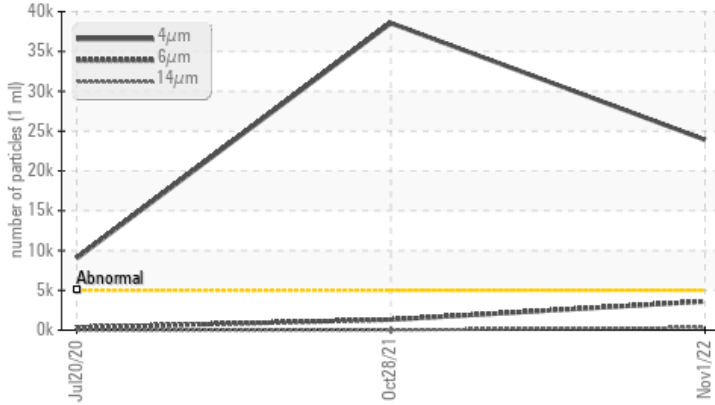

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ASTM D7647	ABNORMAL	ABNORMAL	ATTENTION
Particles >4µm	>5000	▲ 23901	▲ 38558	▲ 9017	
Particles >6µm	>1300	▲ 3615	▲ 1320	337	
Particles >14µm	>160	▲ 322	25	5	
Particles >21µm	>40	▲ 79	9	0	
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 22/19/16	▲ 22/18/12	▲ 20/16/10	

Customer Id: PALJACNJ
Sample No.: WC0723978
Lab Number: 05696945
Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
Angela Borella +1 800-237-1369
angela.borella@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

28 Oct 2021 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



20 Jul 2020 Diag: Don Baldrige

ISO



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

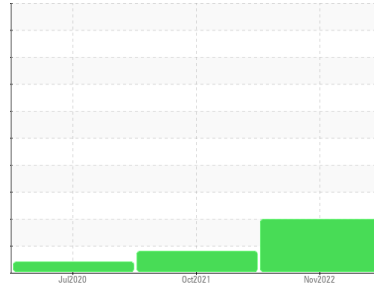

ISO



Machine Id
WS85 - WALL BOARD SUPPLY

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0723978	WC0573337	WC0443375
Sample Date	Client Info	01 Nov 2022	28 Oct 2021	20 Jul 2020
Machine Age	hrs	2778	2208	1516
Oil Age	hrs	2778	0	0
Oil Changed	Client Info	Not Chngd	Not Chngd	N/A
Sample Status		ABNORMAL	ABNORMAL	ATTENTION

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	9	6	6
Chromium	ppm	ASTM D5185m >10	0	<1	<1
Nickel	ppm	ASTM D5185m >10	0	0	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	2	<1	0
Aluminum	ppm	ASTM D5185m >10	<1	0	0
Lead	ppm	ASTM D5185m >10	<1	0	<1
Copper	ppm	ASTM D5185m >75	1	1	1
Tin	ppm	ASTM D5185m >10	0	0	0
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 5	3	0	2
Barium	ppm	ASTM D5185m 5	0	0	<1
Molybdenum	ppm	ASTM D5185m 5	3	2	1
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m 25	16	17	12
Calcium	ppm	ASTM D5185m 200	102	95	82
Phosphorus	ppm	ASTM D5185m 300	316	326	297
Zinc	ppm	ASTM D5185m 370	406	382	389
Sulfur	ppm	ASTM D5185m 2500	3882	2582	2704

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >20	<1	0	<1
Sodium	ppm	ASTM D5185m	3	2	1
Potassium	ppm	ASTM D5185m >20	2	0	<1

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 23901	▲ 38558	▲ 9017
Particles >6µm	ASTM D7647 >1300	▲ 3615	▲ 1320	337
Particles >14µm	ASTM D7647 >160	▲ 322	25	5
Particles >21µm	ASTM D7647 >40	▲ 79	9	0
Particles >38µm	ASTM D7647 >10	5	0	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 22/19/16	▲ 22/18/12	▲ 20/16/10

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	0.32	0.291	0.353




OIL ANALYSIS REPORT

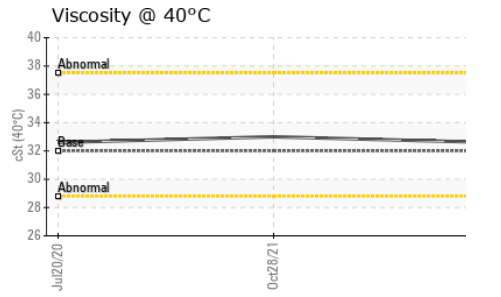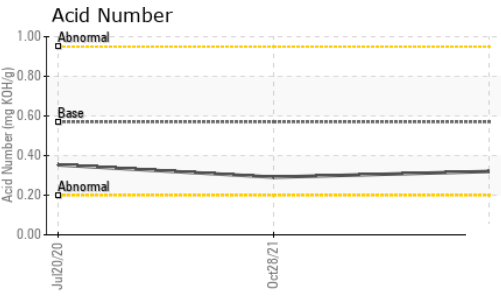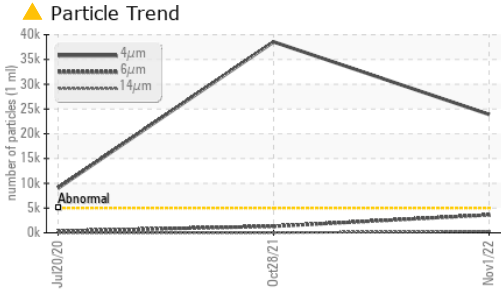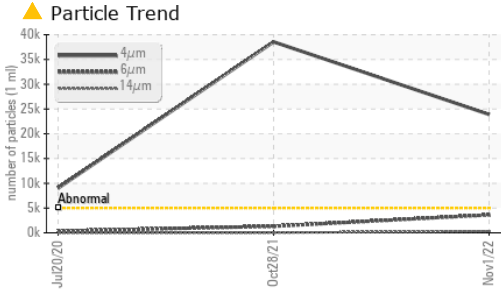






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 32	32.6	33.0	32.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

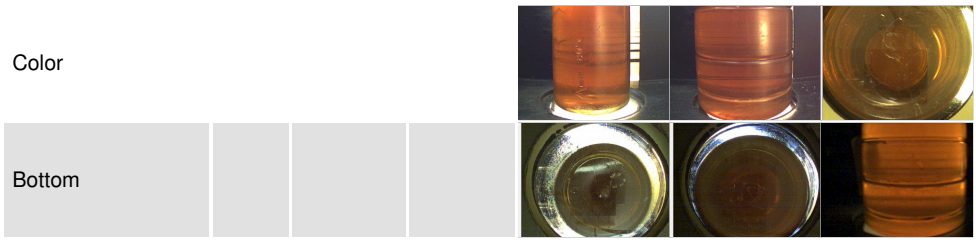

GRAPHS

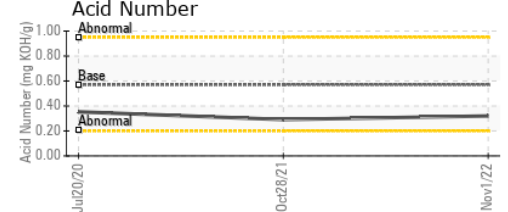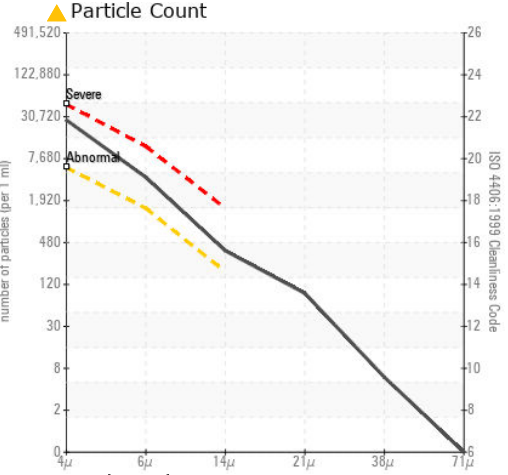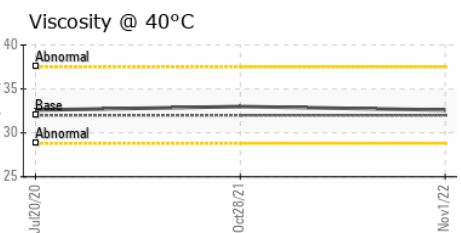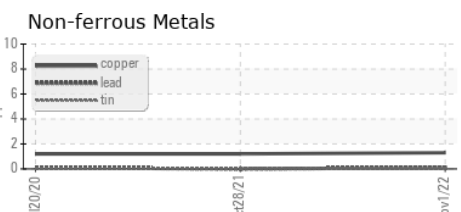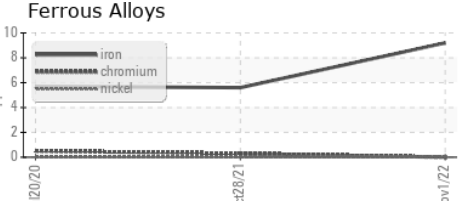

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0723978 **Received** : 17 Nov 2022
Lab Number : **05696945** **Diagnosed** : 18 Nov 2022
Unique Number : 10221518 **Diagnostician** : Angela Borella
Test Package : CONST

PALFINGER - BRANCH 410
 632 CEDAR SWAMP RD
 JACKSON, NJ
 US 08527
 Contact: ANTHONY HARTIGAN
 a.hartigan@palfinger.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)