

PROBLEM SUMMARY

KAESER 5954658


Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

Sample Rating Trend ISO

COMPONENT CONDITION SUMMARY

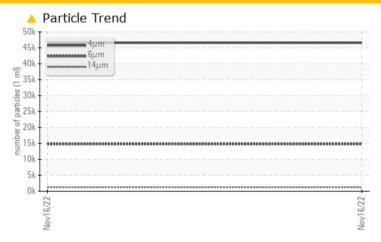

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | | | | |
|--------------------------|--------------|---------|------------------|--|--|--|--|--|--|
| Sample Status | | | ABNORMAL | | | | | | |
| Particles >6µm | ASTM D7647 | >1300 | 14816 | | | | | | |
| Particles >14µm | ASTM D7647 | >80 | 1287 | | | | | | |
| Particles >21µm | ASTM D7647 | >20 | 258 | | | | | | |
| Particles >38µm | ASTM D7647 | >4 | <u> </u> | | | | | | |
| Oil Cleanliness | ISO 4406 (c) | >/17/13 | <u> 23/21/17</u> | | | | | | |

Customer Id: UPSLAT Sample No.: KCP47971 Lab Number: 05701407 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

| RECOMMENDED ACTIONS | | | | | | | |
|---------------------|--------|------|---------|---|--|--|--|
| Action | Status | Date | Done By | Description | | | |
| Change Fluid | | | ? | Oil and filter change at the time of sampling has been noted. | | | |
| Change Filter | | | ? | Oil and filter change at the time of sampling has been noted. | | | |

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

ISO



KAESER 5954658

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | Nov2022 | | |
|------------------|----------|--------------|------------|-----------------|----------|----------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | KCP47971 | | |
| Sample Date | | Client Info | | 16 Nov 2022 | | |
| Machine Age | hrs | Client Info | | 17615 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | Changed | | |
| Sample Status | | | | ABNORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | >3 | 0 | | |
| Titanium | ppm | ASTM D5185m | >3 | 0 | | |
| Silver | ppm | ASTM D5185m | >2 | 0 | | |
| Aluminum | ppm | ASTM D5185m | >10 | <1 | | |
| Lead | ppm | ASTM D5185m | >10 | 0 | | |
| Copper | ppm | ASTM D5185m | >50 | 9 | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 0 | 0 | | |
| Barium | ppm | ASTM D5185m | 90 | 4 | | |
| Molybdenum | ppm | ASTM D5185m | 0 | - <1 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | 100 | 35 | | |
| Calcium | ppm | ASTM D5185m | 0 | <1 | | |
| Phosphorus | ppm | ASTM D5185m | 0 | 2 | | |
| Zinc | ppm | ASTM D5185m | 0 | 17 | | |
| Sulfur | ppm | ASTM D5185m | 23500 | 22632 | | |
| | | | | | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | 2 | | |
| Sodium | ppm | ASTM D5185m | | 12 | | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | | |
| Water | % | ASTM D6304 | >0.05 | 0.015 | | |
| ppm Water | ppm | ASTM D6304 | >500 | 155.3 | | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4μm | | ASTM D7647 | | 46602 | | |
| Particles >6µm | | ASTM D7647 | >1300 | <u> 14816</u> | | |
| Particles >14μm | | ASTM D7647 | >80 | <u> </u> | | |
| Particles >21μm | | ASTM D7647 | >20 | <u>^</u> 258 | | |
| Particles >38μm | | ASTM D7647 | >4 | <u> </u> | | |
| Particles >71μm | | ASTM D7647 | >3 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | <u>23/21/17</u> | | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 1.0 | 0.43 | | |



OIL ANALYSIS REPORT

