


KAESER COMPRESSORS Built for a lifetime:

KAESER 6434789

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

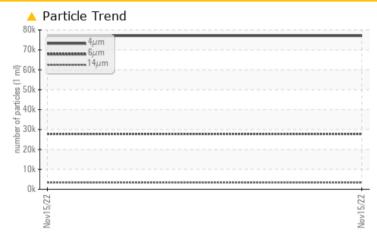

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	
Particles >6µm	ASTM D7647	>1300	<u> </u>	
Particles >14µm	ASTM D7647	>80	A 3342	
Particles >21µm	ASTM D7647	>20	A 768	
Particles >38µm	ASTM D7647	>4	<mark>/</mark> 36	
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u> </u>	


Customer Id: UPSLAT Sample No.: KCP47975 Lab Number: 05701408 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

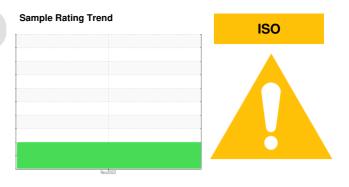

RECOMMENDED	ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO

KAESER 6434789

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Machine Id

A Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP47975		
Sample Date		Client Info		15 Nov 2022		
Machine Age	hrs	Client Info		29954		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
		ASTM D5185m	>50	21		
Copper Tin	ppm	ASTM D5185m	>50 >10	<1		
	ppm		>10			
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	2		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	4		
Calcium	ppm	ASTM D5185m	0	12		
Phosphorus	ppm	ASTM D5185m	0	7		
Zinc	ppm	ASTM D5185m		10		
Sulfur	ppm	ASTM D5185m	23500	20693		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m	220	2		
Potassium		ASTM D5185m	>20	0		
	ppm %			0.018		
Water		ASTM D6304				
ppm Water	ppm		>500	184.9		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		77046		
Particles >6µm		ASTM D7647		<u> </u>		
Particles >14µm		ASTM D7647	>80	A 3342		
		ASTM D7647	>20	<u> </u>		
Particles >21µm		ASTM D7647	>4	A 36		
Particles >21µm Particles >38µm						
		ASTM D7647	>3	3		
Particles >38µm Particles >71µm			>3 >/17/13	3 A 23/22/19		
Particles >38µm		ASTM D7647				





Built for a lifetime

OIL ANALYSIS REPORT

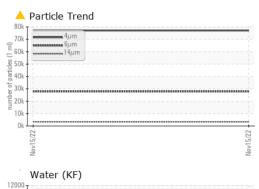



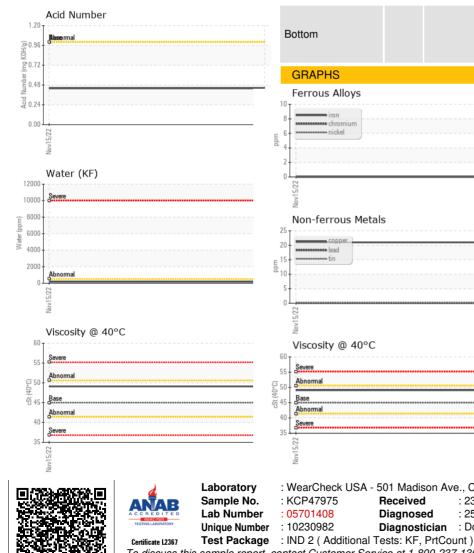

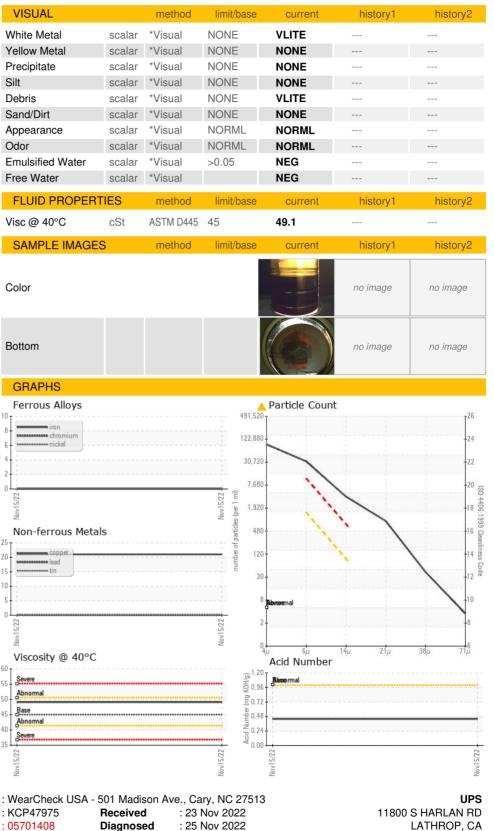

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnostician : Doug Bogart

US 95330

T:

F:

Contact: J. BILAL

jbilal@ups.com