


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id **A109 (S/N 6407-12)**

Wind Turbine Gearbox

Fluid

MOBIL MOBILGEAR SHC XMP 320 (74 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		May2011	Dec2014 Oct2016	Feb 2018 Nov 2019 N	ov2021	
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		MHI017167	MHI019133	MHI019285
Sample Date		Client Info		17 Nov 2022	19 Nov 2021	11 Nov 2020
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		86700	80831	81857
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>200	10	21	17
Iron	ppm	ASTM D5185m	>200	6	3	6
Chromium	ppm	ASTM D5185m	>3	0	0	0
Nickel	ppm	ASTM D5185m	>3	1	0	0
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>30	0	0	0
Lead	ppm	ASTM D5185m	>15	<1	0	0
Copper	ppm	ASTM D5185m	>75	10	4	2
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m	>5		0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	3
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m	0	0	0	<1
Phosphorus	ppm	ASTM D5185m	485	412	422	407
Zinc	ppm	ASTM D5185m	0	16	9	8
Sulfur	ppm	ASTM D5185m		4850	3339	3708
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+30	0	0	0
Sodium	ppm	ASTM D5185m	>15	<1	0	0
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water	%	ASTM D6304	>0.1	0.009	0.006	0.005
ppm Water	ppm	ASTM D6304	>1000	96.1	60.6	56.9
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1175	1626	432
Particles >6µm		ASTM D7647	>5000	307	377	180
Particles >14µm		ASTM D7647	>640	27	31	32
Particles >21µm		ASTM D7647	>160	8	8	13
Particles >38μm		ASTM D7647	>40	1	0	2
Particles >71μm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/19/16	17/15/12	18/16/12	16/15/12
		. /				



OIL ANALYSIS REPORT

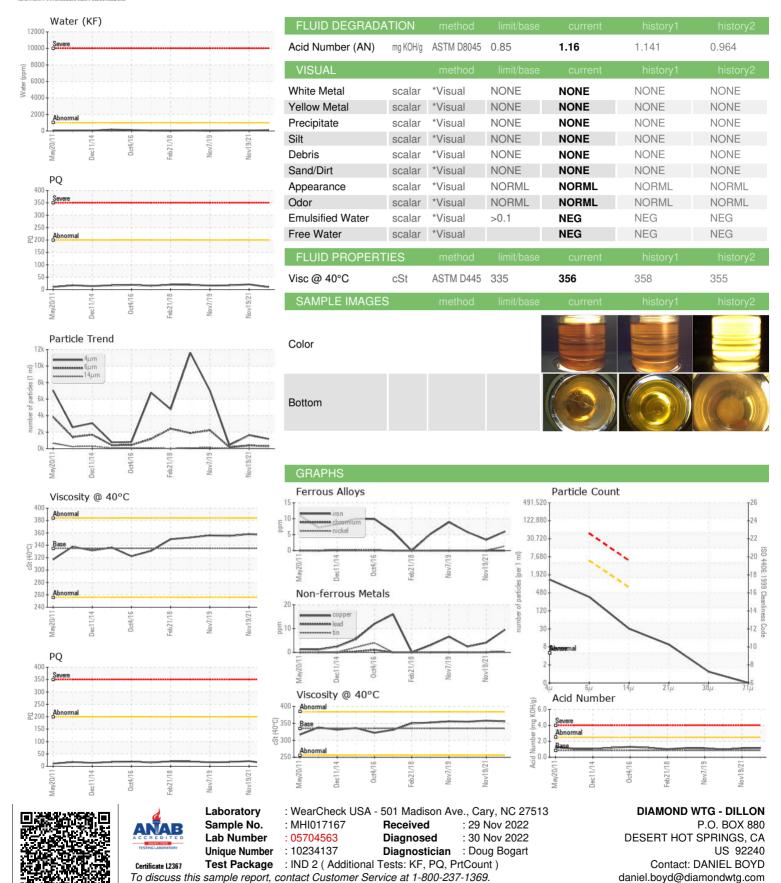

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (760)329-7171

F: (760)329-7122