

OIL ANALYSIS REPORT





Sample Rating Trend



DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: Total oil added 82 gal

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

RON CG 40 (145	GAL)	52022 Mar20	22 Apr2022 May2022	Jul2022 Aug2022 Sep2022	0et2022	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0698993	WC0699059	WC0699060
Sample Date		Client Info		28 Nov 2022	16 Nov 2022	08 Nov 2022
Machine Age	hrs	Client Info		119020	118734	118546
Oil Age	hrs	Client Info		759	473	285
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>45	9	7	3
Chromium	ppm	ASTM D5185m	>2	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Γitanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	3	2
_ead	ppm	ASTM D5185m	>5	2	2	<1
Copper	ppm	ASTM D5185m	>14	4	3	2
- in	ppm	ASTM D5185m	>13	7	5	3
/anadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	1	1	0
Barium	nnm	ACTM DE10Em	1	0	0	0
	ppm	ASTM D5185m	1		U	· ·
Molybdenum	ppm	ASTM D5185m	2	1	1	<1
-		ASTM D5185m				
Manganese	ppm	ASTM D5185m	2	1	1	<1
Manganese Magnesium	ppm	ASTM D5185m ASTM D5185m	2	1 <1	1 <1	<1 <1
Manganese Magnesium Calcium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	2 1 9	1 <1 17	1 <1 16	<1 <1 14
Manganese Magnesium Calcium Phosphorus	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 1 9 2712	1 <1 17 2973	1 <1 16 2855	<1 <1 14 2943
Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 1 9 2712 292	1 <1 17 2973 306	1 <1 16 2855 285	<1 <1 14 2943 278
Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 1 9 2712 292 342	1 <1 17 2973 306 356	1 <1 16 2855 285 334	<1 <1 14 2943 278 330
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 1 9 2712 292 342 2575	1 <1 17 2973 306 356 3692	1 <1 16 2855 285 334 3429	<1 <1 14 2943 278 330 3920
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	2 1 9 2712 292 342 2575 limit/base	1 <1 17 2973 306 356 3692 current	1 <1 16 2855 285 334 3429 history1	<1 <1 14 2943 278 330 3920 history2
Manganese Magnesium Calcium Phosphorus Zinc Gulfur CONTAMINANTS Silicon Godium	ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m	2 1 9 2712 292 342 2575 limit/base	1 <1 17 2973 306 356 3692 current 348	1 <1 16 2855 285 334 3429 history1 267	<1 <1 <1 14 2943 278 330 3920 history2
Manganese Magnesium Calcium Phosphorus Zinc Gulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	2 1 9 2712 292 342 2575 limit/base >200	1 <1 17 2973 306 356 3692 current 348 <1	1 <1 16 2855 285 334 3429 history1 267 0	<1 <1 <1 14 2943 278 330 3920 history2 188 0
Manganese Magnesium Calcium Phosphorus Zinc Gulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	2 1 9 2712 292 342 2575 limit/base >200	1 <1 17 2973 306 356 3692 current 348 <1 0	1 <1 16 2855 285 334 3429 history1 267 0 0	<1 <1 14 2943 278 330 3920 history2 188 0 0
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Euel INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m	2 1 9 2712 292 342 2575 limit/base >200 >4.0	1 <1 17 2973 306 356 3692 current 348 <1 0 0.3	1 <1 16 2855 285 334 3429 history1 267 0 0 0.2	<1 <1 14 2943 278 330 3920 history2 188 0 0 0 0.2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m Method ASTM D5185m ASTM D7844	2 1 9 2712 292 342 2575 limit/base >200 >4.0	1 <1 17 2973 306 356 3692 current 348 <1 0 0.3 current 0.1	1	<1 <1 14 2943 278 330 3920 history2 188 0 0 0 0.2 history2 0.1
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D3524	2 1 9 2712 292 342 2575 limit/base >200 >4.0 limit/base	1 <1 17 2973 306 356 3692 current 1 0 0.3 current	1 <1 6 2855 285 334 3429 history1 267 0 0 0.2 history1	<1 <1 14 2943 278 330 3920 history2 188 0 0 0.2 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m Method ASTM D5185m ASTM D7844 *ASTM D7844	2 1 9 2712 292 342 2575 limit/base >200 >4.0 limit/base	1 <1 17 2973 306 356 3692 current 348 <1 0 0.3 current 0.1 6.7	1 <1 6 2855 285 334 3429 history1 267 0 0 0.2 history1 0.1 6.1	<1 <1 14 2943 278 330 3920 history2 188 0 0 0 0.2 history2 0.1 5.6
Manganese Magnesium Calcium Phosphorus Zinc Gulfur CONTAMINANTS Gilicon Godium Potassium Fuel INFRA-RED Goot % Nitration Gulfation FLUID DEGRADA	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7844	2 1 9 2712 292 342 2575 limit/base >200 >4.0 limit/base >20 >30 limit/base	1 <1 17 2973 306 356 3692 current 348 <1 0 0.3 current 0.1 6.7 23.8 current	1	<1 <1 41 44 2943 278 330 3920 history2 188 0 0 0.2 history2 0.1 5.6 19.6 history2
Manganese Magnesium Calcium Phosphorus Zinc Gulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation FLUID DEGRADA Dxidation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D78124 *ASTM D7844 *ASTM D7624 *ASTM D76125 method *ASTM D7415 method *ASTM D7414	2 1 9 2712 292 342 2575 limit/base >200 >4.0 limit/base >20 >30 limit/base	1	1	<1 <1 <1 14 2943 278 330 3920 history2 188 0 0 0.2 history2 0.1 5.6 19.6 history2 10.8
Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7844	2 1 9 2712 292 342 2575 limit/base >200 >4.0 limit/base >20 >30 limit/base	1 <1 17 2973 306 356 3692 current 348 <1 0 0.3 current 0.1 6.7 23.8 current	1	<1 <1 41 44 2943 278 330 3920 history2 188 0 0 0.2 history2 0.1 5.6 19.6 history2



OIL ANALYSIS REPORT

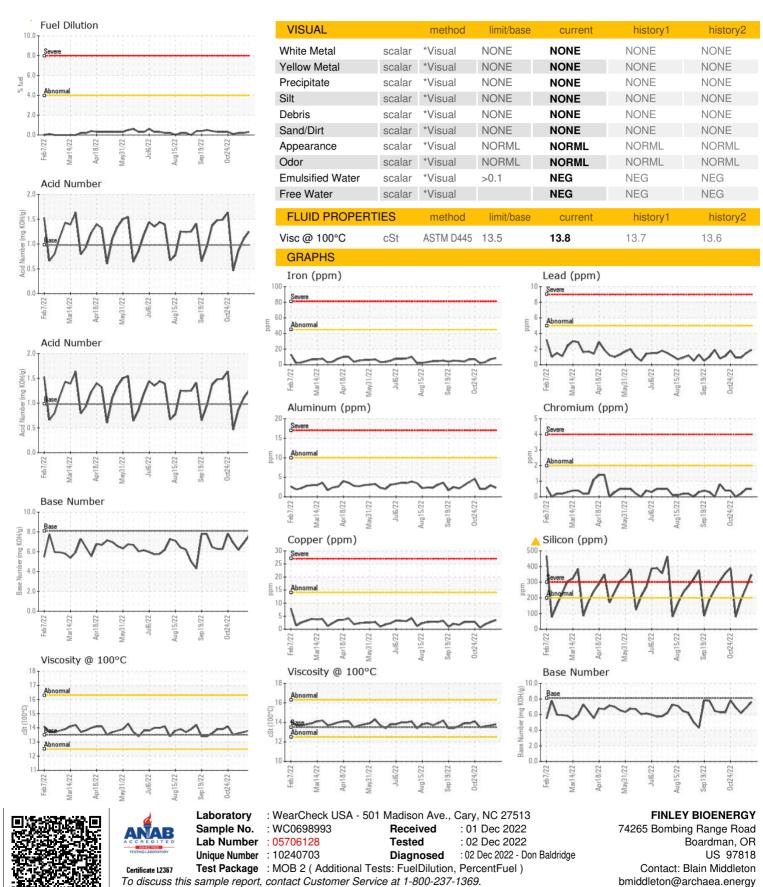

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

T: (541)481-3232