

OIL ANALYSIS REPORT

Area Molding PRESS 10 (S/N 61002719)

Hydraulic System SHELL TELLUS S3 M 46 (91 GAL)

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

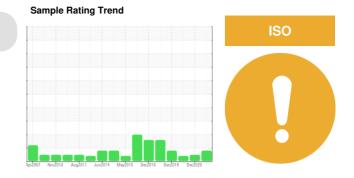

SAMPLE INFORM Sample Number Sample Date	IATION					
Sample Date		method	limit/base	current	history1	history2
Sample Date		Client Info		ST44361	ST40892	ST39792
-		Client Info		01 Dec 2022	07 Dec 2020	13 Feb 2020
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>40	10	14	13
Chromium	ppm	ASTM D5185m	>4	<1	1	1
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>4	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m		2	3	3
Tin	ppm	ASTM D5185m		0	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ppm	AOTIVI DUTOUIII		U	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	3	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	0	0	0
Calcium	ppm	ASTM D5185m	0	10	3	1
Phosphorus	ppm	ASTM D5185m	106	119	136	156
Zinc	ppm	ASTM D5185m	0	53	60	67
Sulfur	ppm	ASTM D5185m		1229	1162	1330
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	<1	<1
Sodium	ppm	ASTM D5185m		1	0	<1
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.05	0.003	0.003	0.001
14/- t - 1	ppm	ASTM D6304	>500	36.4	28.2	15.0
ppm Water		mathad	limit/base	current	history1	history2
FLUID CLEANLIN	IESS	method	initiase	ourrent	matory	Thistoryz
	IESS	ASTM D7647	>640	518	565	351
FLUID CLEANLIN Particles >4µm	IESS		>640			
FLUID CLEANLIN Particles >4μm Particles >6μm	IESS	ASTM D7647	>640	518	565	351
FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm	IESS	ASTM D7647 ASTM D7647	>640 >80 >10	518 87	565 42	351 114
FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm Particles >21μm	IESS	ASTM D7647 ASTM D7647 ASTM D7647	>640 >80 >10	518 87 9	565 42 4	351 114 9
FLUID CLEANLIN	IESS	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>640 >80 >10 >3 >3	518 87 9 3	565 42 4 2	351 114 9 2
FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm Particles >21μm Particles >38μm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>640 >80 >10 >3 >3	518 87 9 3 1	565 42 4 2 0	351 114 9 2 0
FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>640 >80 >10 >3 >3 >3	518 87 9 3 1 0	565 42 4 2 0 0	351 114 9 2 0 0

Acid Number (AN)


mg KOH/g ASTM D8045


Report Id: MENWAL [WUSCAR] 05707077 (Generated: 05/15/2024 07:20:27) Rev: 1


0.24 0.244 0.250 Contact/Location: Jonathan Vanbeekum - MENWAL





OIL ANALYSIS REPORT

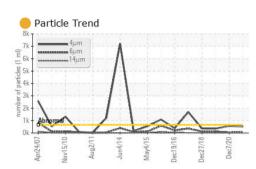


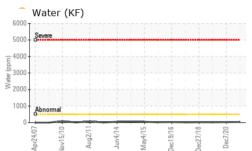








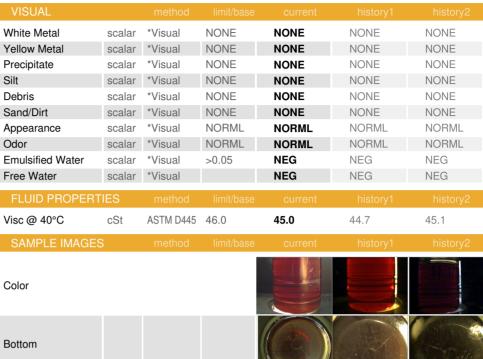

Bottom

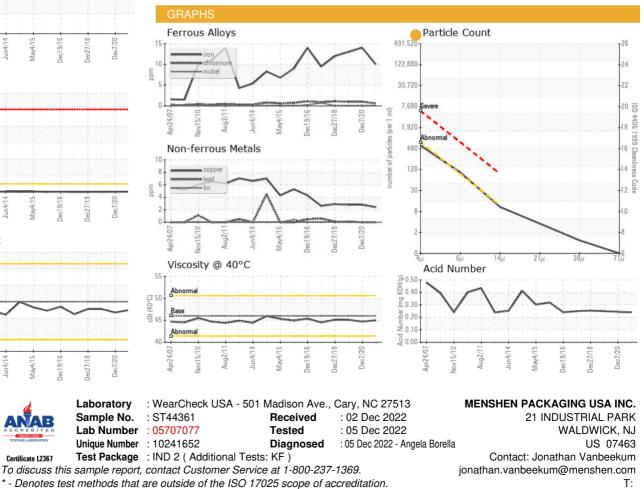

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: MENWAL [WUSCAR] 05707077 (Generated: 05/15/2024 07:20:27) Rev: 1

Certificate 12367

Contact/Location: Jonathan Vanbeekum - MENWAL

F: