

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Area Molding PRESS 36 (S/N 61024688)

Hydraulic System SHELL TELLUS S2 M 46 (--- GAL)

Recommendation

Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ST44413	ST40986	ST39382
Sample Date		Client Info		01 Dec 2022	11 Dec 2020	13 Feb 2020
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	ATTENTION	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2	2	1
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>20	<1	<1	<1
Tin	ppm	ASTM D5185m	>20	0	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		31	33	37
Phosphorus	ppm	ASTM D5185m		75	79	89
Zinc	ppm	ASTM D5185m		17	8	4
Sulfur	ppm	ASTM D5185m		3173	2510	2651
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	1	1
Sodium	ppm	ASTM D5185m		2	0	<1
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.05	0.003	0.003	0.001
ppm Water	ppm	ASTM D6304	>500	36.9	36.0	10.5
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	838	209	330
Particles >6µm		ASTM D7647	>80	<mark> </mark> 135	65	117
Particles >14µm		ASTM D7647	>10	9	1 1	17
Particles >21µm		ASTM D7647	>3	1	4	6
Particles >38µm		ASTM D7647	>3	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>16/13/10	— 17/14/10	15/13/11	6/14/11
FLUID DEGRADA		method	limit/base	current	history1	history2
	mg KOH/g	ASTM D8045		0.26	0.176	0.173

Acid Number (AN) Report Id: MENWAL [WUSCAR] 05707090 (Generated: 05/14/2024 14:17:00) Rev: 1

Contact/Location: Jonathan Vanbeekum - MENWAL



Ē

(B/HO) ₽°0.1 Ê 0.12 Dig 0.0

0.00

600 500

, ater 2000 Vater 3000

> 100 Ab

> > 54

52

44


42 Abnorma

л


lec19/16

Dec]

OIL ANALYSIS REPORT

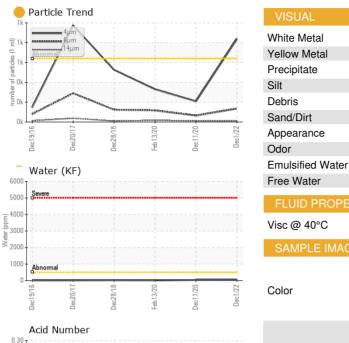



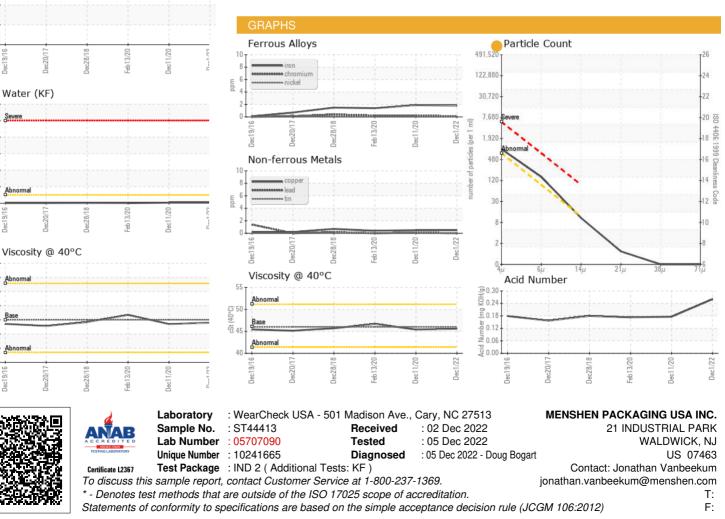

Report Id: MENWAL [WUSCAR] 05707090 (Generated: 05/14/2024 14:17:00) Rev: 1

Contact/Location: Jonathan Vanbeekum - MENWAL