

No relevant graphs to display

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC T	EST RE	SULTS			
Sample Status				ABNORMAL	
Debris	scalar	*Visual	NONE	A MODER	

Customer Id: OWEDAL Sample No.: WC0550857 Lab Number: 05707281 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

VIS DEBRIS

Area [51131275] 611482 - WIRE DRIVE 2 Component


Gearbox

Fluid LUBRICATION ENG DUOLEC 1606 ISO 320 (21 GAL)

					Nov2022		
DIAGNOSIS	SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
A Recommendation	Sample Number		Client Info		WC0550857		
No corrective action is recommended at this time.	Sample Date		Client Info		29 Nov 2022		
Resample at the next service interval to monitor.	Machine Age	hrs	Client Info		0		
Wear	Oil Age	hrs	Client Info		0		
All component wear rates are normal.	Oil Changed		Client Info		N/A		
Contamination	Sample Status				ABNORMAL		
Moderate concentration of visible dirt/debris present in the oil.	WEAR METALS		method	limit/base	current	history1	history2
Fluid Condition	Iron	ppm	ASTM D5185m	>150	112		
The AN level is acceptable for this fluid. The	Chromium	ppm	ASTM D5185m	>10	1		
condition of the oil is suitable for further service.	Nickel	ppm	ASTM D5185m	>10	0		
	Titanium	ppm	ASTM D5185m		0		
	Silver	ppm	ASTM D5185m		0		
	Aluminum	ppm	ASTM D5185m	>5	<1		
	Lead	ppm	ASTM D5185m		0		
	Copper	ppm	ASTM D5185m		<1		
	Tin	ppm	ASTM D5185m		0		
	Vanadium	ppm	ASTM D5185m	-	0		
	Cadmium	ppm	ASTM D5185m		0		
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		6		
	Barium	ppm	ASTM D5185m		0		
	Molybdenum	ppm	ASTM D5185m		<1		
	Manganese	ppm	ASTM D5185m		<1		
	Magnesium	ppm	ASTM D5185m		<1		
	Calcium	ppm	ASTM D5185m		11		
	Phosphorus	ppm	ASTM D5185m		416		
	Zinc	ppm	ASTM D5185m		42		
	Sulfur	ppm	ASTM D5185m		6326		
	CONTAMINANTS		method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>20	2		
	Sodium	ppm	ASTM D5185m		<1		
	Potassium	ppm	ASTM D5185m	>20	0		
	FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	Acid Number (AN)	mg KOH/g	ASTM D8045		0.66		
	VISUAL		method	limit/base		history1	history2
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
	Precipitate	scalar	*Visual	NONE	NONE		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE			
	Sand/Dirt	scalar	*Visual	NONE	NONE		
					NORM		
	Appearance	scalar	*Visual	NORML	NORML		
	Appearance Odor	scalar scalar	*Visual *Visual	NORML	NORML		



OIL ANALYSIS REPORT

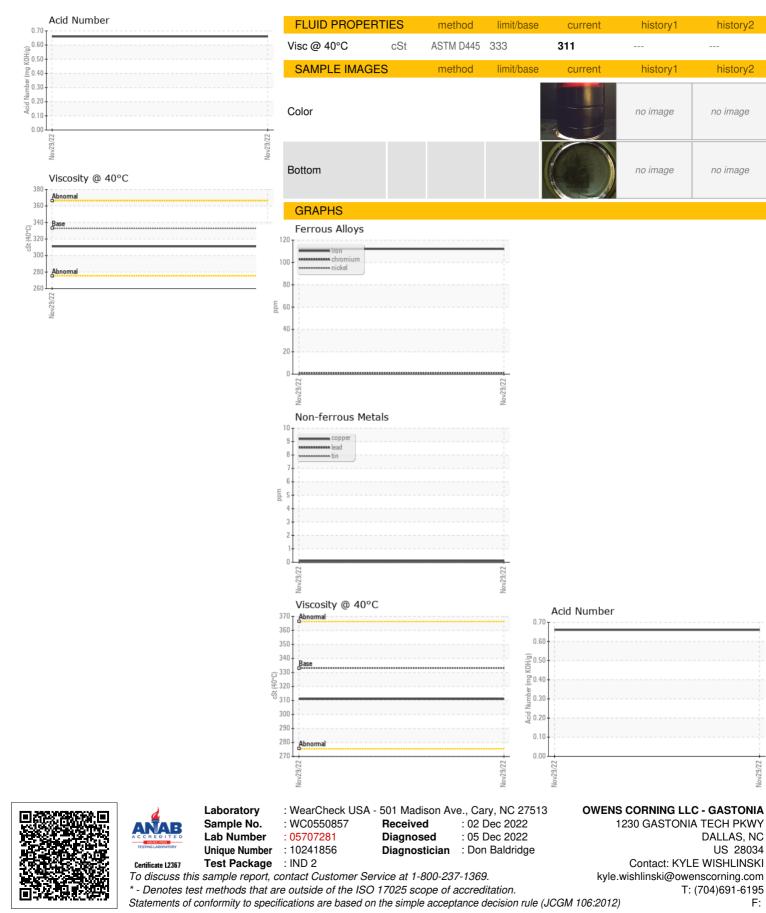

Contact/Location: KYLE WISHLINSKI - OWEDAL

F: