




# OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area  
**[CONHER]**  
 Machine Id  
**CATERPILLAR 375 Compressor Sullair 260 DPQ CA 14 LRC**  
 Component  
**Hydraulic System**  
 Fluid  
**HD SW 10 (25 LTR)**

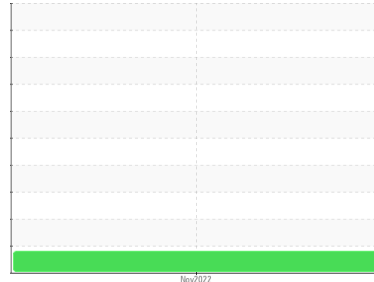

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	<b>KL0011255</b>	---	---
Sample Date	Client Info	<b>16 Nov 2022</b>	---	---
Machine Age	hrs	Client Info	<b>24000</b>	---
Oil Age	hrs	Client Info	<b>300</b>	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ATTENTION</b>	---	---

## WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >20	<b>2</b>	---
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	---
Nickel	ppm	ASTM D5185m >10	<b>0</b>	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---
Silver	ppm	ASTM D5185m	<b>0</b>	---
Aluminum	ppm	ASTM D5185m >10	<b>1</b>	---
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	---
Copper	ppm	ASTM D5185m >75	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---

## ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	<b>1</b>	---
Barium	ppm	ASTM D5185m	<b>0</b>	---
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---
Magnesium	ppm	ASTM D5185m	<b>14</b>	---
Calcium	ppm	ASTM D5185m	<b>3115</b>	---
Phosphorus	ppm	ASTM D5185m	<b>835</b>	---
Zinc	ppm	ASTM D5185m	<b>788</b>	---
Sulfur	ppm	ASTM D5185m	<b>3956</b>	---

## CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	---
Sodium	ppm	ASTM D5185m	<b>3</b>	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	---

## FLUID CLEANLINESS

method	limit/base	current	history 1	history 2
Particles >4µm	ASTM D7647	<b>7760</b>	---	---
Particles >6µm	ASTM D7647 >1300	<b>▲ 1450</b>	---	---
Particles >14µm	ASTM D7647 >160	<b>134</b>	---	---
Particles >21µm	ASTM D7647 >40	<b>26</b>	---	---
Particles >38µm	ASTM D7647 >10	<b>2</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >17/14	<b>▲ 18/14</b>	---	---


## FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.11</b>	---




# OIL ANALYSIS REPORT


## Particle Trend

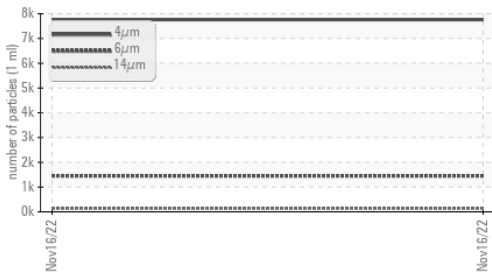


## Particle Trend

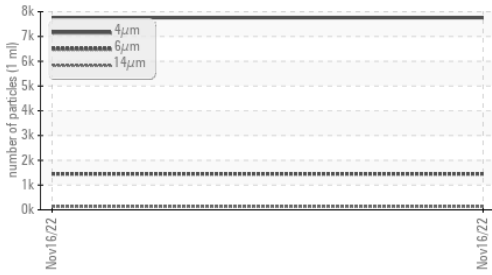

## Acid Number

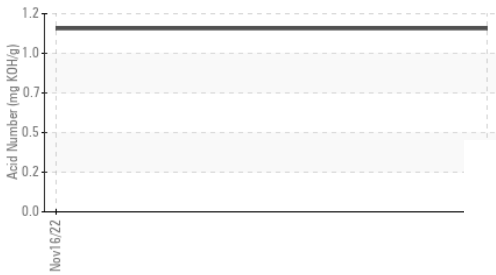

## Viscosity @ 40°C

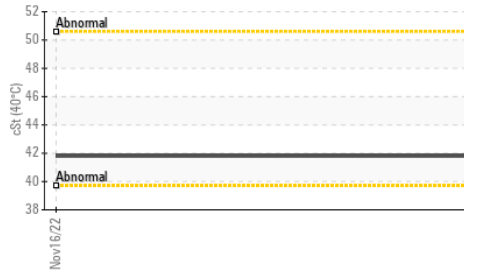

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	41.8	---	---

## SAMPLE IMAGES


method	limit/base	current	history 1	history 2
Color			no image	no image
Bottom			no image	no image

## GRAPHS


### Ferrous Alloys

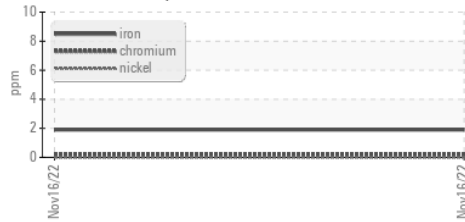


### Non-ferrous Metals

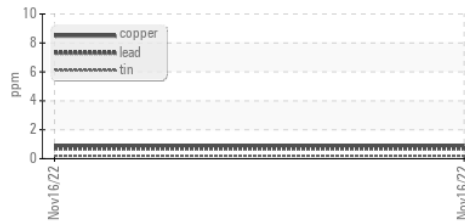

### Viscosity @ 40°C

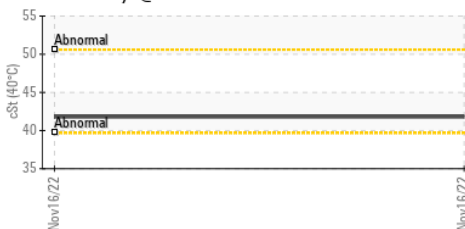

### Particle Count

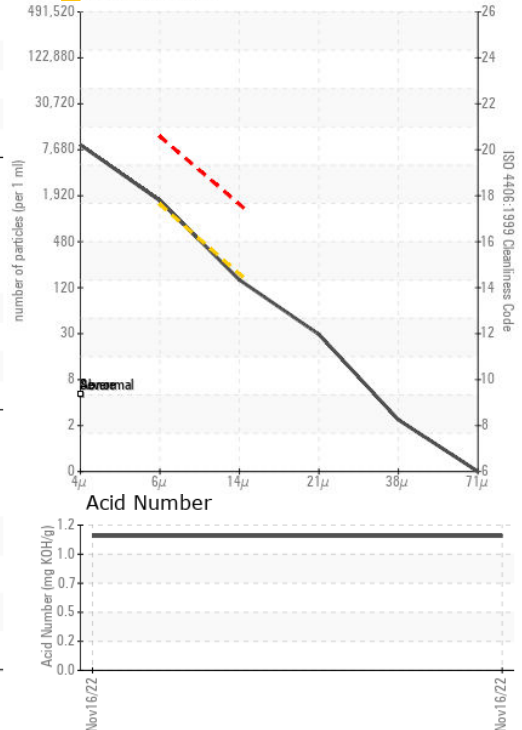

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KL0011255 Received : 06 Dec 2022  
 Lab Number : 05710352 Diagnosed : 08 Dec 2022  
 Unique Number : 10244927 Diagnostician : Don Baldrige  
 Test Package : MOB 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

IBACO

GUAYMAS,  
MX

Contact: JOSE GARCIA  
jefeflota@ibaco.com.mx

T:  
F: