



OIL ANALYSIS REPORT

Sample Rating Trend



DIRT



Machine Id
JK1539-L06

Component
Gasoline Engine

Fluid
PENNZOIL 0W30 SYN (--- QTS)

DIAGNOSIS

▲ Recommendation

The oil is near the end of its useful service life, recommend schedule an oil change. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of seal material. The water content is negligible.

▲ Fluid Condition

The BN level is low. The AN level is at the top-end of the recommended limit.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		WC0751440	---	---
Sample Date	Client Info		25 Oct 2022	---	---
Machine Age	kms	Client Info	76502	---	---
Oil Age	kms	Client Info	48693	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history 1	history 2
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >150	32	---	---
Chromium	ppm	ASTM D5185m >20	1	---	---
Nickel	ppm	ASTM D5185m >5	<1	---	---
Titanium	ppm	ASTM D5185m	8	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >40	14	---	---
Lead	ppm	ASTM D5185m >50	1	---	---
Copper	ppm	ASTM D5185m >155	10	---	---
Tin	ppm	ASTM D5185m >10	<1	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	115	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	24	---	---
Manganese	ppm	ASTM D5185m	2	---	---
Magnesium	ppm	ASTM D5185m	32	---	---
Calcium	ppm	ASTM D5185m	1915	---	---
Phosphorus	ppm	ASTM D5185m	636	---	---
Zinc	ppm	ASTM D5185m	925	---	---
Sulfur	ppm	ASTM D5185m	2636	---	---

CONTAMINANTS





	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >30	▲ 75	---	---
Sodium	ppm	ASTM D5185m >400	3	---	---
Potassium	ppm	ASTM D5185m >20	3	---	---
Fuel	%	ASTM D3524 >4.0	1.6	---	---
Water	%	ASTM D6304 >0.2	0.030	---	---
ppm Water	ppm	ASTM D6304 >2000	309.1	---	---

INFRA-RED

	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844	0.1	---	---
Nitration	Abs/cm	*ASTM D7624 >20	19.2	---	---
Sulfation	Abs./1mm	*ASTM D7415 >30	34.4	---	---



OIL ANALYSIS REPORT





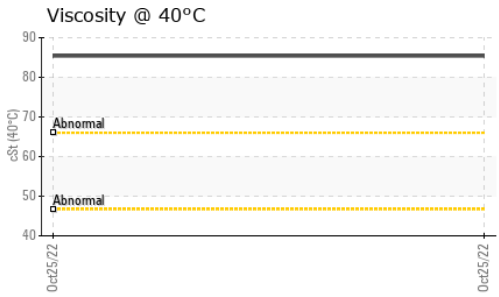
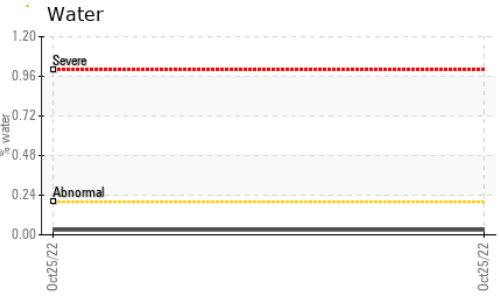
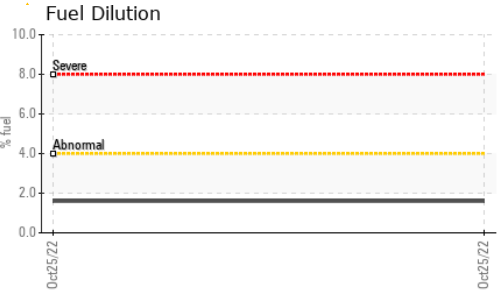
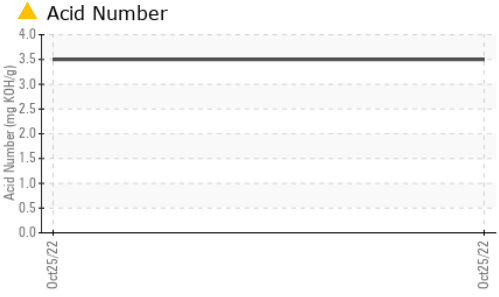


FLUID DEGRADATION	method	limit/base	current	history 1	history 2	
Oxidation	Abs./1mm	*ASTM D7414	>25	43.4	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		▲ 3.50	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		▲ 3.14	---	---

VISUAL	method	limit/base	current	history 1	history 2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 40°C	cSt	ASTM D445		85.4	---	---
Visc @ 100°C	cSt	ASTM D445		13.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270		162	---	---

GRAPHS

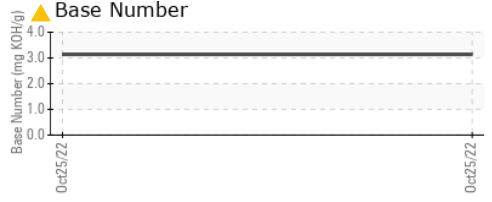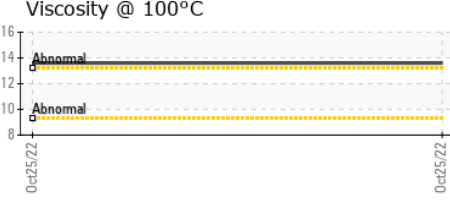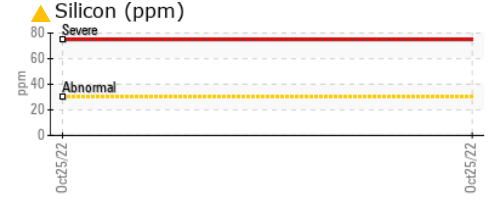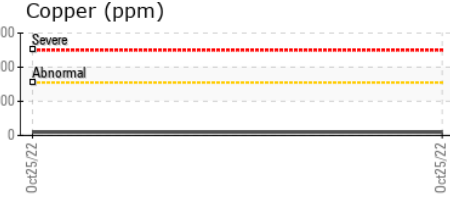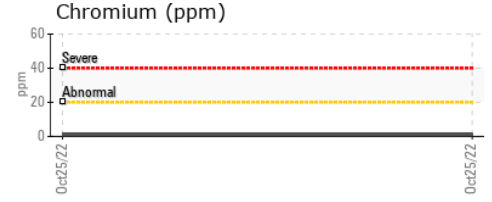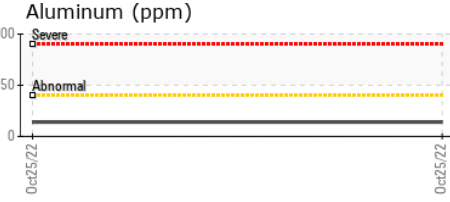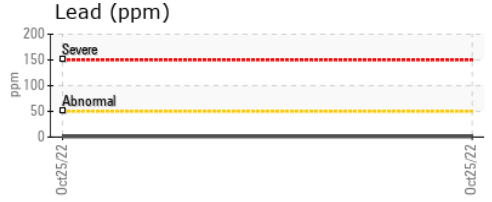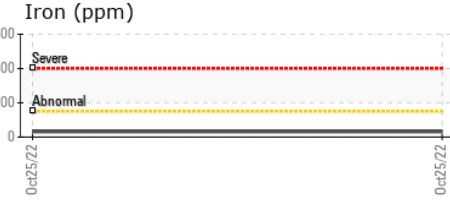

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0751440 **Received** : 06 Dec 2022
Lab Number : **05710533** **Diagnosed** : 13 Dec 2022
Unique Number : 10245108 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FUELDILUTION, KF, KV40, PercentFuel, TBN, VI) Contact: Service Manager

AVL POWERTRAIN ENGINEERING INC
 47519 HALYARD DRIVE
 PLYMOUTH, MI
 US 48170-2438

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)