




# OIL ANALYSIS REPORT



Machine Id  
**CATERPILLAR LOADER L-3**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (12 GAL)**

Sample Rating Trend

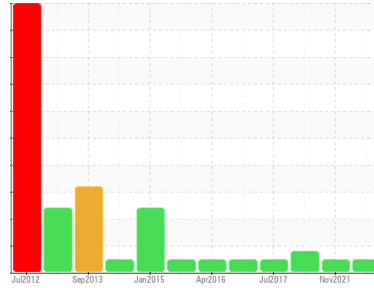

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0721318</b>	WC0542337	WCM2264069
Sample Date	Client Info		<b>30 Nov 2022</b>	26 Nov 2021	26 Jun 2018
Machine Age	hrs	Client Info	<b>60000</b>	28893	0
Oil Age	hrs	Client Info	<b>500</b>	500	0
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >86	<b>30</b>	61	61
Chromium	ppm	ASTM D5185m >3	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m >3	<b>0</b>	<1	2
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >15	<b>2</b>	2	3
Lead	ppm	ASTM D5185m >16	<b>4</b>	13	▲ 14
Copper	ppm	ASTM D5185m >250	<b>8</b>	14	11
Tin	ppm	ASTM D5185m >2	<b>1</b>	2	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	0	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>11</b>	12	128
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>66</b>	68	90
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 450	<b>909</b>	984	689
Calcium	ppm	ASTM D5185m 3000	<b>1116</b>	1200	1298
Phosphorus	ppm	ASTM D5185m 1150	<b>1003</b>	1019	888
Zinc	ppm	ASTM D5185m 1350	<b>1270</b>	1229	1072
Sulfur	ppm	ASTM D5185m 4250	<b>3519</b>	2292	2356

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>4</b>	5	6
Sodium	ppm	ASTM D5185m >158	<b>1</b>	0	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.4</b>	12.2	9.
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.9</b>	25.1	21.

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.8</b>	23.7	19.
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>9.57</b>	7.89	7.09











# OIL ANALYSIS REPORT

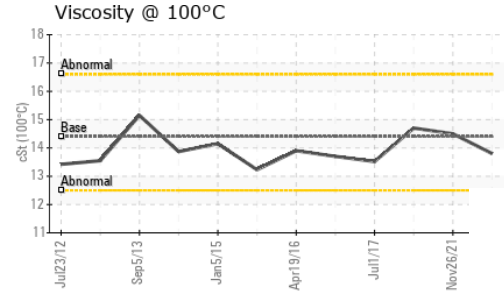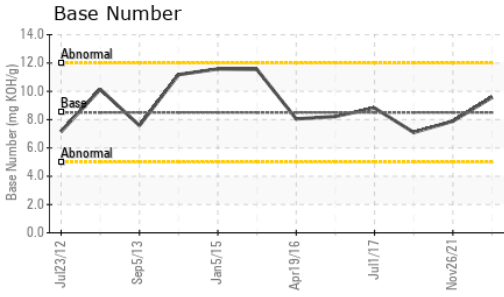

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.8</b>	14.5	14.7

## GRAPHS

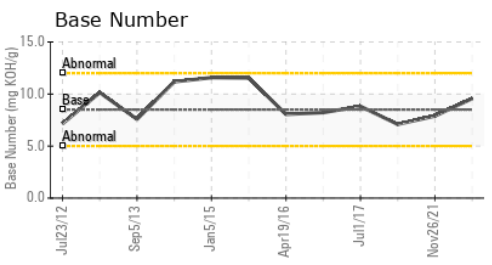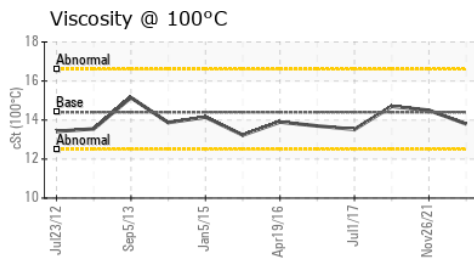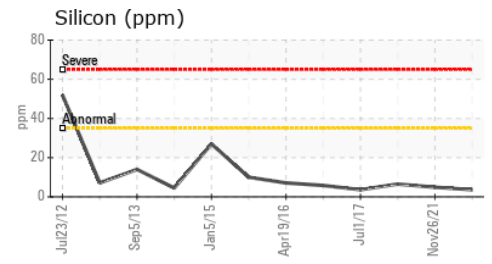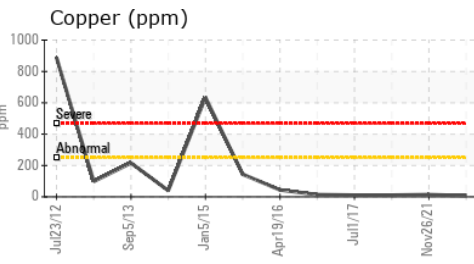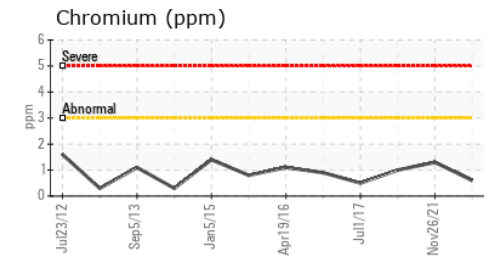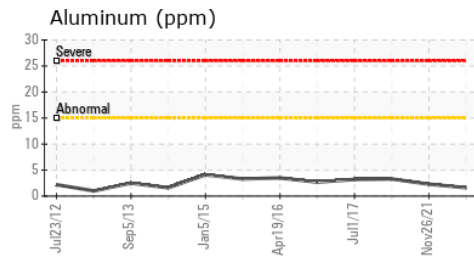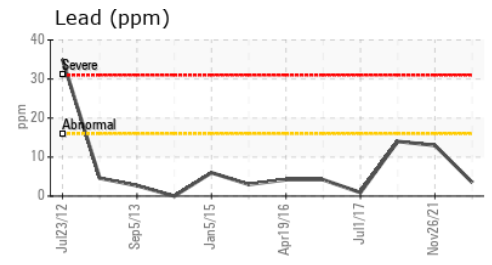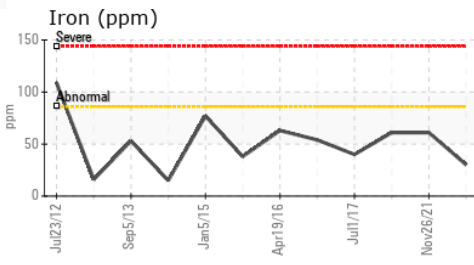

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0721318 **Received** : 09 Dec 2022  
**Lab Number** : **05714170** **Diagnosed** : 13 Dec 2022  
**Unique Number** : 10253746 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**TRESCA BROS SAND & GRAVEL INC**  
 66 MAIN ST  
 MILLIS, MA  
 US 02054  
 Contact: FRAN ROSSI  
 frossi@trescaconcrete.com  
 T: (508)376-2957  
 F: (508)376-4333

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)