



# PROBLEM SUMMARY

Area  
**BARTO**  
 Machine Id  
**6330 [BARTO]**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

Sample Rating Trend




**FUEL**




## COMPONENT CONDITION SUMMARY

▲ Fuel Dilution

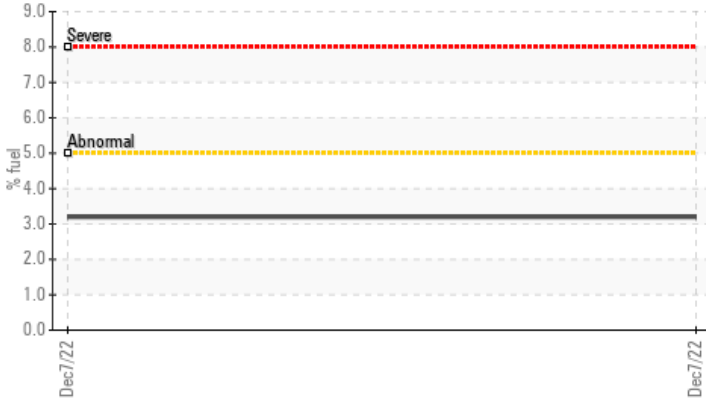

▲ Viscosity @ 100°C

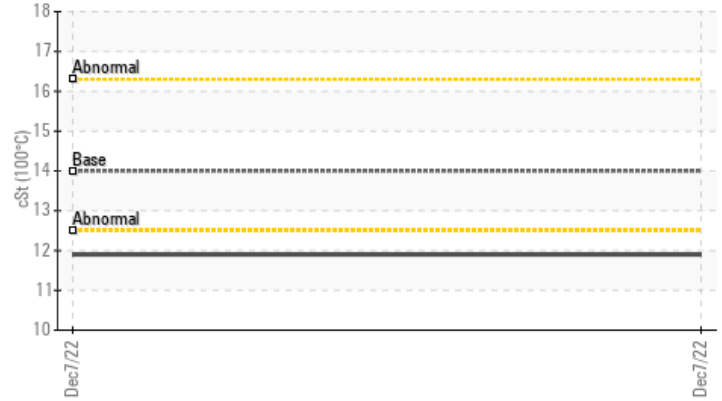

## RECOMMENDATION

We advise that you check the fuel injection system.  
 Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

| Sample Status |     |            |    | <b>ABNORMAL</b> | --- | --- |
|---------------|-----|------------|----|-----------------|-----|-----|
| Fuel          | %   | ASTM D3524 | >5 | ▲ 3.2           | --- | --- |
| Visc @ 100°C  | cSt | ASTM D445  | 14 | ▲ 11.9          | --- | --- |

Customer Id: SCHBARTO  
 Sample No.: SBP0002483  
 Lab Number: 05715785  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

| Action                     | Status | Date | Done By | Description   |
|----------------------------|--------|------|---------|---|
| Check Fuel/injector System | ---    | ---  | ?       | We advise that you check the fuel injection system. |

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



FUEL



Area  
**BARTO**  
 Machine Id  
**6330 [BARTO]**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

| method        | limit/base      | current            | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info     | <b>SBP0002483</b>  | ---      | ---      |
| Sample Date   | Client Info     | <b>07 Dec 2022</b> | ---      | ---      |
| Machine Age   | mls Client Info | <b>662911</b>      | ---      | ---      |
| Oil Age       | mls Client Info | <b>26120</b>       | ---      | ---      |
| Oil Changed   | Client Info     | <b>Not Chngd</b>   | ---      | ---      |
| Sample Status |                 | <b>ABNORMAL</b>    | ---      | ---      |

## CONTAMINATION

| method | limit/base | current    | history1 | history2 |
|--------|------------|------------|----------|----------|
| Glycol | WC Method  | <b>NEG</b> | ---      | ---      |

## WEAR METALS

| method   | limit/base           | current   | history1 | history2 |
|----------|----------------------|-----------|----------|----------|
| Iron     | ppm ASTM D5185m >80  | <b>72</b> | ---      | ---      |
| Chromium | ppm ASTM D5185m >5   | <b>3</b>  | ---      | ---      |
| Nickel   | ppm ASTM D5185m >2   | <b>0</b>  | ---      | ---      |
| Titanium | ppm ASTM D5185m      | <b>0</b>  | ---      | ---      |
| Silver   | ppm ASTM D5185m >3   | <b>0</b>  | ---      | ---      |
| Aluminum | ppm ASTM D5185m >30  | <b>2</b>  | ---      | ---      |
| Lead     | ppm ASTM D5185m >30  | <b>4</b>  | ---      | ---      |
| Copper   | ppm ASTM D5185m >150 | <b>2</b>  | ---      | ---      |
| Tin      | ppm ASTM D5185m >5   | <b>2</b>  | ---      | ---      |
| Vanadium | ppm ASTM D5185m      | <b>0</b>  | ---      | ---      |
| Cadmium  | ppm ASTM D5185m      | <b>0</b>  | ---      | ---      |

## ADDITIVES

| method     | limit/base        | current      | history1 | history2 |
|------------|-------------------|--------------|----------|----------|
| Boron      | ppm ASTM D5185m 0 | <b>9</b>     | ---      | ---      |
| Barium     | ppm ASTM D5185m 0 | <b>0</b>     | ---      | ---      |
| Molybdenum | ppm ASTM D5185m 0 | <b>39</b>    | ---      | ---      |
| Manganese  | ppm ASTM D5185m   | <b>&lt;1</b> | ---      | ---      |
| Magnesium  | ppm ASTM D5185m 0 | <b>820</b>   | ---      | ---      |
| Calcium    | ppm ASTM D5185m   | <b>1681</b>  | ---      | ---      |
| Phosphorus | ppm ASTM D5185m   | <b>940</b>   | ---      | ---      |
| Zinc       | ppm ASTM D5185m   | <b>1183</b>  | ---      | ---      |
| Sulfur     | ppm ASTM D5185m   | <b>3653</b>  | ---      | ---      |

## CONTAMINANTS

| method    | limit/base          | current      | history1 | history2 |
|-----------|---------------------|--------------|----------|----------|
| Silicon   | ppm ASTM D5185m >20 | <b>6</b>     | ---      | ---      |
| Sodium    | ppm ASTM D5185m     | <b>0</b>     | ---      | ---      |
| Potassium | ppm ASTM D5185m >20 | <b>0</b>     | ---      | ---      |
| Fuel      | % ASTM D3524 >5     | <b>▲ 3.2</b> | ---      | ---      |

## INFRA-RED


| method    | limit/base               | current     | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot %    | % *ASTM D7844 >3         | <b>1.8</b>  | ---      | ---      |
| Nitration | Abs/cm *ASTM D7624 >20   | <b>8.6</b>  | ---      | ---      |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | <b>22.5</b> | ---      | ---      |

## FLUID DEGRADATION


| method           | limit/base               | current     | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm *ASTM D7414 >25 | <b>13.6</b> | ---      | ---      |
| Base Number (BN) | mg KOH/g ASTM D2896 9.4  | <b>9.2</b>  | ---      | ---      |




# OIL ANALYSIS REPORT

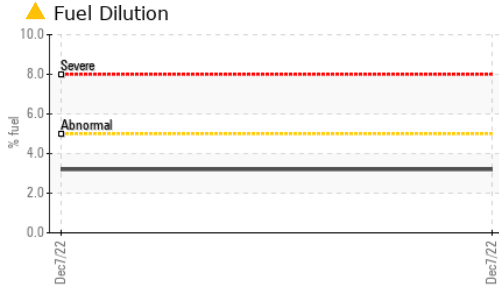





| VISUAL           | method | limit/base | current | history1 | history2 |     |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      | --- |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      | --- |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      | --- |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      | --- |
| Free Water       | scalar | *Visual    |         | NEG      | ---      | --- |

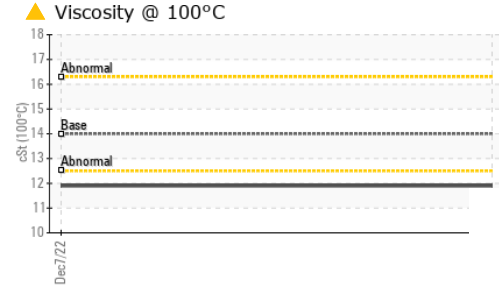

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |     |
|------------------|--------|------------|---------|----------|----------|-----|
| Visc @ 100°C     | cSt    | ASTM D445  | 14      | ▲ 11.9   | ---      | --- |

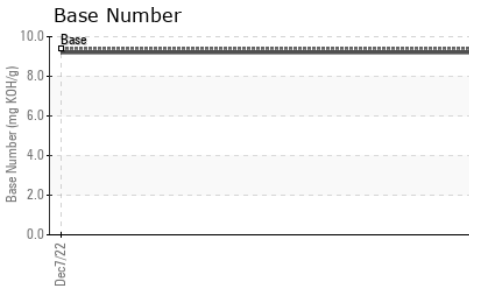

### GRAPHS

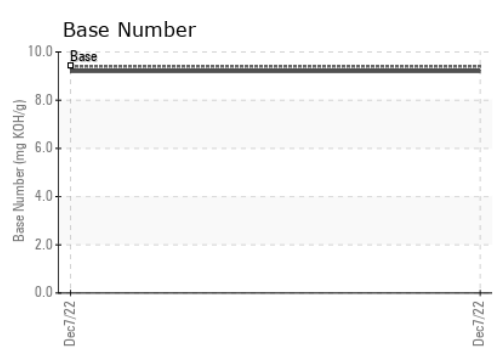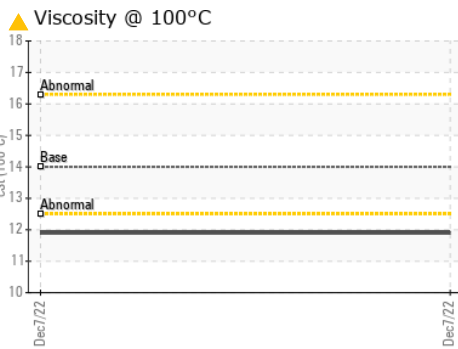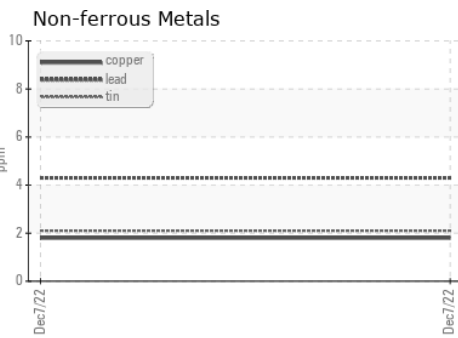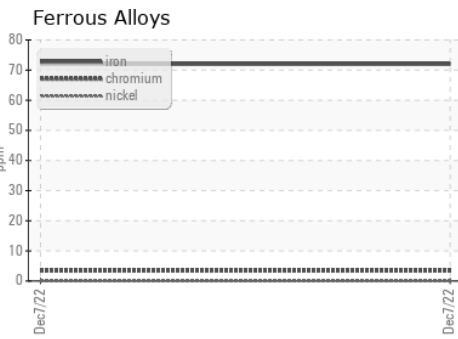

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0002483 **Received** : 12 Dec 2022  
**Lab Number** : 05715785 **Diagnosed** : 14 Dec 2022  
**Unique Number** : 10255361 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**SCHMIDT TRANSPORTATION - BARTO**  
 108 E Bay Road  
 Plattsmouth, NE  
 US 68048  
 Contact: Service Manager

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: