
# **PROBLEM SUMMARY**

## Area {UNASSIGNED} Machine Id FASSI 3803-5155

Component Hydraulic System Fluid NOT GIVEN (50 GAL)

# COMPONENT CONDITION SUMMARY

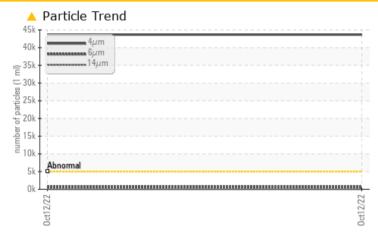

#### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: 50 gallon )

PROBLEMATIC TEST RESULTS										
Sample Status			ABNORMAL							
Particles >4µm	ASTM D7647	>5000	<u> </u>							
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>A</b> 23/17/11							

Customer Id: PALJACNJ Sample No.: WC0747221 Lab Number: 05721933 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

Sample Rating Trend

### Area {UNASSIGNED} Machine Id FASSI 3803-5155

Component Hydraulic System Fluid NOT GIVEN (50 GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: 50 gallon )

### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0747221		
Sample Date		Client Info		12 Oct 2022		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	16		
Chromium	ppm	ASTM D5185m	>10	2		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>75	1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		50		
Calcium	ppm	ASTM D5185m		140		
Phosphorus	ppm	ASTM D5185m		342		
Zinc	ppm	ASTM D5185m		421		
Sulfur	ppm	ASTM D5185m		7026		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	2		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>43667</b>		
Particles >6µm		ASTM D7647	>1300	679		
Particles >14µm		ASTM D7647	>160	19		
Particles >21µm		ASTM D7647	>40	5		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>A</b> 23/17/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2







# **OIL ANALYSIS REPORT**







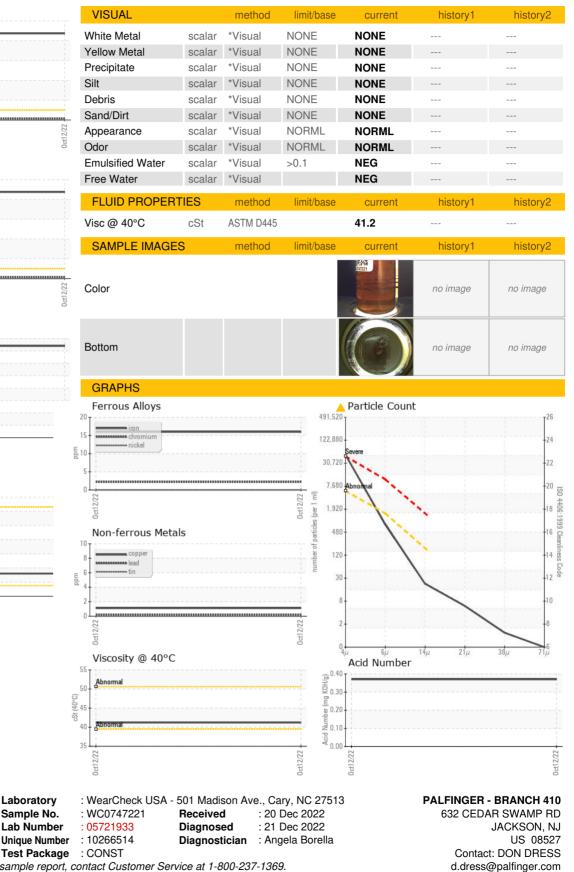

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

回场

Laboratory

Sample No.

Lab Number

Unique Number

Submitted By: TECHNICIAN ACCOUNT

T:

F: