


PROBLEM SUMMARY

Sample Rating Trend



ISO

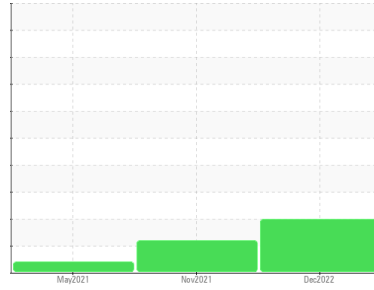


Machine Id
7336667 (S/N 1449)

Component
Compressor

Fluid
KAESER SIGMA (OEM) S-460 (--- QTS)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

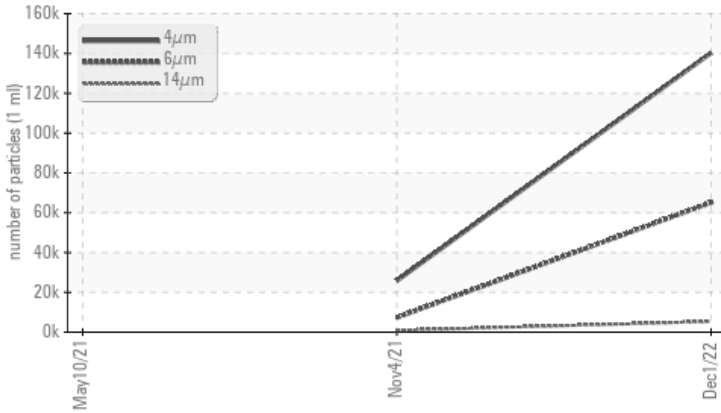

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ASTM D7647	ABNORMAL	ABNORMAL	ABNORMAL
Particles >6µm	>1300	▲ 65085	▲ 7361	---	---
Particles >14µm	>80	▲ 5339	▲ 865	---	---
Particles >21µm	>20	▲ 1006	▲ 116	---	---
Particles >38µm	>4	▲ 11	4	---	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 24/23/20	▲ 20/17	---

Customer Id: ROYBARIN
Sample No.: KC103219
Lab Number: 05724128
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

04 Nov 2021 Diag: Jonathan Hester

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



10 May 2021 Diag: Don Baldrige

VIS DEBRIS




No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



OIL ANALYSIS REPORT

Sample Rating Trend

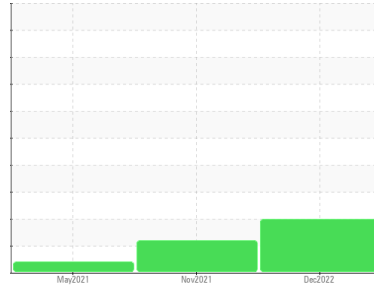

ISO



Machine Id
7336667 (S/N 1449)

Component
Compressor
Fluid
KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KC103219	KC86931	KC72534
Sample Date	Client Info		01 Dec 2022	04 Nov 2021	10 May 2021
Machine Age	hrs	Client Info	3326	3323	3246
Oil Age	hrs	Client Info	3	0	1680
Oil Changed	Client Info		Changed	Changed	Not Changed
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	2	1	<1
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >3	0	0	0
Titanium	ppm	ASTM D5185m >3	0	0	0
Silver	ppm	ASTM D5185m >2	0	<1	<1
Aluminum	ppm	ASTM D5185m >10	<1	<1	1
Lead	ppm	ASTM D5185m >10	0	0	<1
Copper	ppm	ASTM D5185m >50	2	7	5
Tin	ppm	ASTM D5185m >10	0	0	<1
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	3	11
Barium	ppm	ASTM D5185m 90	58	0	29
Molybdenum	ppm	ASTM D5185m	0	0	<1
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m 90	72	29	45
Calcium	ppm	ASTM D5185m 2	2	0	1
Phosphorus	ppm	ASTM D5185m	3	2	0
Zinc	ppm	ASTM D5185m	3	1	0

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	1	1
Sodium	ppm	ASTM D5185m	3	3	7
Potassium	ppm	ASTM D5185m >20	0	<1	3
Water	%	ASTM D6304 >0.05	0.020	0.010	0.015
ppm Water	ppm	ASTM D6304 >500	205.0	102.6	158.5






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		140271	25852	---
Particles >6µm	ASTM D7647 >1300		▲ 65085	▲ 7361	---
Particles >14µm	ASTM D7647 >80		▲ 5339	▲ 865	---
Particles >21µm	ASTM D7647 >20		▲ 1006	▲ 116	---
Particles >38µm	ASTM D7647 >4		▲ 11	4	---
Particles >71µm	ASTM D7647 >3		0	0	---
Oil Cleanliness	ISO 4406 (c) >--/17/13		▲ 24/23/20	▲ 20/17	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	0.40	0.48	0.379


OIL ANALYSIS REPORT

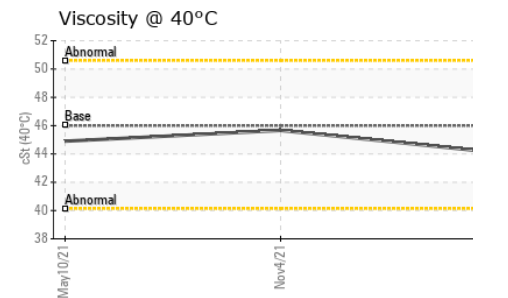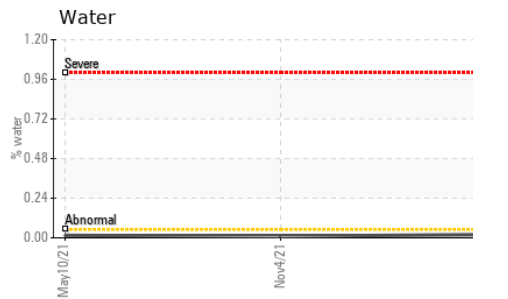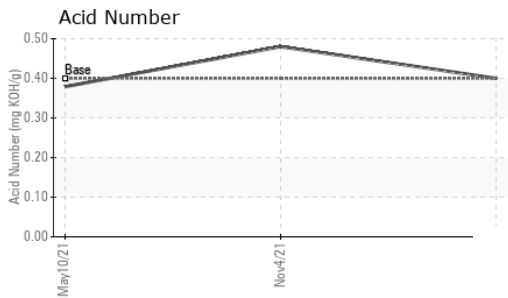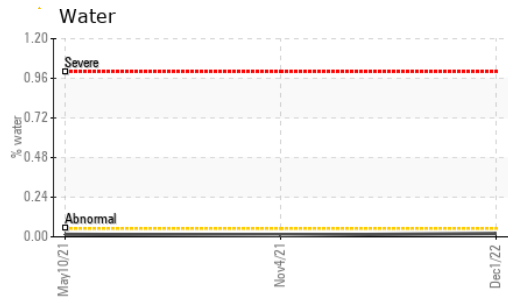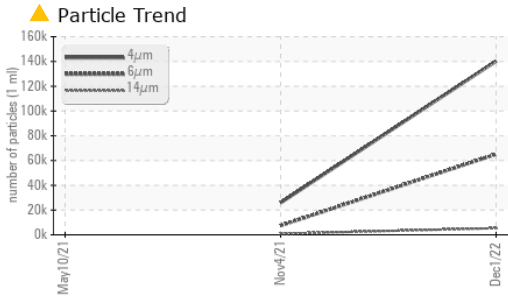





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.1	45.66	44.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

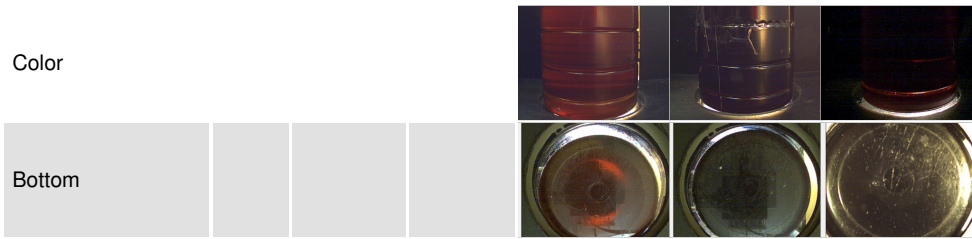

GRAPHS

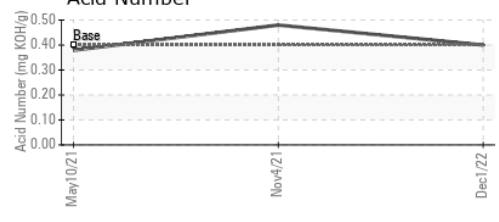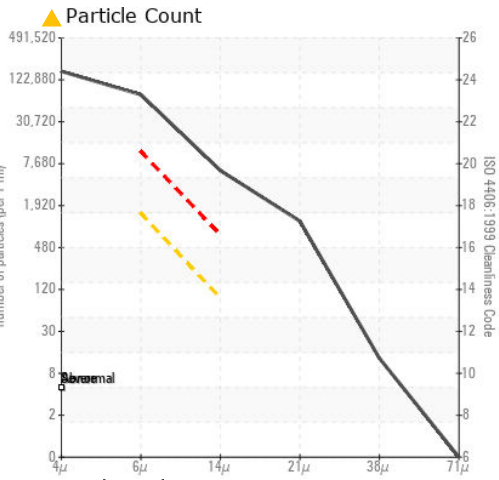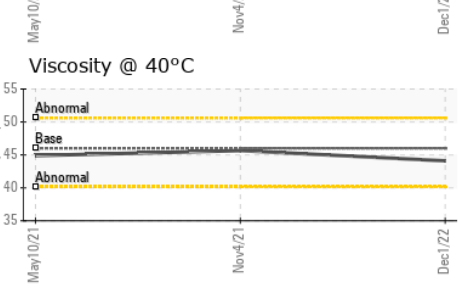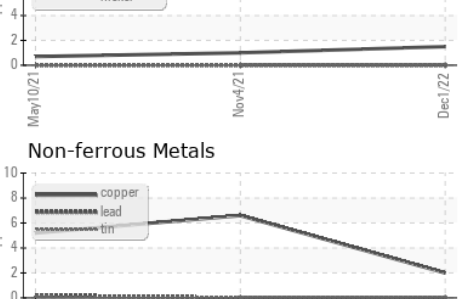

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC103219 **Received** : 22 Dec 2022
Lab Number : 05724128 **Diagnosed** : 24 Dec 2022
Unique Number : 10268709 **Diagnostician** : Don Baldrige
Test Package : IND 2

ROY UMBARGER AND SONS
 111 N BALDWIN ST
 BARGERSVILLE, IN
 US 46106
 Contact: J. LOPER
 jloper1@gmail.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)