




Machine Id
LIEBHERR LH50M 110225-1216
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

Sample Rating Trend

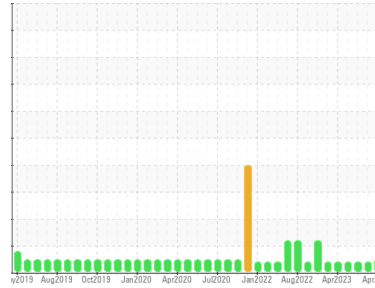

NORMAL

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		LH0209577	LH05999673	LH05891742
Sample Date	Client Info		16 Apr 2022	05 Nov 2023	05 Jul 2023
Machine Age	hrs	Client Info	10750	0	12764
Oil Age	hrs	Client Info	0	13239	0
Oil Changed	Client Info		N/A	Not Changd	Not Changd
Sample Status			NORMAL	ATTENTION	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >66	11	4	4
Chromium	ppm	ASTM D5185m >4	<1	0	0
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >8	2	2	4
Lead	ppm	ASTM D5185m >10	3	0	1
Copper	ppm	ASTM D5185m >74	2	0	2
Tin	ppm	ASTM D5185m >4	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	44	222	46
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	<1	0	<1
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 0	739	87	645
Calcium	ppm	ASTM D5185m	1399	4020	1238
Phosphorus	ppm	ASTM D5185m	755	1051	652
Zinc	ppm	ASTM D5185m	835	1193	754
Sulfur	ppm	ASTM D5185m	3309	2955	2999

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	7	8	6
Sodium	ppm	ASTM D5185m	3	1	2
Potassium	ppm	ASTM D5185m >20	2	0	1



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	11.7	11.3	9.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	26.0	15.3	21.2

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	24.2	10.7	17.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	7.3	14.6	5.6









OIL ANALYSIS REPORT

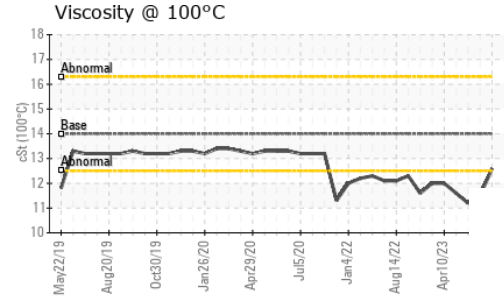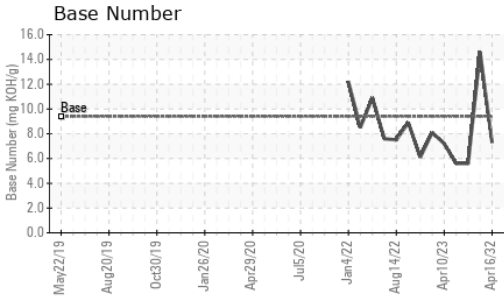

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES			method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14		12.6	▲ 11.5	▲ 11.2

GRAPHS

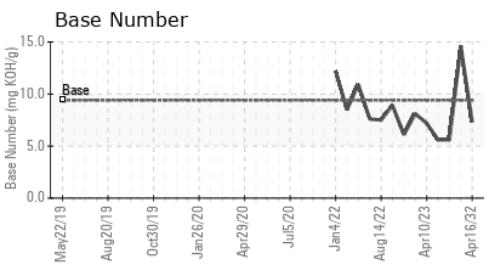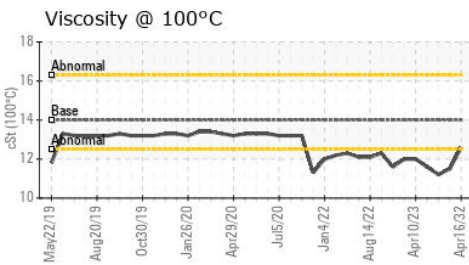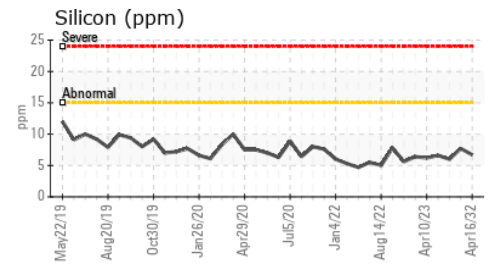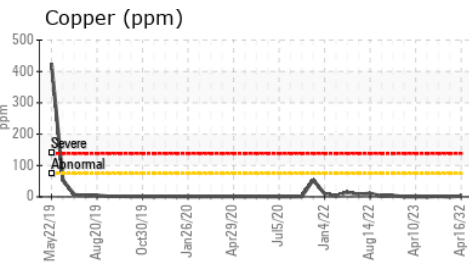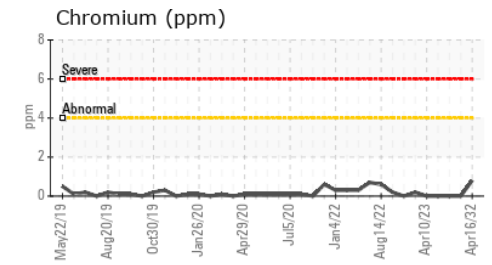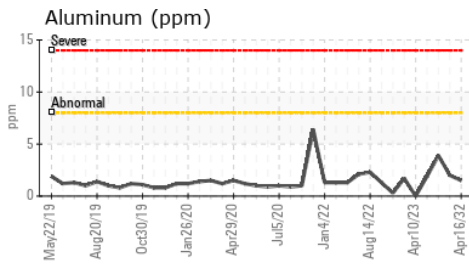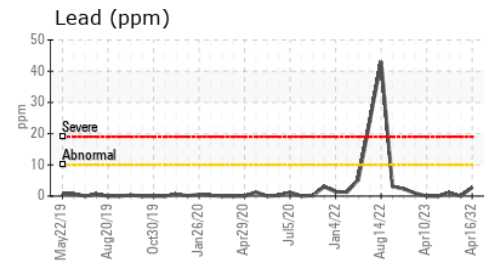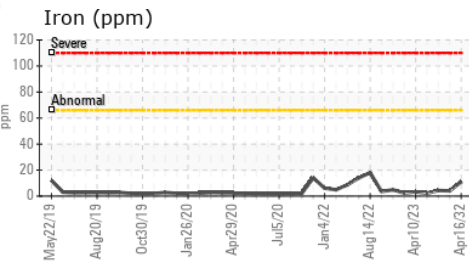

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0209577 **Received** : 23 Dec 2022
Lab Number : **05725311** **Diagnosed** : 27 Dec 2022
Unique Number : 10269892 **Diagnostician** : Wes Davis
Test Package : MOBCE (Additional Tests: TBN)

VERSO CORP - QUINNESEC MILL
 W6791 US HWY 2
 QUINNESEC, MI
 US 49876
 Contact: ERIC LARSON
 eric.larson@versoco.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)