

OIL ANALYSIS REPORT



Machine Id

S/C-2 Component Hydraulic System Fluid AW HYDRAULIC OIL ISO 46 (10 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ST44969	ST37896	ST42232
Sample Date		Client Info		27 Dec 2022	27 Dec 2021	28 Dec 2020
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	<1
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm		>20	0	<1	<1
Tin	ppm	ASTM D5185m	>20	0	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
	ppin		line it /b e e e	-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	2
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	25	<1	<1	<1
Calcium	ppm	ASTM D5185m	200	57	48	49
Phosphorus	ppm	ASTM D5185m	300	341	267	271
Zinc	ppm	ASTM D5185m	370	431	357	365
Sulfur	ppm	ASTM D5185m	2500	1317	1611	1537
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		1	2	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.05	0.004	0.001	0.004
ppm Water	ppm	ASTM D6304	>500	40.2	0.00	43.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3738	3736	4251
Particles >6µm		ASTM D7647	>1300	525	540	522
Particles >14µm		ASTM D7647	>320	25	28	28
Particles >21µm		ASTM D7647	>80	7	7	10
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/15	19/16/12	19/16/12	19/16/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN) 8:48:46) Rev: 1	mg KOH/g	ASTM D8045		0.29 /Location: PAUI	0.116 L DONNDELING	0.278 GER - COOPAW


Report Id: COOPAW [WUSCAR] 05731017 (Generated: 07/08/2024 08:48:46) Rev: 1


Contact/Location: PAUL DONNDELINGER - COOPAW




OIL ANALYSIS REPORT

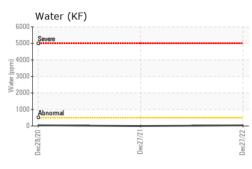



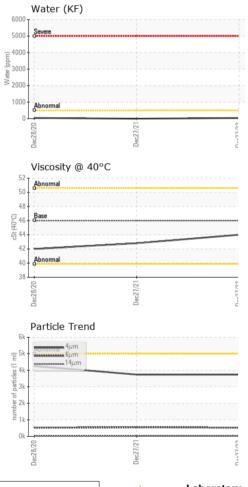



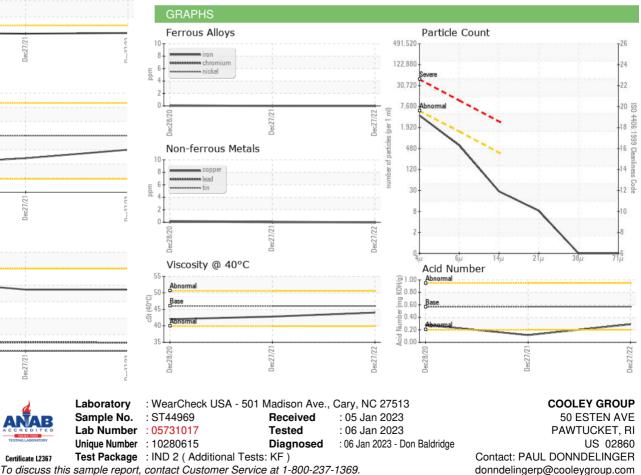

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: COOPAW [WUSCAR] 05731017 (Generated: 07/08/2024 08:48:46) Rev: 1

Certificate 12367

Contact/Location: PAUL DONNDELINGER - COOPAW

T: (401)721-6254

F: (401)726-8620