




# OIL ANALYSIS REPORT

## Sample Rating Trend

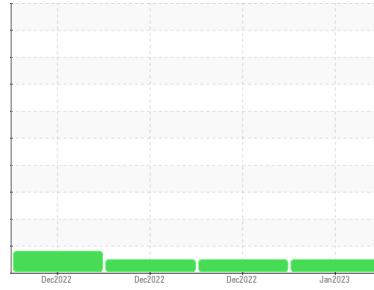

**NORMAL**



Machine Id  
**FP-12 POWER END**

Component

**Pump**

Fluid

{not provided} (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Please note that this is a corrected copy for data entry update for time on oil.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>KL0009581</b>   | KL0009577   | KL0009575   |
| Sample Date        | Client Info |             |            | <b>04 Jan 2023</b> | 21 Dec 2022 | 19 Dec 2022 |
| Machine Age        | hrs         | Client Info |            | <b>20696</b>       | 20523       | 20476       |
| Oil Age            | hrs         | Client Info |            | <b>877</b>         | 695         | 648         |
| Oil Changed        | Client Info |             |            | <b>Not Chngd</b>   | Not Chngd   | Not Chngd   |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current    | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water         | WC Method |        |            | <b>NEG</b> | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >500       | <b>7</b>     | 7        | 6        |
| Chromium    | ppm | ASTM D5185m | >7         | <b>&lt;1</b> | <1       | <1       |
| Nickel      | ppm | ASTM D5185m |            | <b>1</b>     | 1        | 1        |
| Titanium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Silver      | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >25        | <b>&lt;1</b> | <1       | <1       |
| Lead        | ppm | ASTM D5185m | >35        | <b>3</b>     | 2        | 2        |
| Copper      | ppm | ASTM D5185m | >50        | <b>9</b>     | 8        | 7        |
| Tin         | ppm | ASTM D5185m | >5         | <b>2</b>     | 2        | 2        |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>4</b>     | 7        | 9        |
| Barium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>     | <1       | 0        |
| Magnesium  | ppm | ASTM D5185m |            | <b>41</b>    | 45       | 49       |
| Calcium    | ppm | ASTM D5185m |            | <b>198</b>   | 192      | 193      |
| Phosphorus | ppm | ASTM D5185m |            | <b>236</b>   | 267      | 274      |
| Zinc       | ppm | ASTM D5185m |            | <b>93</b>    | 95       | 97       |
| Sulfur     | ppm | ASTM D5185m |            | <b>10661</b> | 10727    | 10753    |





| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >50        | <b>&lt;1</b> | <1       | 1        |
| Sodium       | ppm | ASTM D5185m |            | <b>10</b>    | 12       | 15       |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b>     | <1       | 0        |

| FLUID CLEANLINESS |  | method       | limit/base | current      | history1 | history2 |
|-------------------|--|--------------|------------|--------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   |            | <b>6530</b>  | 10097    | 12179    |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>505</b>   | 758      | 584      |
| Particles >14µm   |  | ASTM D7647   | >160       | <b>43</b>    | 69       | 51       |
| Particles >21µm   |  | ASTM D7647   | >40        | <b>11</b>    | 15       | 10       |
| Particles >38µm   |  | ASTM D7647   | >10        | <b>0</b>     | 1        | 1        |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>0</b>     | 0        | 0        |
| Oil Cleanliness   |  | ISO 4406 (c) | >17/14     | <b>16/13</b> | 17/13    | 16/13    |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 |            | <b>0.30</b> | 0.30     | 0.34     |




# OIL ANALYSIS REPORT

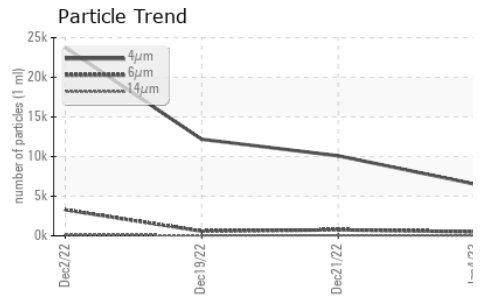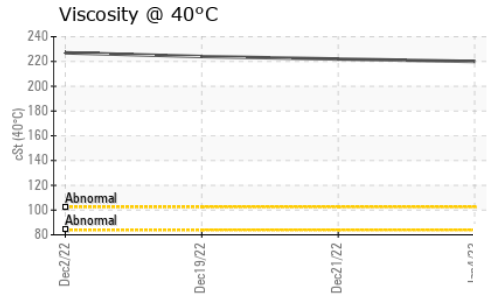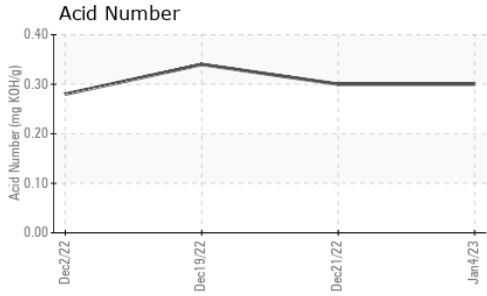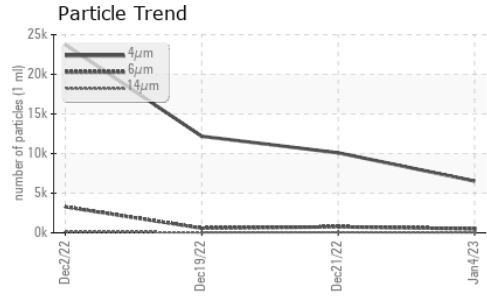






| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | NEG     | NEG      | NEG      |
| Free Water       | scalar | *Visual    | NEG     | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | 220     | 222      | 224      |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

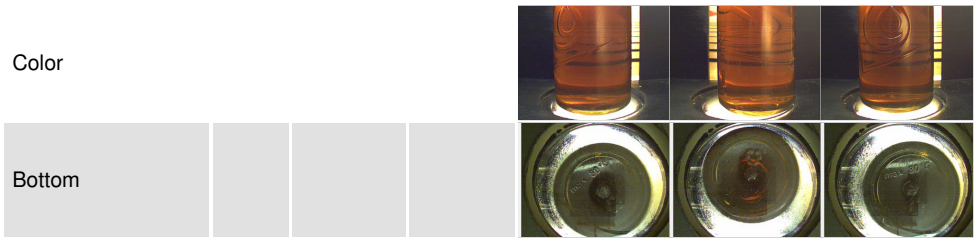

## GRAPHS

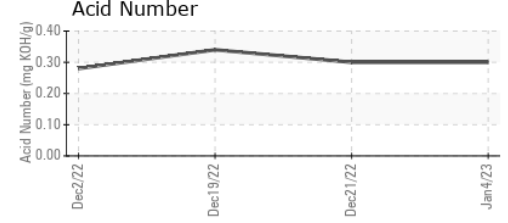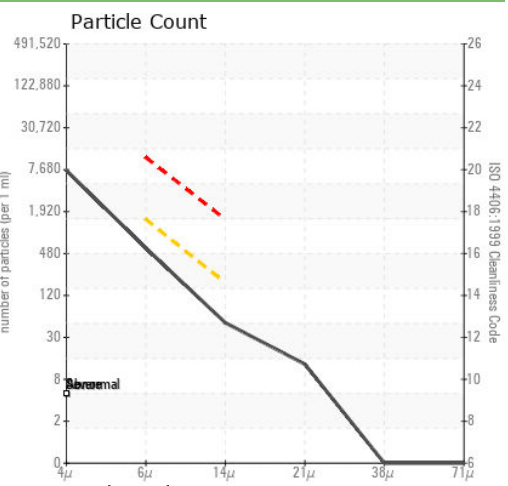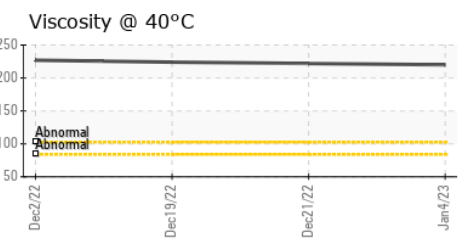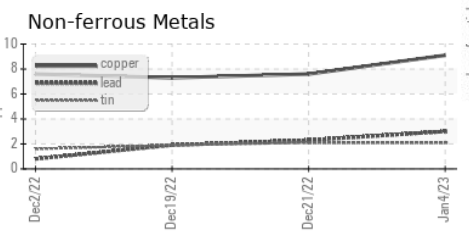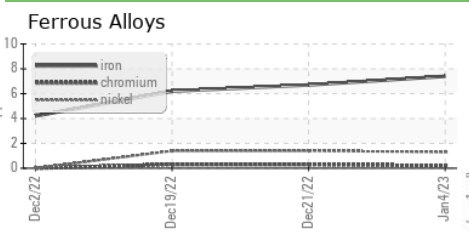

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0009581      **Received** : 11 Jan 2023  
**Lab Number** : 05736077      **Tested** : 12 Jan 2023  
**Unique Number** : 10285675      **Diagnosed** : 12 Jan 2023 - Doug Bogart  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**PUREFRAC LLC**  
 13216 TX-191  
 MIDLAND, TX  
 US 79707  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)