


# **PROBLEM SUMMARY**

# KAESER AS 25T 5102084 (S/N 1058)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

# COMPONENT CONDITION SUMMARY

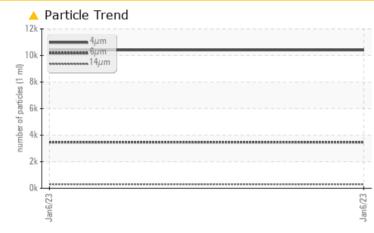

#### RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

# PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	 
Particles >6µm	ASTM D7647 >1300	<b>A</b> 3470	 
Particles >14µm	ASTM D7647 >80	<b>A</b> 303	 
Particles >21µm	ASTM D7647 >20	<u> </u>	 
Oil Cleanliness	ISO 4406 (c) >/17/13	3 🔺 21/19/15	 


Customer Id: CARRALNOR Sample No.: KCP52243 Lab Number: 05741464 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

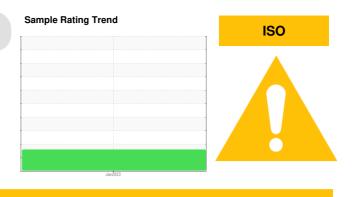

RECOMMENDED	ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

Sample Number

Sample Date

Machine Age

Oil Changed

Sample Status

WEAR METALS

Oil Age

Iron

Nickel

Silver

Lead

Tin

Copper

Vanadium

Cadmium

Titanium

Aluminum

Chromium

## Machine Id KAESER AS 25T 5102084 (S/N 1058) Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## Wear

All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	<1		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	19		
Zinc	ppm	ASTM D5185m	0	0		
Sulfur	ppm	ASTM D5185m	23500	21011		

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.007		
ppm Water	ppm	ASTM D6304	>500	71.8		


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		10401		
Particles >6µm	ASTM D7647	>1300	<b>A</b> 3470		
Particles >14µm	ASTM D7647	>80	<b>A</b> 303		
Particles >21µm	ASTM D7647	>20	<u> </u>		
Particles >38µm	ASTM D7647	>4	3		
Particles >71µm	ASTM D7647	>3	0		
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>A</b> 21/19/15		
FLUID DEGRADATION	method	limit/base	current	history1	history2


Acid Number (AN)


mg KOH/g ASTM D8045 1.0




#### Built for a lifetime."



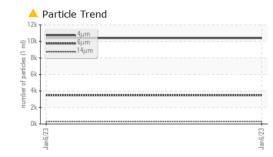

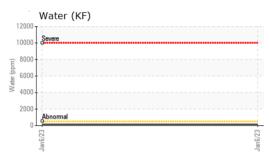

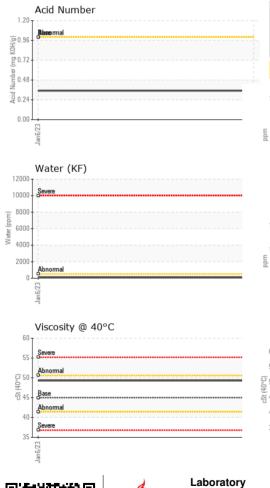

bpm

bpm

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Ddor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
			live it //e e e e			
FLUID PROPERT		method	limit/base	current	history1	history2
/isc @ 40°C	cSt	ASTM D445	45	49.3		
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color					no image	no image
					no image	no image
Bottom					-	
Bottom GRAPHS					-	
GRAPHS				Particle Count	-	
GRAPHS Ferrous Alloys				Particle Count		T <sup>26</sup>
GRAPHS Ferrous Alloys			491,520	Particle Count		[26 _24
GRAPHS Ferrous Alloys			491,520 122,880	Particle Count		-24
GRAPHS Ferrous Alloys			491,520-	Particle Count		
GRAPHS Ferrous Alloys			491,520 122,880	Particle Count		-24 -22
GRAPHS Ferrous Alloys			491,520 122,880 30,720 7,680	Particle Count		-24 -22
GRAPHS Ferrous Alloys			491,520 122,880 30,720 7,680	Particle Count		-24 -22
GRAPHS Ferrous Alloys			491,520 122,880 30,720 7,680	Particle Count		-24 -22
GRAPHS Ferrous Alloys	s		491,520 122,880 30,720 7,680	Particle Count		-24 -22
GRAPHS Ferrous Alloys	5		491,520 122,880 30,720 7,680	Particle Count		-24 -22
GRAPHS Ferrous Alloys	5		491,520- 122,880- 30,720- 7,680- 7,680- 7,680- 7,680- 1,920- 90- 90- 90- 90- 90- 90- 90- 90- 90- 9	Particle Count		-24 -22
GRAPHS Ferrous Alloys	s		491,520- 122,880- 30,720- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 1,92			-24 -22 -20 gd -18 fd -16 gd -16 gd -14 fd -14 fd -12 fd -12 fd
GRAPHS Ferrous Alloys	s		491,520- 122,880- 30,720- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 7,680- 1,92	Particle Count		-24 -22
GRAPHS Ferrous Alloys	s		491,520- 122,880- 30,720- 7,680- 7,680- 7,680- 1,920- 80- 7,680- 1,920-			-24 -22 -20 gd -18 fd -16 gd -16 gd -14 fd -14 fd -12 fd -12 fd
GRAPHS Ferrous Alloys	s		491,520- 122,880- 30,720- 7,680- 7,680- 7,680- 1,920- 80- 7,680- 1,920-			-24 -22 -20 -18 -10 -16 -114 -12 -10
GRAPHS Ferrous Alloys	5		491,520- 122,880- 30,720- 7,680- 7,680- 7,680- 1,920- 80- 1,920-	Bbreemal 4 6µ	14μ 21μ	-24 -22 -20 -18 -10 -16 -114 -12 -10
GRAPHS Ferrous Alloys	s		491,520- 122,880- 30,720 7,680- 7,680- 7,680- 122,880- 7,680- 1,920- 90- 90- 90- 90- 90- 90- 90- 90- 90- 9	Bbresemal		-24 -22 -20 -18 -16 -114 -12 -10 -10 -8 -6
GRAPHS Ferrous Alloys	s		491,520- 122,880- 30,720 7,680- 7,680- 7,680- 122,880- 7,680- 1,920- 90- 90- 90- 90- 90- 90- 90- 90- 90- 9	Bbreemal 4 6µ		-24 -22 -20 -18 -16 -114 -12 -10 -10 -8 -6
GRAPHS Ferrous Alloys	s		491,520- 122,880- 30,720 7,680- 7,680- 7,680- 122,880- 7,680- 1,920- 90- 90- 90- 90- 90- 90- 90- 90- 90- 9	Boresemal Acid Number		-24 -22 -20 -18 -16 -114 -12 -10 -10 -8 -6
GRAPHS Ferrous Alloys	s		491,520- 122,880- 30,720 7,680- 7,680- 7,680- 122,880- 7,680- 1,920- 90- 90- 90- 90- 90- 90- 90- 90- 90- 9	Boresemal Acid Number		-24 -22 -20 -18 -10 -14 -14 -12 -10 -8 -6
GRAPHS Ferrous Alloys	s		491,520- 122,880- 30,720 7,680- 7,680- 7,680- 122,880- 7,680- 1,920- 90- 90- 90- 90- 90- 90- 90- 90- 90- 9	Boresemal Acid Number		-24 -22 -20 -18 -16 -114 -12 -10 -10 -8 -6
Ferrous Alloys	s		491,520- 122,880- 30,720- 7,680- 7,680- 7,680- 7,680- 7,680- 122,80- 122,80- 122,80- 122,80- 120	Boresemal Acid Number		-24 -22 -20 -18 -16 -114 -12 -10 -10 -8 -6
GRAPHS Ferrous Alloys	s		491,520- 122,880- 30,720- 7,680- 7,680- 7,680- 1,920- 1,920- 1,920- 1,920- 30- 1,920- 30- 1,920- 1,920- 1,920- 30- 1,920- 30- 2,- 0,4 0,4 0,4 0,4,48- 0,024- 0,24-	Boresemal Acid Number		-24 -22 -20 -18 -16 -114 -12 -10 -10 -8 -6



Sample No. Lab Number Unique Number : 10296063 Test Package : IND 2 (Additional Tests: KF, PrtCount) Certificate L2367

WENDY\_M\_SITKO@CARMAX.COM To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: KCP52243

: 05741464

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: 17 Jan 2023

: 18 Jan 2023

Diagnostician : Don Baldridge

Received

Diagnosed

Contact/Location: WENDY SITKO - CARRALNOR

CARMAX 7102

RALEIGH, NC

US 27612

T:

F:

8520 GLENWOOD AVE

Contact: WENDY SITKO