




COOLANT REPORT

Sample Rating Trend

NORMAL

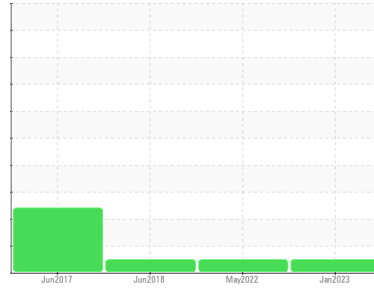

Area
KANSAS/44/Sh-Bulk Tanks
 Machine Id
Shop 3 Tanks [KANSAS^44^Sh-Bulk Tanks]

Component
Coolant
 Fluid
CAT EXTENDED LIFE COOLANT (ELC) (--- GAL)

DIAGNOSIS

Recommendation

The fluid is suitable for further service.

Corrosion

All metal levels are normal indicating no corrosion in the cooling system.

Contaminants

There is no indication of any contamination in the coolant.

Coolant Condition

Glycol and nitrite levels are acceptable. The pH level of this fluid is within the acceptable limits. The carboxylate level of this fluid is acceptable.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0746060	WC0697721	WCCF1565
Sample Date	Client Info		17 Jan 2023	03 May 2022	28 Jun 2018
Machine Age	hrs	Client Info	6927	6927	0
Oil Age	hrs	Client Info	6927	6927	0
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

PHYSICAL TEST RESULTS

	method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298		1.067	1.067	---
pH	Scale 0-14 ASTM D1287		8.14	8.27	8.28
Nitrites	ppm AP-053:2009		712	600	676
Reserve Alkalinity	Scale 0-20 *ASTM D1121		---	---	---
Percentage Glycol	% ASTM D3321		49.8	49.9	50
Freezing Point	°F ASTM D3321		-33	-33	-38
Total Dissolved Solids			307.0	334.0	412.5
Carboxylate			pass	pass	pass

CORROSION INHIBITORS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D6130	0	21	12	3
Phosphorus	ppm ASTM D6130	0	0	<1	1
Boron	ppm ASTM D6130	0	8	0	0
Molybdenum	ppm ASTM D6130	950	955	1108	415

CORROSION

	method	limit/base	current	history1	history2
Iron	ppm ASTM D6130	>15	<1	0	0
Aluminum	ppm ASTM D6130	>10	<1	0	2
Copper	ppm ASTM D6130	>10	<1	<1	0
Lead	ppm ASTM D6130	>10	0	0	0
Tin	ppm ASTM D6130	>10	0	0	<1
Silver	ppm ASTM D6130	>10	---	---	0
Zinc	ppm ASTM D6130		<1	0	0

CONTAMINANTS

	method	limit/base	current	history1	history2
Chlorine	ppm ASTM D6130		7	0	---

CARRIER SALTS


	method	limit/base	current	history1	history2
Sodium	ppm ASTM D6130		4403	2653	3269
Potassium	ppm ASTM D6130		47	9	6







SCALE POTENTIAL

	method	limit/base	current	history1	history2
Calcium	ppm ASTM D6130		<1	0	<1
Magnesium	ppm ASTM D6130		<1	0	0






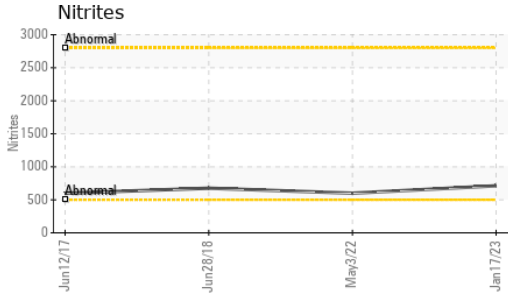


COOLANT REPORT



VISUAL	method	limit/base	current	history1	history2
Coolant Color	*Visual		Red	Red	Orange
Coolant Appearance	*Visual	Clear	normal	normal	normal
Color					
Bottom					

GRAPHS

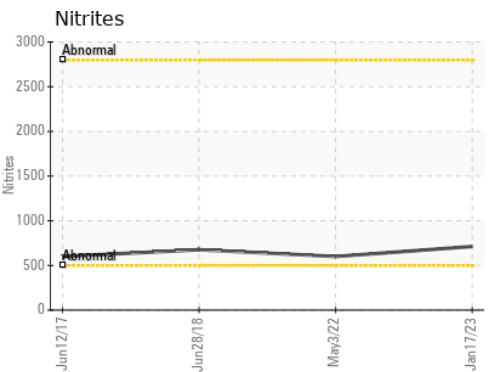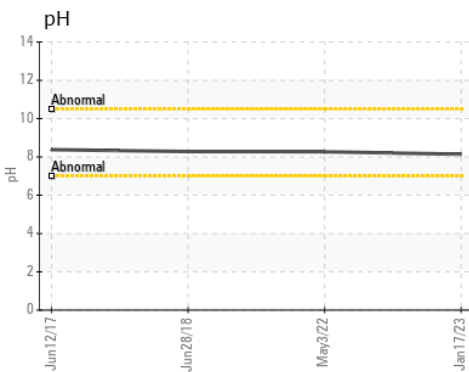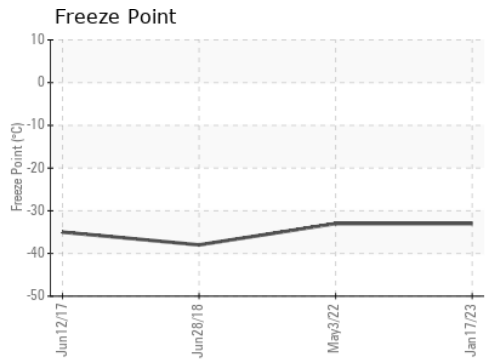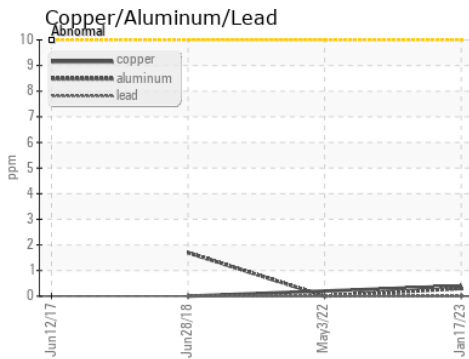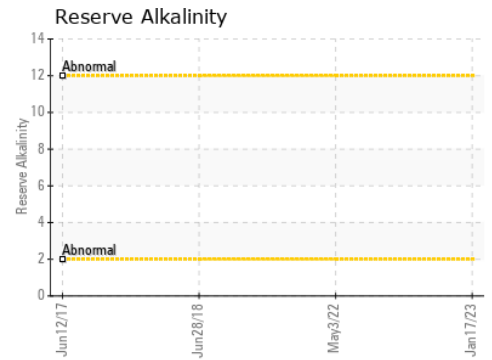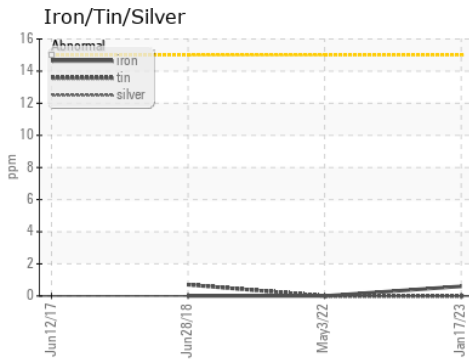

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0746060 **Received** : 23 Jan 2023
Lab Number : 05746823 **Diagnosed** : 25 Jan 2023
Unique Number : 10306427 **Diagnostician** : Jonathan Hester
Test Package : COOL- (Additional Tests: COOL, ICP)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)