


PROBLEM SUMMARY

Machine Id VACUUM DEGASSER Component

Vacuum Pump Fluid LEYBONOL LVO 120 (--- GAL)

COMPONENT CONDITION SUMMARY

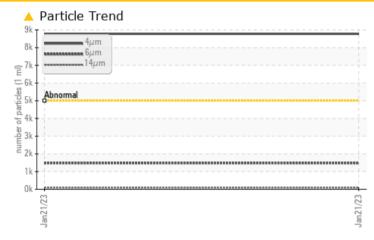

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry updates.

PROBLEMATIC TEST RESULTS								
Sample Status			ATTENTION					
Particles >4µm	ASTM D7647	>5000	<u> </u>					
Particles >6µm	ASTM D7647	>1300	<u> </u>					
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<u> </u>					


Customer Id: GENWAR Sample No.: WC0758504 Lab Number: 05751404 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

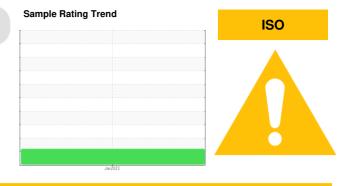

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Filter			?	We recommend you service the filters on this component.		

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

ISO

VACUUM DEGASSER

Vacuum Pump Filuid LEYBONOL LVO 120 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry updates.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jan2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0758504		
Sample Date		Client Info		21 Jan 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	0		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		40		
Phosphorus	ppm	ASTM D5185m		333		
Zinc	ppm	ASTM D5185m		425		
Sulfur	ppm	ASTM D5185m		5288		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m	-	0		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304		0.004		
ppm Water	ppm	ASTM D6304	>.1	46.6		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	A 8780		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14μm		ASTM D7647	>160	94		
Particles >21µm		ASTM D7647	>40	20		
Particles >38μm		ASTM D7647	>10	2		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	A 20/18/14		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.61		



OIL ANALYSIS REPORT

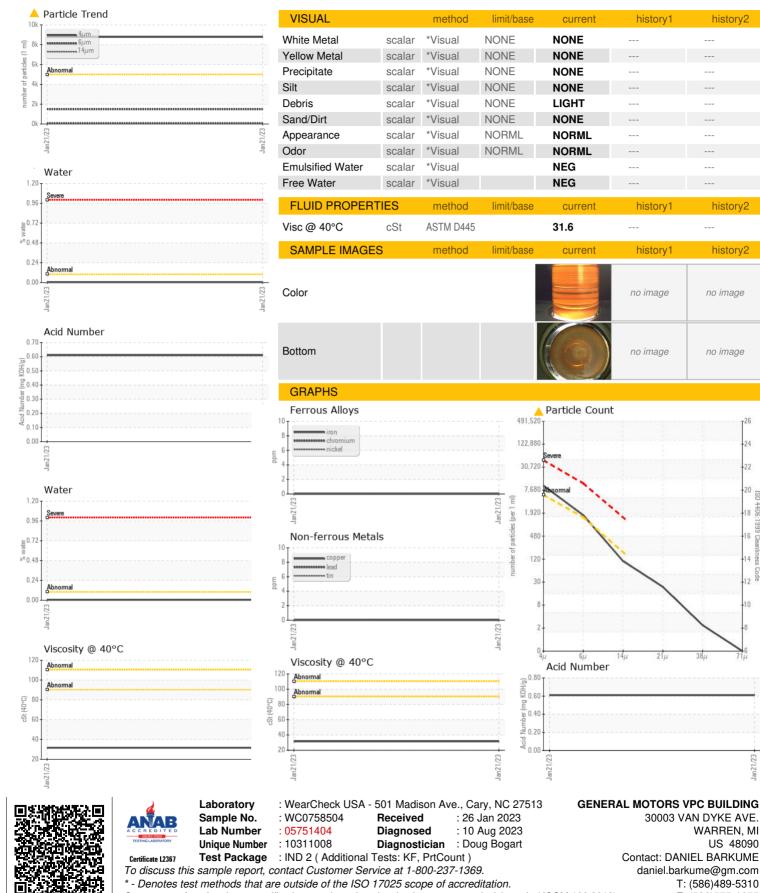

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DANIEL BARKUME - GENWAR

history1

history

history1

no image

no image

214

28

30003 VAN DYKE AVE.

Contact: DANIEL BARKUME

daniel.barkume@gm.com

history2

history2

history2

no image

no image

4406

:1999 Cle

14

WARREN, MI

T: (586)489-5310

F: (586)575-1675

US 48090