

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

KAESER 2793855 Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

hrs hrs hrs ppm ppm ppm ppm ppm ppm ppm ppm ppm pp	Client Info Client Info Client Info Client Info Client Info ASTM D5185m ASTM D5185m	limit/base >50 >10 >3 >2 >10 >50 >10 >50 >10 >50 >10 S0 >10 S0 >10 0 90 0 90 0	<1 0 0 0 0 0 0 2 0 0 0 0	KCP27366 05 Jan 2021 51196 1892 Changed ABNORMAL 12 0 0 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 01 02 03 04 05 05 06 07 08 09 100 100 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 <	
hrs ppm ppm ppm ppm ppm ppm ppm ppm ppm pp	Client Info Client Info Client Info Astm D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >10 Iimit/base	52027 0 Changed ATTENTION <urrent 0 0 0 0 0 0 0 0 0 0 0 0 0</urrent 	51196 1892 Changed ABNORMAL 2 0 0 0 0 4 1 0 3 0 0 0 3 0 0 0 0 0 0 0 0 0 0 0 0 0	 history2 -
hrs ppm ppm ppm ppm ppm ppm ppm ppm ppm pp	Client Info Client Info Client Info Astm D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >10 Iimit/base	52027 0 Changed ATTENTION <urrent 0 0 0 0 0 0 0 0 0 0 0 0 0</urrent 	51196 1892 Changed ABNORMAL 2 0 0 0 0 4 1 0 3 0 0 0 3 0 0 0 0 0 0 0 0 0 0 0 0 0	 history2 -
hrs ppm ppm ppm ppm ppm ppm ppm ppm ppm pp	Client Info Client Info Client Info Astm D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >10 Iimit/base	0 Changed ATTENTION <1	1892 Changed ABNORMAL 2 0 0 0 0 3 (1 0 3 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	 history2 -
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	Client Info method ASTM D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >10 Iimit/base	Changed ATTENTION <urr> <1 0 0<!--</td--><td>Changed ABNORMAL 2 0 0 0 0 1 1 1 0 3 0 1 0 0 0 0 0 0 0 0 0</td><td> history2 -</td></urr>	Changed ABNORMAL 2 0 0 0 0 1 1 1 0 3 0 1 0 0 0 0 0 0 0 0 0	 history2 -
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >10 Iimit/base	ATTENTION	ABNORMAL history1 2 0 0 0 <1	history2
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >10 Iimit/base	<1 0 0 0 0 0 0 2 0 2 0 0 0 0 0 0 0 0	2 0 0 () () () () () () () () () () () () ()	 history2
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	>50 >10 >3 >2 >10 >10 >50 >10 >10 Iimit/base	<1 0 0 0 0 0 0 2 0 2 0 0 0 0 0 0 0 0	2 0 0 () () () () () () () () () () () () ()	 history2
ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	>10 >3 >3 >2 >10 >10 >50 >10 Iimit/base 0 90	0 0 0 0 0 2 0 2 0 0 0 0 0 0 0 0 0	0 0 3 0 0 0 0 0 0 10 10 <1	 history2
ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	>3 >3 >2 >10 >10 >50 >10 imit/base 0 90	0 0 0 0 2 0 2 0 0 0 0 0 0 0 0	0 0 <1 <1 0 3 0 0 0 0 0 0 0 0 0 10 10 <1	 history2
ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	>3 >2 >10 >10 >50 >10 >10 	0 0 0 2 0 0 0 0 0 current 0 0	0 <1 <1 0 3 0 0 0 0 0 0 0 0 0 0 1 0 10 <1	 history2
ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	>2 >10 >10 >50 >10 imit/base 0 90	0 0 2 0 0 0 0 0 current 0 0	<1 <1 <1 0 3 0 0 0 0 0 0 history1 10 <1	 history2
ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	>10 >10 >50 >10 limit/base 0 90	0 0 2 0 0 0 0 current 0 0	<1 0 3 0 0 0 0 0 0 history1 10 <1	 history2
ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>10 >50 >10 limit/base 0 90	0 2 0 0 0 0 <u>current</u> 0 0	0 3 0 0 0 0 0 <u>history1</u> 10 <1	 history2
ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>50 >10 limit/base 0 90	2 0 0 0 0 <u>current</u> 0 0	3 0 0 0 0 <u>history1</u> 10 <1	 history2
ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	>10 limit/base 0 90	0 0 0 0 <u>current</u> 0 0	0 0 0 0 <u>history1</u> 10 <1	 history2
ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	limit/base 0 90	0 0 current 0 0	0 0 0 <u>history1</u> 10 <1	 history2
ppm ppm ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	0 90	0 0 current 0 0	0 0 <u>history1</u> 10 <1	 history2
ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m	0 90	0 current 0 0	0 history1 10 <1	 history2
ppm ppm	method ASTM D5185m ASTM D5185m	0 90	current 0 0	history1 10 <1	history2
ppm	ASTM D5185m ASTM D5185m	0 90	0 0	10 <1	
ppm	ASTM D5185m	90	0	<1	
			-		
ppm	ASTM D5185m	0	•	0	
			U	0	
ppm	ASTM D5185m		0	<1	
ppm	ASTM D5185m	100	54	50	
ppm	ASTM D5185m	0	1	0	
ppm	ASTM D5185m	0	4	0	
ppm	ASTM D5185m	0	15	23	
ppm	ASTM D5185m	23500	19316	16351	
	method	limit/base	current	historv1	history2
		220	-		
		>20			
				223.6	
ESS					history2
	ASTM D7647		4377	12956	
		>1300			
	ASTM D7647	>80		▲ 194	
			40		
			-		
	ISO 4406 (c)	>/17/13		▲ 19/15	
	()				history
	method	- inni/base	current	nistory I	history2
mg KOH/g	ASTM D8045	1.0	0.37	0.359	
	ppm ppm ppm % ppm	ppm ASTM D5185m ppm ASTM D5185m ppm ASTM D5185m % ASTM D6304 ppm ASTM D6304 ESS method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c)	ppm ASTM D5185m >25 ppm ASTM D5185m ppm ASTM D5185m >20 % ASTM D6304 >0.05 ppm ASTM D6304 >500 ESS method limit/base ASTM D7647 >1300 ASTM D7647 ASTM D7647 >80 ASTM D7647 ASTM D7647 >20 ASTM D7647 ASTM D7647 >4 ASTM D7647 ASTM D7647 >3 ISO 4406 (c)	ppm ASTM D5185m >25 0 ppm ASTM D5185m 14 ppm ASTM D5185m >20 3 % ASTM D5185m >20 3 ppm ASTM D6304 >0.05 0.031 ppm ASTM D6304 >500 319.6 ESS method limit/base current ASTM D7647 >1300 1181 ASTM D7647 >80 108 ASTM D7647 >20 40 ASTM D7647 >4 7 ASTM D7647 >3 3 ISO 4406 (c) >/17/13 19/17/14	ppm ASTM D5185m >25 0 <1

Report Id: ANDMORCA [WUSCAR] 05752127 (Generated: 03/15/2024 08:48:03) Rev: 1


Contact/Location: J. VILLAREAL - ANDMORCA





0.00

口品

OIL ANALYSIS REPORT

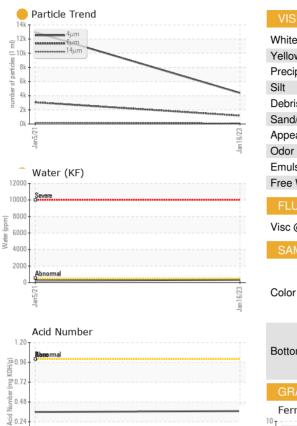



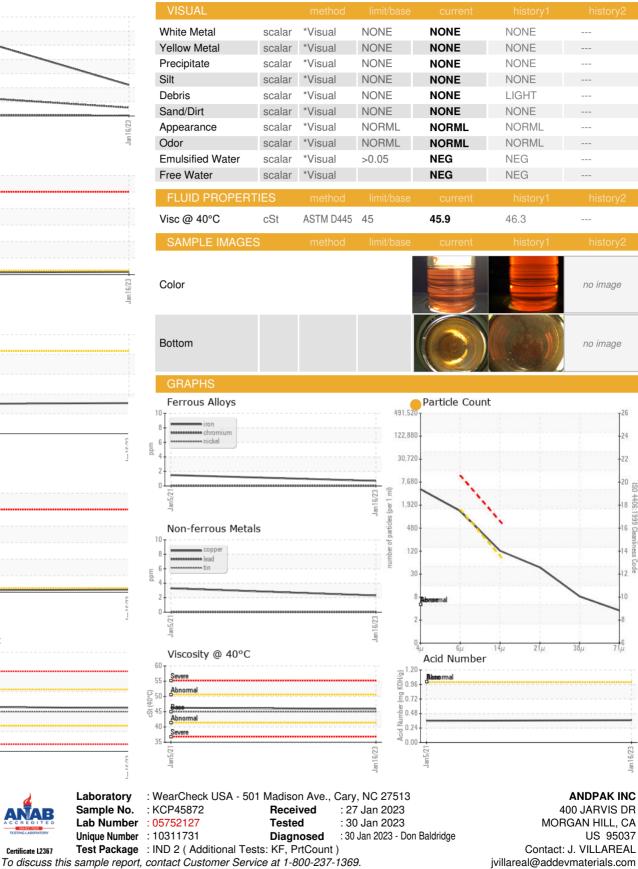

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

T:

F: