

### **OIL ANALYSIS REPORT**

# Sample Rating Trend



## KAESER SM 10 6493320 (S/N 1012)

Compressor

KAESER SIGMA (OEM) M-460 (--- QTS)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info	innibacco	KCP45828	KCP35110	KCP27811
Sample Date		Client Info		28 Nov 2022	27 Jan 2022	26 Jan 2021
Machine Age	hrs	Client Info		20600	17328	13460
Oil Age	hrs	Client Info		3300	4000	3300
Oil Changed	1110	Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron Chromium	ppm	ASTM D5185m ASTM D5185m	>50	0	<1 0	0
Nickel	ppm	ASTM D5185m	>10	0	0	
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m		0	<1	0
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm ppm	ASTM D5185m		6	7	3
Tin		ASTM D5185m	>50	0	0	0
Antimony	ppm	ASTM D5185m	210		0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ppm	_	1			
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	90	0	0	45
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	100	1	<1	67
Calcium	ppm	ASTM D5185m		0	0	<1
Phosphorus	ppm	ASTM D5185m	0	4	25	4
Zinc	ppm	ASTM D5185m		0	3	0
Sulfur	ppm	ASTM D5185m	23500	18666	16163	17523
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		0	0	30
Potassium	ppm	ASTM D5185m		<1	<1	4
Water	%	ASTM D6304	>0.05	0.002	0.003	0.016
ppm Water	ppm	ASTM D6304	>500	19.0	36.9	162.1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1179	11965	3524
Particles >6µm		ASTM D7647	>1300	229	<b>4</b> 710	1117
Particles >14µm		ASTM D7647	>80	8	<b>5</b> 20	🔺 175
Particles >21µm		ASTM D7647	>20	2	<b>1</b> 48	<b>5</b> 0
Particles >38µm		ASTM D7647	>4	0	<b>^</b> 7	1
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/15/10	19/16	A 17/15
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.40	0.46	0.416
2:34:50) Rev: 1	Contact/Location: SHOP Manager - INDGRACO					


Report Id: INDGRACO [WUSCAR] 05752165 (Generated: 09/27/2023 12:34:50) Rev: 1


Contact/Location: SHOP Manager - INDGRACO




**OIL ANALYSIS REPORT** 

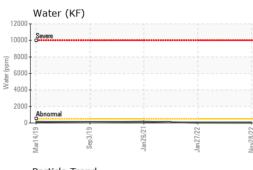

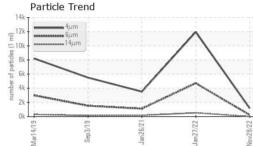

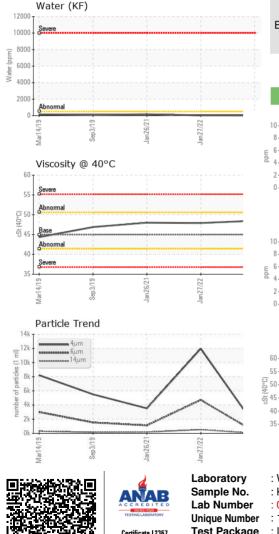

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	48.5	47.9	48.0
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color						
Bottom				$\bigcirc$		

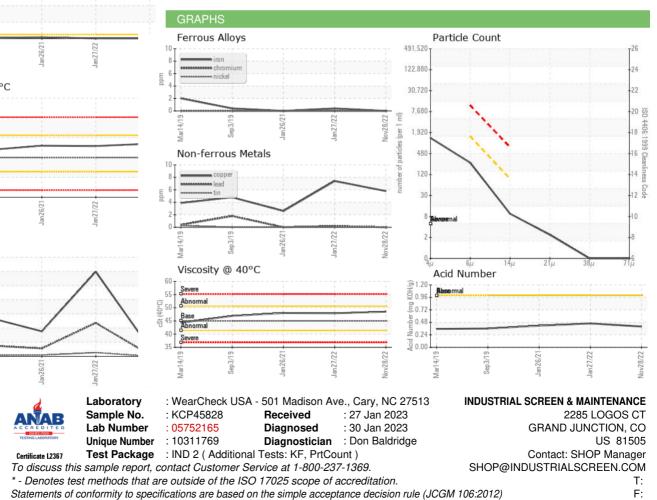

Contact/Location: SHOP Manager - INDGRACO