


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id KAESER SK 20 7344307 (S/N 1450)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		0ct202i) May2021	Dec2021 J:	n2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC106027	KC95438	KC92922
Sample Date		Client Info		27 Jan 2023	22 Dec 2021	27 May 2021
Machine Age	hrs	Client Info		9864	7262	3950
Oil Age	hrs	Client Info		2602	5787	2475
Oil Changed		Client Info		Changed	Changed	Not Changd
Sample Status				NORMAL	ATTENTION	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m		15	18	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m	7.0		0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	14
Barium	ppm	ASTM D5185m	90	0	0	77
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	90	27	28	84
Calcium	ppm	ASTM D5185m	2	0	0	2
Phosphorus	ppm	ASTM D5185m	_	5	4	1
Zinc	ppm	ASTM D5185m		7	0	0
CONTAMINANTS		method	limit/base	-		history2
				current	history1	
Silicon	ppm	ASTM D5185m	>25	0	<1	0
Sodium	ppm	ASTM D5185m		6	6	1
Potassium	ppm	ASTM D5185m	- = 0	3	5	0
Water	%	ASTM D6304	>0.05	0.017	0.009	0.027
ppm Water	ppm	ASTM D6304	>500	176.3	92.1	278.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1727	6324	5925
Particles >6µm		ASTM D7647	>1300	614	▲ 1653	1444
Particles >14μm		ASTM D7647	>80	40	1 16	122
Particles >21µm		ASTM D7647		9	19	3 9
Particles >38µm		ASTM D7647	>4	0	2	3
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/12	1 8/14	1 8/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.37	0.353	0.375



OIL ANALYSIS REPORT

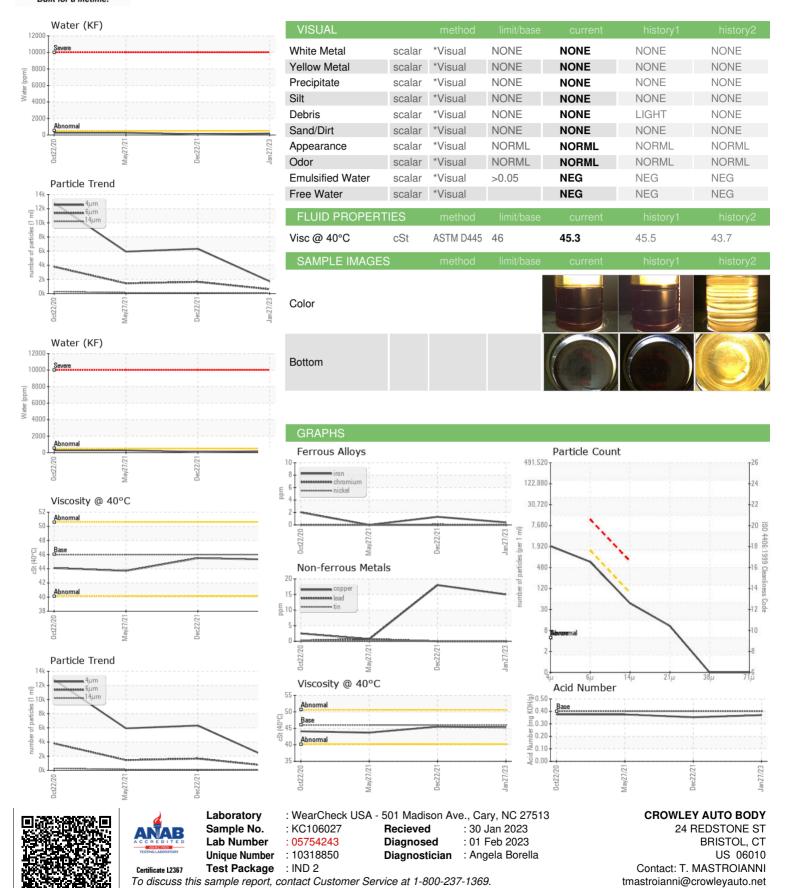

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: