




OIL ANALYSIS REPORT

Sample Rating Trend

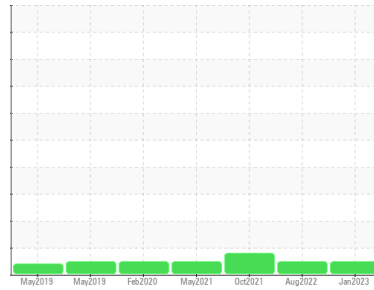

NORMAL



Machine Id
HUSKY H2
 Component
Hydraulic System
 Fluid
USPI FG AIR 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	USP234913	USP205134	USP205146
Sample Date	Client Info	30 Jan 2023	11 Aug 2022	12 Oct 2021
Machine Age	mths Client Info	0	0	0
Oil Age	mths Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	SEVERE

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<1	<1	3
Chromium	ppm ASTM D5185m >20	<1	<1	1
Nickel	ppm ASTM D5185m >20	0	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m	0	0	0
Aluminum	ppm ASTM D5185m >20	0	<1	<1
Lead	ppm ASTM D5185m >20	0	0	0
Copper	ppm ASTM D5185m >20	0	<1	<1
Tin	ppm ASTM D5185m >20	0	<1	0
Antimony	ppm ASTM D5185m	---	---	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	0	0	<1
Barium	ppm ASTM D5185m 0	0	2	0
Molybdenum	ppm ASTM D5185m 0	0	0	<1
Manganese	ppm ASTM D5185m	0	0	0
Magnesium	ppm ASTM D5185m 0	<1	0	0
Calcium	ppm ASTM D5185m 0	0	<1	<1
Phosphorus	ppm ASTM D5185m 0	434	394	248
Zinc	ppm ASTM D5185m 0	18	11	37
Sulfur	ppm ASTM D5185m 0	396	490	558

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	5	4	<1
Sodium	ppm ASTM D5185m	0	<1	0
Potassium	ppm ASTM D5185m >20	0	0	0
Water	% ASTM D6304 >0.05	0.005	0.003	0.005
ppm Water	ppm ASTM D6304 >500	51.8	29.3	53.5

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	123	425	1978
Particles >6µm	ASTM D7647 >1300	35	121	198
Particles >14µm	ASTM D7647 >160	4	19	15
Particles >21µm	ASTM D7647 >40	1	6	3
Particles >38µm	ASTM D7647 >10	0	1	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	14/12/9	16/14/11	18/15/11

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.15	0.27	0.33	0.346



OIL ANALYSIS REPORT

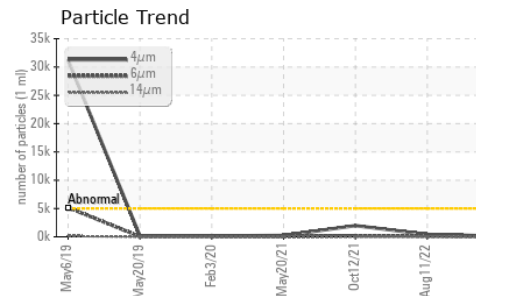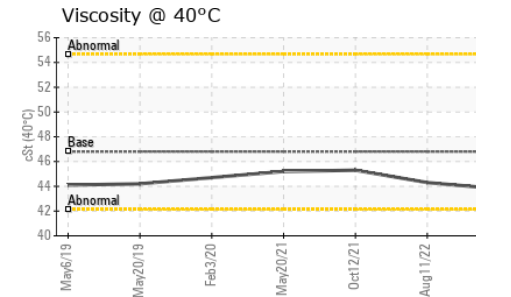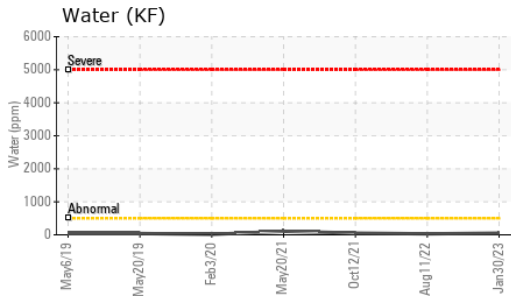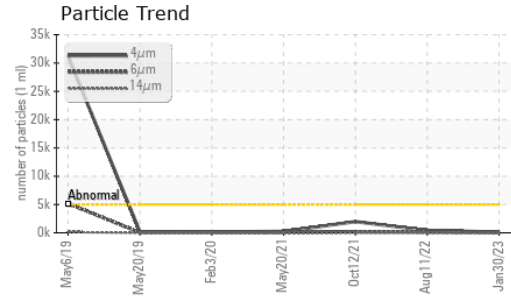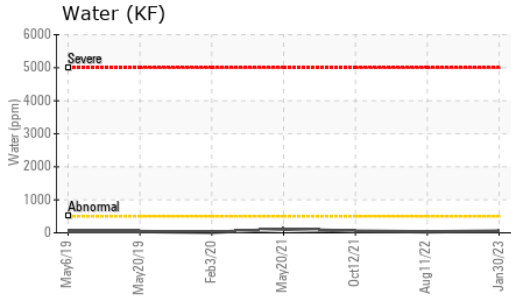

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.8	43.8	44.3





SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color

Bottom

MPC

GRAPHS

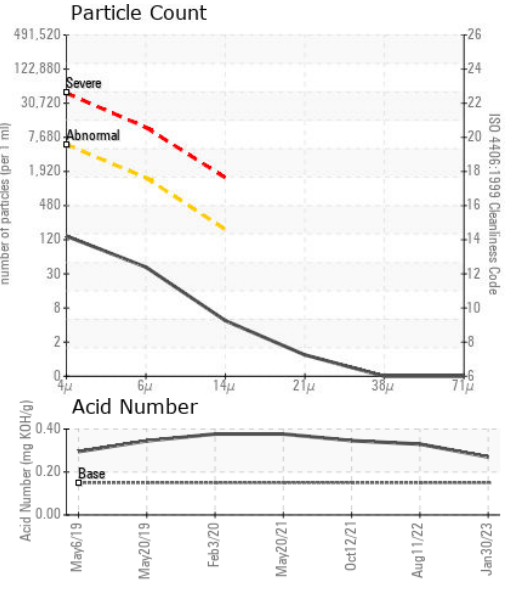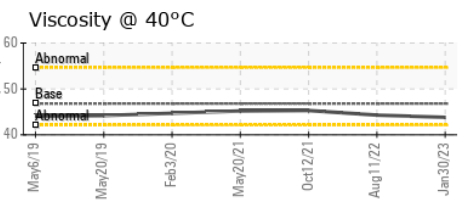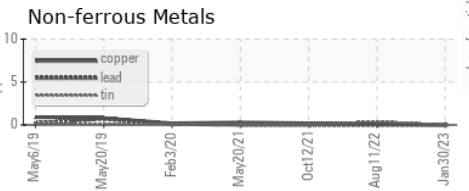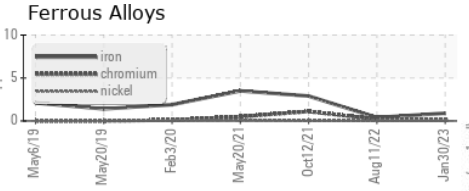

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USP234913 **Received** : 31 Jan 2023
Lab Number : 05754962 **Diagnosed** : 01 Feb 2023
Unique Number : 10319569 **Diagnostician** : Doug Bogart
Test Package : IND 2

NIAGARA BOTTLING
 500 N SARA RD
 YUKON, OK
 US 73099
 Contact: DON LEVINGS
 dlevings@niagarawater.com
 T: (580)628-0101
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)