




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

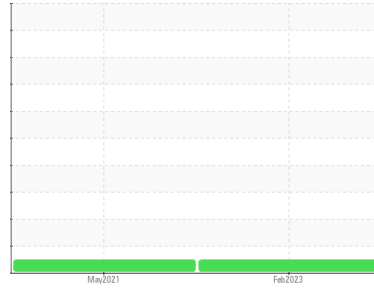

Area  
**CALENDER**  
 Machine Id  
**[CALENDER] EXTR\_020 EXTRUDER 020 GB**  
 Component  
**Gearbox**  
 Fluid  
**MOBIL MOBILGEAR 600 XP 320 (250 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0688505</b>	WC0574465	---
Sample Date	Client Info		<b>05 Feb 2023</b>	24 May 2021	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>69</b>	---	---
Iron	ppm	ASTM D5185m >200	<b>31</b>	120	---
Chromium	ppm	ASTM D5185m >15	<b>0</b>	1	---
Nickel	ppm	ASTM D5185m >15	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	<b>0</b>	1	---
Aluminum	ppm	ASTM D5185m >25	<b>0</b>	4	---
Lead	ppm	ASTM D5185m >100	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >200	<b>&lt;1</b>	1	---
Tin	ppm	ASTM D5185m >25	<b>0</b>	0	---
Antimony	ppm	ASTM D5185m >5	<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>17</b>	33	---
Barium	ppm	ASTM D5185m	<b>4</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	2	---
Calcium	ppm	ASTM D5185m	<b>2</b>	3	---
Phosphorus	ppm	ASTM D5185m	<b>310</b>	308	---
Zinc	ppm	ASTM D5185m	<b>2</b>	0	---
Sulfur	ppm	ASTM D5185m	<b>19494</b>	14898	---

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>3</b>	41	---
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.69</b>	0.684	---




# OIL ANALYSIS REPORT

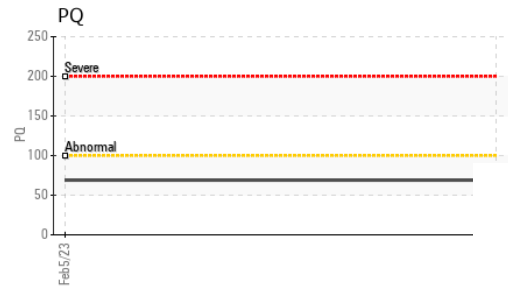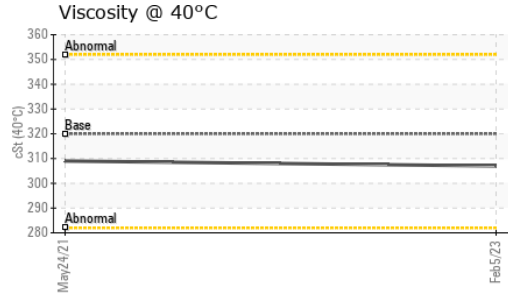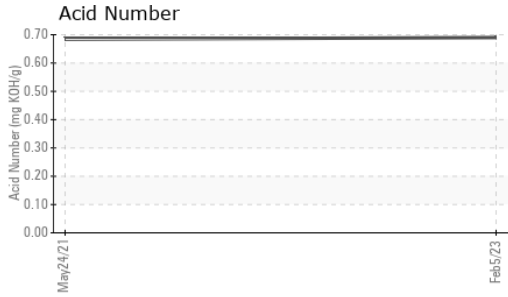






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>MODER</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	320	<b>307</b>	309	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

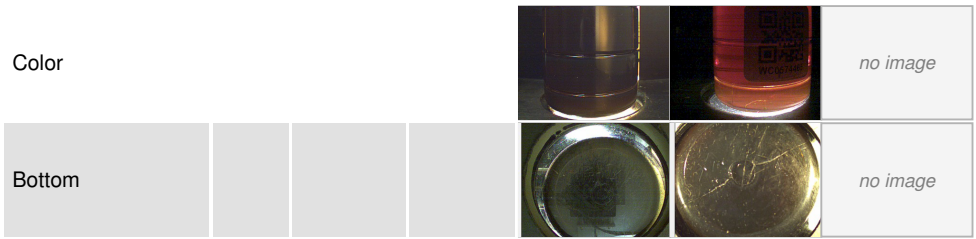

## GRAPHS

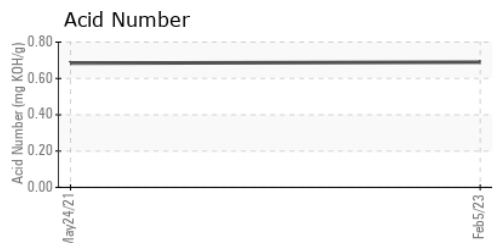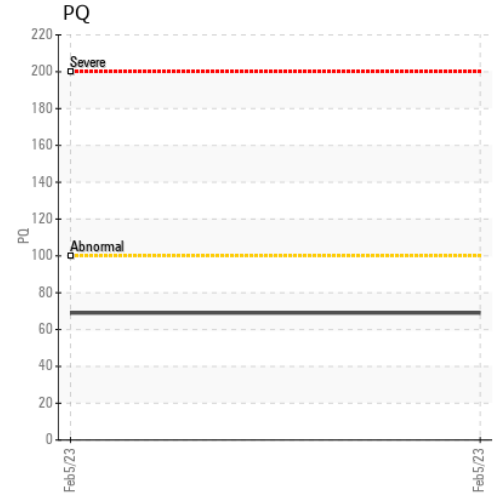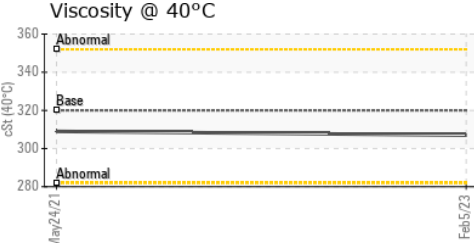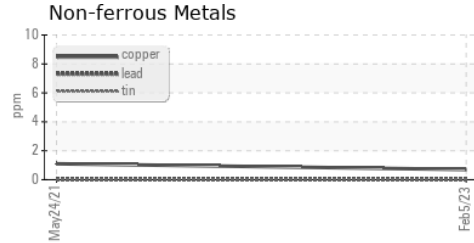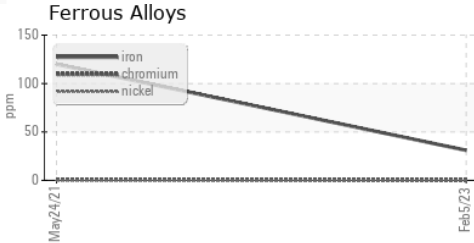

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0688505 **Received** : 06 Feb 2023  
**Lab Number** : 05759560 **Diagnosed** : 07 Feb 2023  
**Unique Number** : 10324167 **Diagnostician** : Wes Davis  
**Test Package** : PLANT

**NOKIAN TYRES US OPERATIONS LLC**  
 520 NOKIAN TYRES DRIVE  
 DAYTON, TN  
 US 37321  
 Contact: CHRIS NAPIER  
 christopher.napier@nokiantyres.com  
 T: (423)457-3121  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)