




PROBLEM SUMMARY


Area
BATCH SYSTEM 5
 Machine Id
BS5 HOMO
 Component
Hydraulic System
 Fluid
SCHAEFFER 68 (--- LTR)

Sample Rating Trend

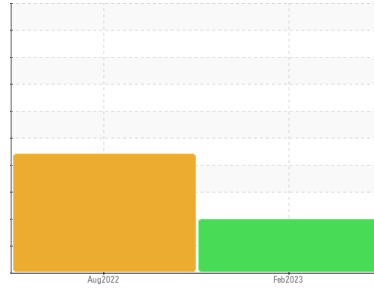

COMPONENT CONDITION SUMMARY

▲ Particle Trend

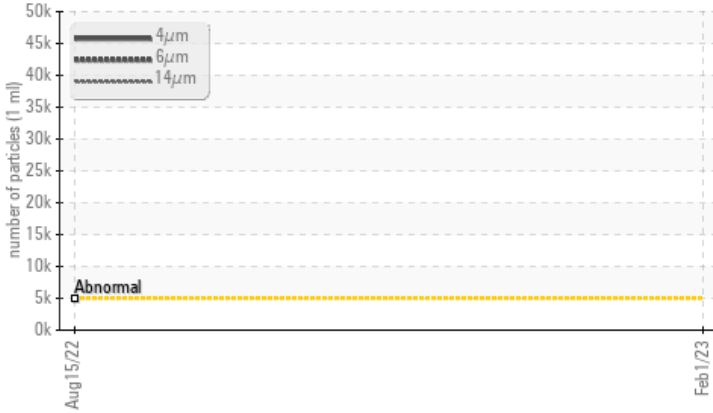

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ASTM D7647	ABNORMAL	ABNORMAL	---
Particles >4µm	ASTM D7647	>5000	▲ 49250	---	---
Particles >6µm	ASTM D7647	>1300	▲ 17813	---	---
Particles >14µm	ASTM D7647	>160	▲ 1376	---	---
Particles >21µm	ASTM D7647	>40	▲ 200	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 23/21/18	---	---

Customer Id: KRAMASIOW
 Sample No.: USP247608
 Lab Number: 05762091
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Other Action (see Note)	DONE	May 17 2023	?	No recommended actions

HISTORICAL DIAGNOSIS

15 Aug 2022 Diag: Jonathan Hester

WATER



We advise that you check for the source of water entry. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Appearance is hazy. Free water present. There is a moderate concentration of water present in the oil. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

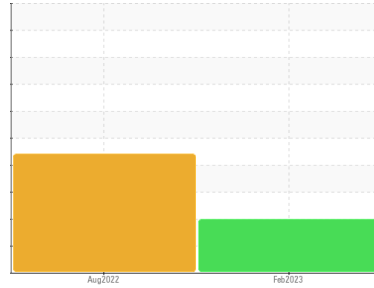

ISO



Area
BATCH SYSTEM 5
 Machine Id
BS5 HOMO
 Component
Hydraulic System
 Fluid
SCHAEFFER 68 (--- LTR)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	USP247608	USP232470	---
Sample Date	Client Info	01 Feb 2023	15 Aug 2022	---
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ABNORMAL	ABNORMAL	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	1	2
Chromium	ppm	ASTM D5185m >20	0	0
Nickel	ppm	ASTM D5185m >20	0	<1
Titanium	ppm	ASTM D5185m	0	0
Silver	ppm	ASTM D5185m	0	2
Aluminum	ppm	ASTM D5185m >20	0	2
Lead	ppm	ASTM D5185m >20	0	<1
Copper	ppm	ASTM D5185m >20	2	9
Tin	ppm	ASTM D5185m >20	0	<1
Vanadium	ppm	ASTM D5185m	0	0
Cadmium	ppm	ASTM D5185m	<1	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	7
Barium	ppm	ASTM D5185m	0	0
Molybdenum	ppm	ASTM D5185m	48	189
Manganese	ppm	ASTM D5185m	0	<1
Magnesium	ppm	ASTM D5185m	<1	1
Calcium	ppm	ASTM D5185m	39	16
Phosphorus	ppm	ASTM D5185m	382	585
Zinc	ppm	ASTM D5185m	462	585
Sulfur	ppm	ASTM D5185m	1010	2029

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	3	6
Sodium	ppm	ASTM D5185m	2	4
Potassium	ppm	ASTM D5185m >20	0	0
Water	%	ASTM D6304 >0.05	0.007	▲ 0.344
ppm Water	ppm	ASTM D6304 >500	78.4	▲ 3440






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 49250	---	---
Particles >6µm	ASTM D7647 >1300	▲ 17813	---	---
Particles >14µm	ASTM D7647 >160	▲ 1376	---	---
Particles >21µm	ASTM D7647 >40	▲ 200	---	---
Particles >38µm	ASTM D7647 >10	5	---	---
Particles >71µm	ASTM D7647 >3	0	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 23/21/18	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.53	1.15


OIL ANALYSIS REPORT

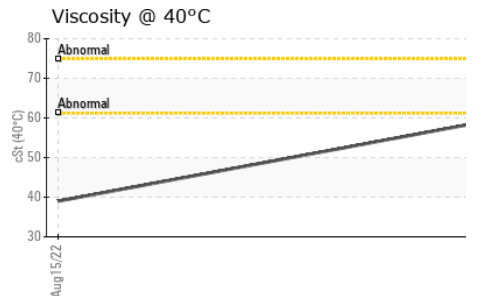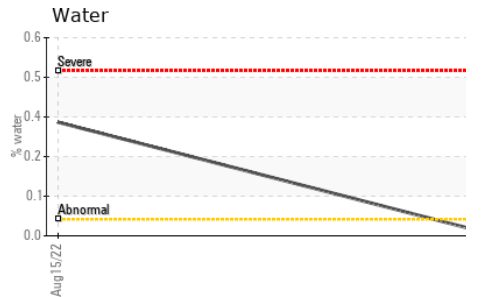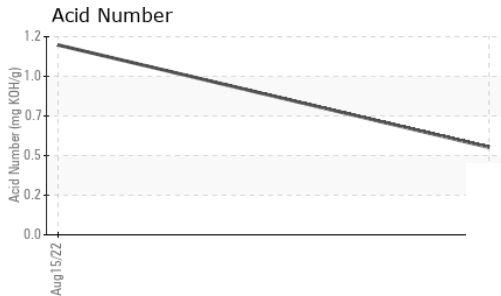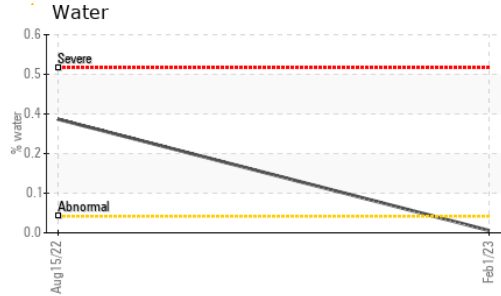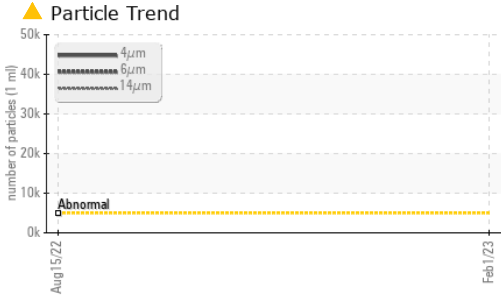






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	▲ MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	▲ HAZY	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%	---
Free Water	scalar	*Visual		NEG	▲ 1.0	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	59.3	39.0	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

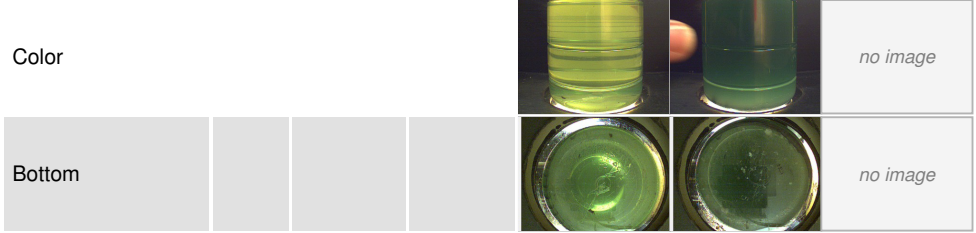

GRAPHS

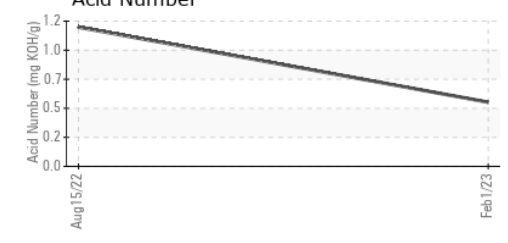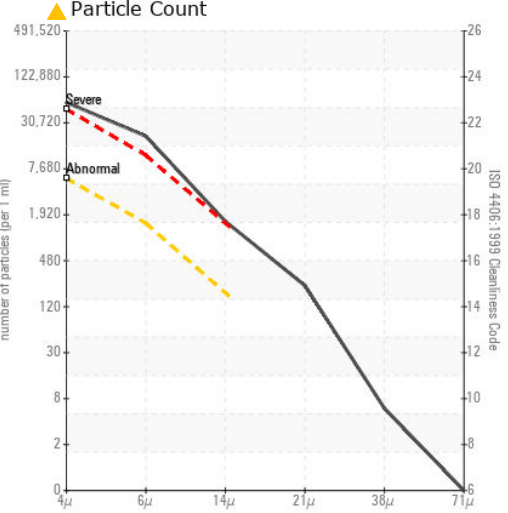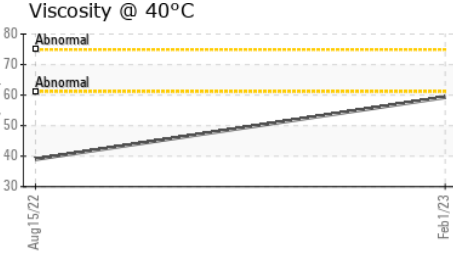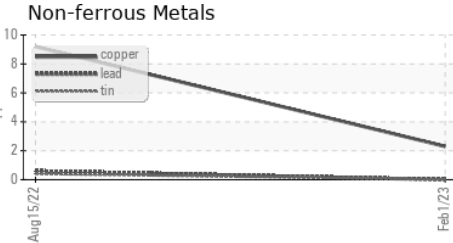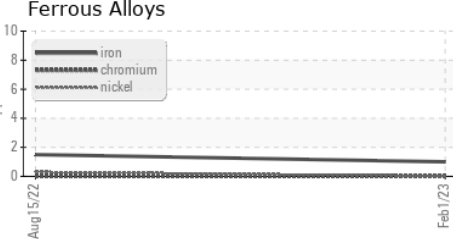

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USP247608 **Received** : 08 Feb 2023
Lab Number : **05762091** **Diagnosed** : 09 Feb 2023
Unique Number : 10331699 **Diagnostician** : Doug Bogart
Test Package : IND 2

KraftHeinz - Mason City - Plant 8360
 1022 12TH ST
 MASON CITY, IA
 US 50401
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)