

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER CSD 75 7893914 (S/N 1221)

Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- QTS)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC91005	KC95004	KC95862
Sample Date		Client Info		07 Feb 2023	24 Aug 2022	27 Dec 2021
Machine Age	hrs	Client Info		5494	4246	2306
Oil Age	hrs	Client Info		3100	1940	2306
Oil Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	10	8	10
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	le le	method	limit/base	current	history1	history2
Boron		ASTM D5185m	in in Dase	0	0	0
	ppm	ASTM D5185m	90	0		0
Barium	ppm		90	-	<1	
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m	90	1	0	0
Magnesium Calcium	ppm	ASTM D5185m ASTM D5185m		0	0	0
	ppm		2	-		
Phosphorus	ppm	ASTM D5185m		34 0	<1 0	0
Zinc	ppm	ASTM D5185m		U		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	0	0
Sodium	ppm	ASTM D5185m		0	0	1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304		0.004	0.010	0.006
ppm Water	ppm	ASTM D6304	>500	46.8	103.7	68.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		480	1911	5497
Particles >6µm		ASTM D7647		123	552	1571
Particles >14µm		ASTM D7647	>160	3	34	206
Particles >21µm		ASTM D7647		0	6	54
Particles >38µm		ASTM D7647		0	0	5
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/14	16/14/9	18/16/12	18/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.39	0.40	0.413




OIL ANALYSIS REPORT

12000 10000 - Severe			
10000 - 4	 	 	
8000			-i
6000 -			
4000-			į,
2000			
Abnormal	 	 	
12/2	ł/22 -		Feb7/23 -
Dec27	Aug24/22		Feb



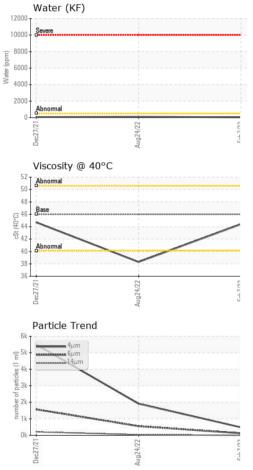

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.4	38.3	44.7
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						
Bottom						

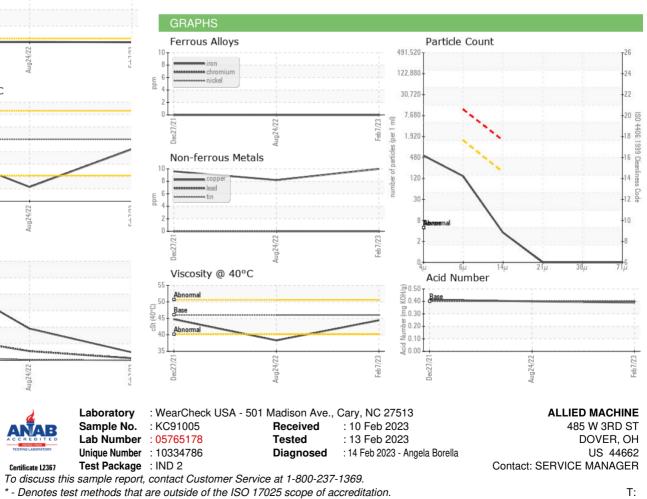

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: SERVICE MANAGER ? - ALLDOV

F:

Page 2 of 2