


PROBLEM SUMMARY

Sample Rating Trend



ADDITIVES

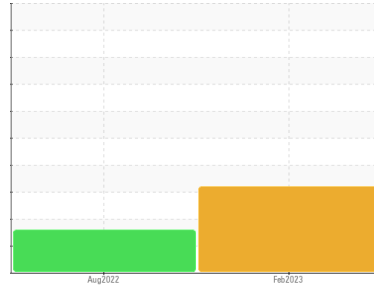


Machine Id
KAESER AS 30 8301641 (S/N 1882)

Component
Compressor


Fluid
KAESER SIGMA (OEM) FG-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

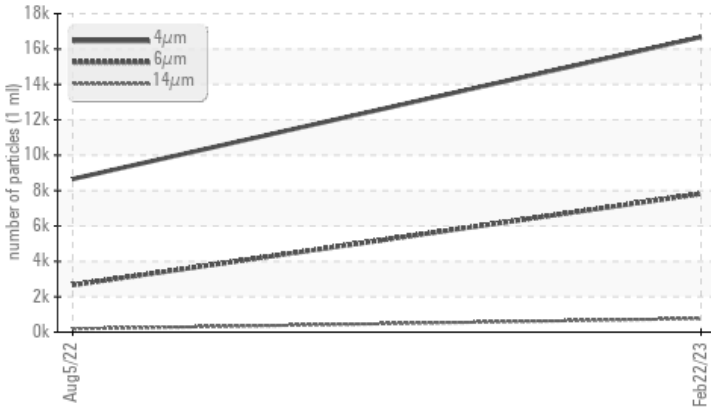

▲ Additives

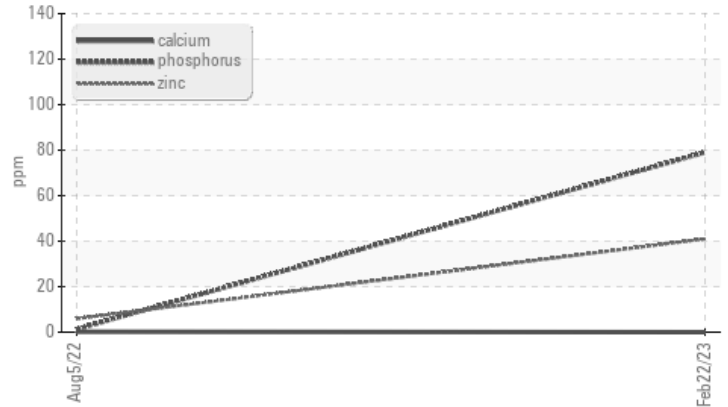

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	---
Phosphorus	ppm	ASTM D5185m	500	▲ 79	1	---
Zinc	ppm	ASTM D5185m		▲ 41	6	---
Sulfur	ppm	ASTM D5185m		▲ 5613	17421	---
Particles >6µm		ASTM D7647	>1300	▲ 7820	▲ 2660	---
Particles >14µm		ASTM D7647	>80	▲ 769	▲ 186	---
Particles >21µm		ASTM D7647	>20	▲ 121	▲ 28	---
Particles >38µm		ASTM D7647	>4	▲ 5	0	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ 21/20/17	▲ 20/19/15	---

Customer Id: MENEWDW
Sample No.: KCP46216
Lab Number: 05778188
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

05 Aug 2022 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

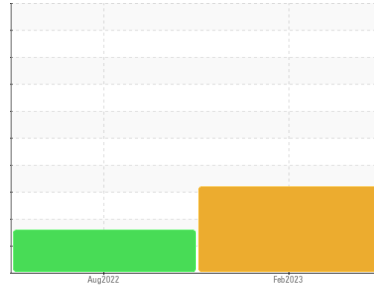

ADDITIVES



Machine Id
KAESER AS 30 8301641 (S/N 1882)

Component
Compressor
 Fluid
KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

▲ Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCP46216	KCP48220	---
Sample Date	Client Info		22 Feb 2023	05 Aug 2022	---
Machine Age	hrs	Client Info	8122	3636	---
Oil Age	hrs	Client Info	5000	3600	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	<1	---
Chromium	ppm	ASTM D5185m >10	0	0	---
Nickel	ppm	ASTM D5185m >3	0	<1	---
Titanium	ppm	ASTM D5185m >3	0	0	---
Silver	ppm	ASTM D5185m >2	0	<1	---
Aluminum	ppm	ASTM D5185m >10	3	1	---
Lead	ppm	ASTM D5185m >10	0	0	---
Copper	ppm	ASTM D5185m >50	2	7	---
Tin	ppm	ASTM D5185m >10	0	<1	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	---
Barium	ppm	ASTM D5185m	7	56	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	0	0	---
Magnesium	ppm	ASTM D5185m	2	43	---
Calcium	ppm	ASTM D5185m	0	<1	---
Phosphorus	ppm	ASTM D5185m 500	▲ 79	1	---
Zinc	ppm	ASTM D5185m	▲ 41	6	---
Sulfur	ppm	ASTM D5185m	▲ 5613	17421	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	4	---
Sodium	ppm	ASTM D5185m	0	17	---
Potassium	ppm	ASTM D5185m >20	<1	18	---
Water	%	ASTM D6304 >0.05	0.006	0.022	---
ppm Water	ppm	ASTM D6304 >500	63.5	223.3	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		16680	8654	---
Particles >6µm	ASTM D7647 >1300		▲ 7820	▲ 2660	---
Particles >14µm	ASTM D7647 >80		▲ 769	▲ 186	---
Particles >21µm	ASTM D7647 >20		▲ 121	▲ 28	---
Particles >38µm	ASTM D7647 >4		▲ 5	0	---
Particles >71µm	ASTM D7647 >3		0	0	---
Oil Cleanliness	ISO 4406 (c) >--/17/13		▲ 21/20/17	▲ 20/19/15	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.5	0.33	0.29	---


OIL ANALYSIS REPORT

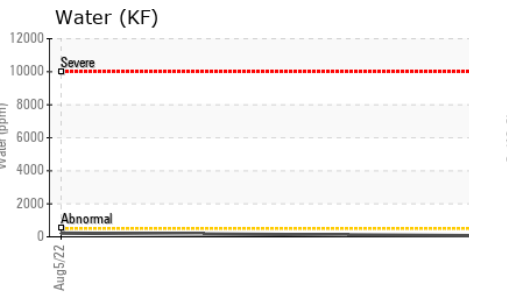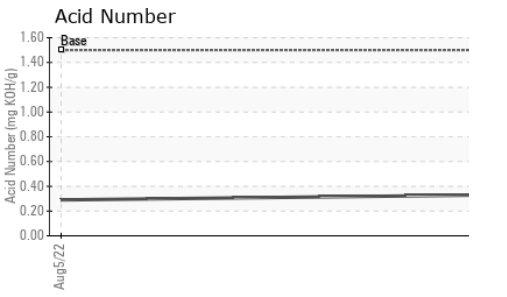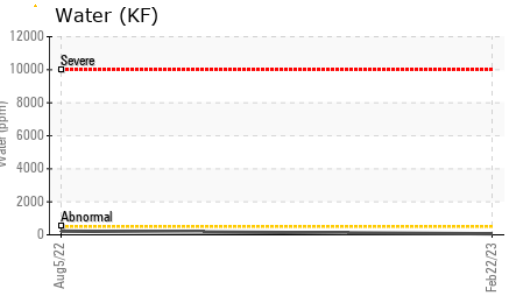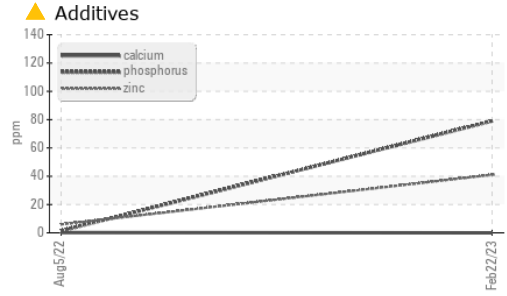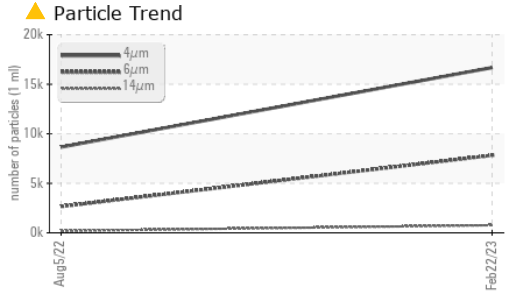






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	45.8	44.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

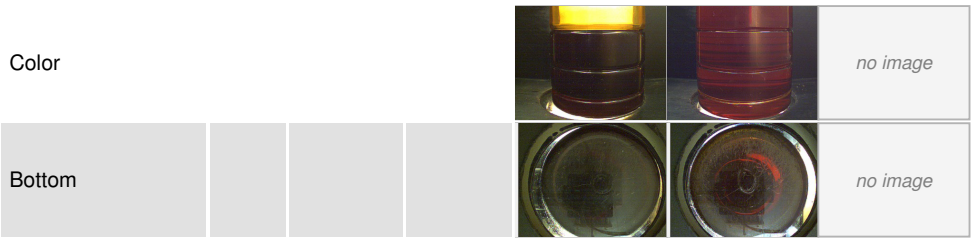

GRAPHS

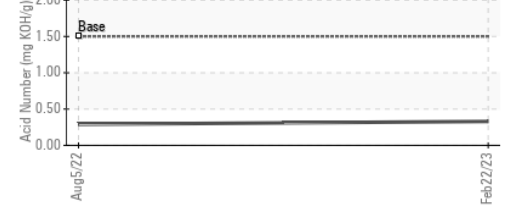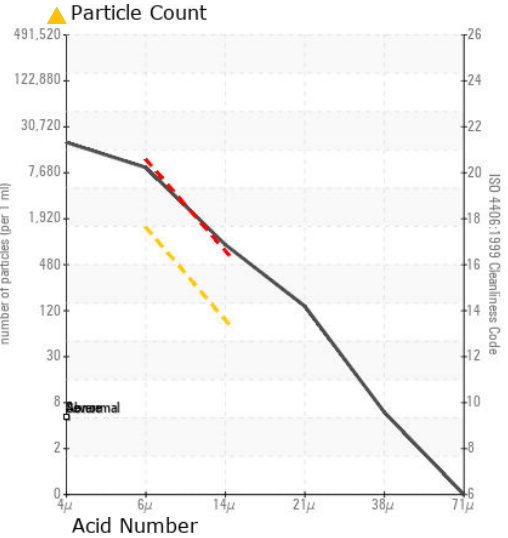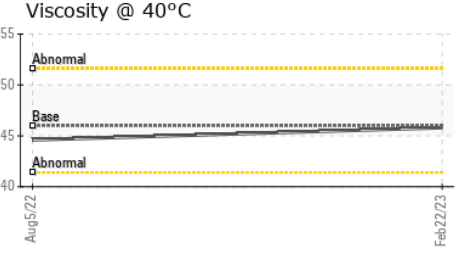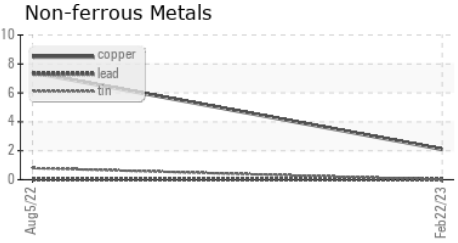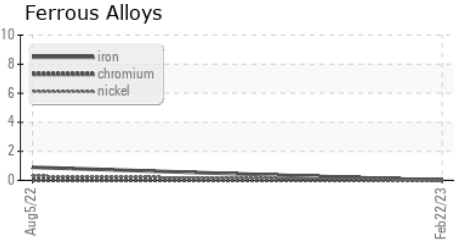

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCP46216 **Received** : 27 Feb 2023
Lab Number : 05778188 **Diagnosed** : 28 Feb 2023
Unique Number : 10357858 **Diagnostician** : Doug Bogart
Test Package : IND 2 (Additional Tests: KF, PrtCount)

MENASHA PACKAGING COMPANY
 9 GATEWAY COMMERCE CENTER DR E
 EDWARDSVILLE, IL
 US 62025
 Contact: A/P
 ssc.ap@menasha.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)