

## **OIL ANALYSIS REPORT**

Sample Rating Trend



DIRT



Machine Id GZJ00403 Component

**Biogas Engine** 

PETRO CANADA SENTRON CG 40 (--- GAL)

	une,	y2022 Jun20	22 Jul2022 Aug2022	Oct2022 Nov2022 Dec2022	Jan2023	
SAMPLE INFORM	<b>ATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0699081	WC0699085	WC0699080
Sample Date		Client Info		27 Feb 2023	21 Feb 2023	13 Feb 2023
Machine Age	hrs	Client Info		112546	112409	112217
Oil Age	hrs	Client Info		904	767	575
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>45	11	10	7
Chromium	ppm	ASTM D5185m	>2	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>10	3	2	<1
Lead	ppm	ASTM D5185m	>5	3	2	3
Copper	ppm	ASTM D5185m	>14	3	2	2
Tin	ppm	ASTM D5185m	>13	6	5	5
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1	0
Barium	ppm	ASTM D5185m	1	0	0	0
Molybdenum	ppm	ASTM D5185m	2	2	1	2
Manganese	ppm	ASTM D5185m	1	<1	<1	<1
Magnesium	ppm	ASTM D5185m	9	13	21	17
Calcium	ppm	ASTM D5185m	2712	2886	2958	2966
Phosphorus	ppm	ASTM D5185m	292	274	280	303
Zinc	ppm	ASTM D5185m	342	353	348	359
Sulfur	ppm	ASTM D5185m	2575	3876	3683	3638
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>200	<u> </u>	<b>4</b> 398	<b>A</b> 308
Sodium	ppm	ASTM D5185m		2	2	1
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Fuel	%	ASTM D3524	>4.0	0.3	0.3	0.3
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	5.4	5.2	4.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	19.9	18.5
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.6	10.7	9.7
Acid Number (AN)	mg KOH/g	ASTM D8045	0.98	1.18	0.99	1.01
Base Number (BN)	mg KOH/g	ASTM D2896	8.1	7.08	6.82	6.99

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: Total oil added 53 gal )

Fluic

#### Wear

All component wear rates are normal.

#### Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal.

#### Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


Submitted By: Blain Middleton





# **OIL ANALYSIS REPORT**


VISUAL










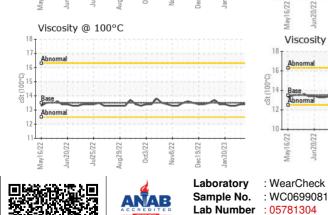


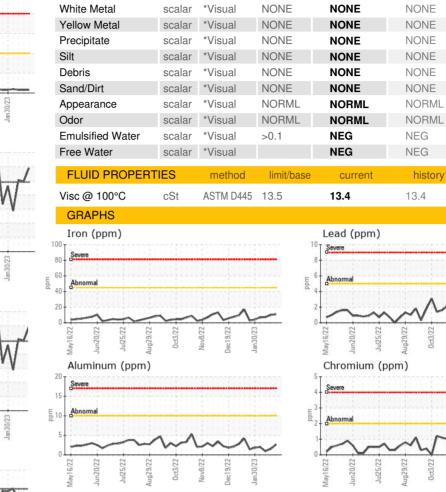


method

limit/base

current



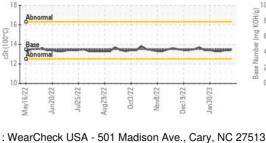

Received


Diagnosed

Tested

: 02 Mar 2023

: 03 Mar 2023

: 03 Mar 2023 - Jonathan Hester

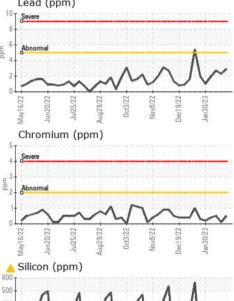

history1

history2

NONE

NONE

NONE

NONE

NONE

NONE

NORML


NORML

history2


NEG

NEG

13.3



### Base Number



FINLEY BIOENERGY 74265 Bombing Range Road Boardman, OR US 97818 Contact: Blain Middleton bmiddleton@archaea.energy T: (541)481-3232 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Unique Number : 10360974

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

Certificate L2367