




# OIL ANALYSIS REPORT

Sample Rating Trend

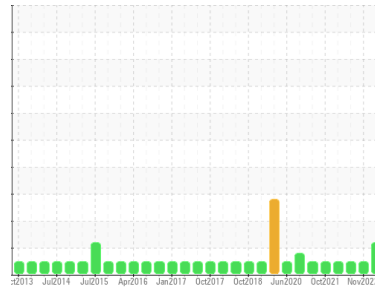

ISO



Machine Id  
**PETERBILT 27227**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (11 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KLM2339287</b>	KLM2339417	KL0008558
Sample Date	Client Info		<b>10 Feb 2023</b>	04 Nov 2022	30 Jun 2022
Machine Age	mls	Client Info	<b>79280</b>	78865	26112
Oil Age	mls	Client Info	<b>19368</b>	18953	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>78</b>	87	24
Chromium	ppm	ASTM D5185m >4	<b>3</b>	3	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>11</b>	11	5
Lead	ppm	ASTM D5185m >45	<b>17</b>	19	<1
Copper	ppm	ASTM D5185m >85	<b>24</b>	27	7
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 151	<b>53</b>	12	12
Barium	ppm	ASTM D5185m 0.4	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 250	<b>29</b>	20	8
Manganese	ppm	ASTM D5185m	<b>3</b>	2	<1
Magnesium	ppm	ASTM D5185m 0	<b>324</b>	313	143
Calcium	ppm	ASTM D5185m 2046	<b>1835</b>	2015	2191
Phosphorus	ppm	ASTM D5185m 1043	<b>860</b>	883	898
Zinc	ppm	ASTM D5185m 943	<b>1153</b>	1129	1081
Sulfur	ppm	ASTM D5185m 5012	<b>3430</b>	3545	4239

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>12</b>	12	5
Sodium	ppm	ASTM D5185m	<b>13</b>	13	3
Potassium	ppm	ASTM D5185m >20	<b>11</b>	10	9


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.8</b>	2.2	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.7</b>	14.5	9.1
Sulfation	Abs./1mm	*ASTM D7415 >30	<b>32.7</b>	38.0	22.6




# OIL ANALYSIS REPORT


▲ Particle Trend

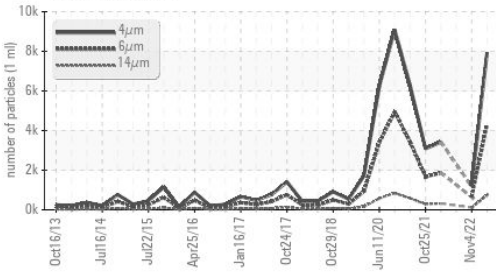


▲ Particle Trend

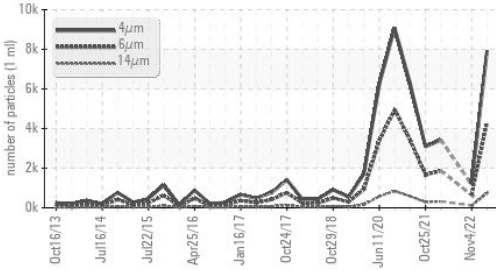

Base Number

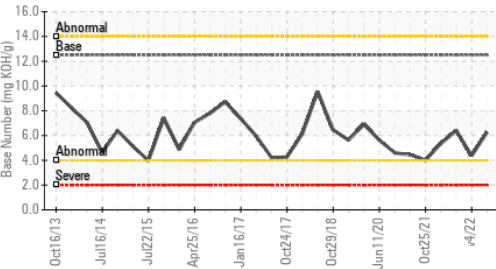

Viscosity @ 100°C

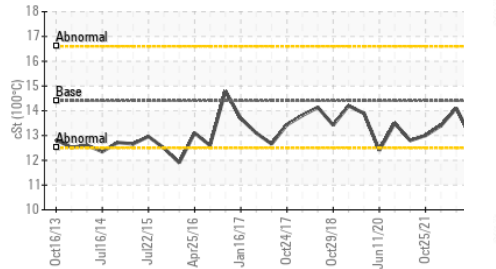

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>7934</b>	1179	---
Particles >6µm	ASTM D7647	>5000	<b>4322</b>	642	---
Particles >14µm	ASTM D7647	>640	<b>▲ 736</b>	109	---
Particles >21µm	ASTM D7647	>160	<b>▲ 248</b>	37	---
Particles >38µm	ASTM D7647	>40	<b>38</b>	6	---
Particles >71µm	ASTM D7647	>10	<b>4</b>	1	---
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>▲ 19/17</b>	17/14	---


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	<b>30.2</b>	35.7	17.8
Base Number (BN)	mg KOH/g ASTM D2896	12.5	<b>6.26</b>	4.37	6.4

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	14.4	<b>14.3</b>	12.9	14.1

GRAPHS


Ferrous Alloys

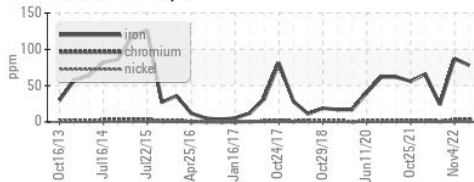


Non-ferrous Metals

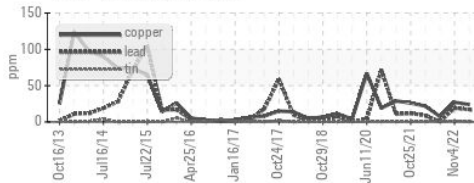


Viscosity @ 100°C

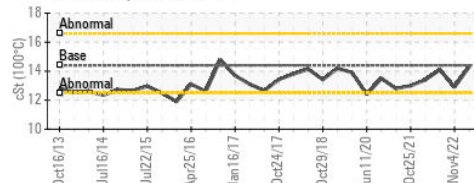

▲ Particle Count

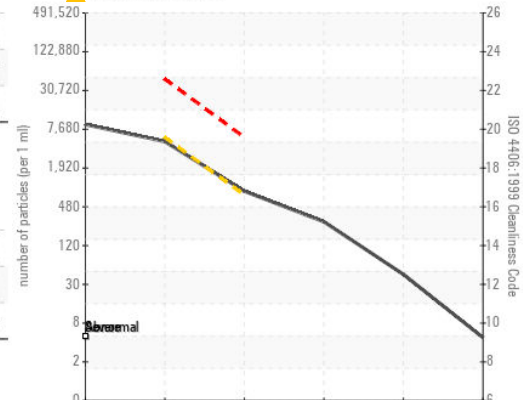

Base Number

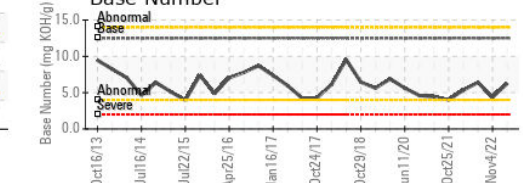

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KLM2339287 **Received** : 02 Mar 2023  
**Lab Number** : **05782042** **Diagnosed** : 06 Mar 2023  
**Unique Number** : 10361712 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**CITY & COUNTY HONOLULU**  
 99-999 IWAENA RD  
 AIEA, HI  
 US 96701  
 Contact: CLYDE OMIJA  
 comija@honolulu.gov  
 T: (575)623-9952  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)