

OIL ANALYSIS REPORT

Sample Rating Trend





Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		00	12021	Jun2022 Feb20		
SAMPLE INFORM	/IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP54745	KCP49574	KCP35671
Sample Date		Client Info		22 Feb 2023	22 Jun 2022	08 Jul 2021
Machine Age	hrs	Client Info		94997	0	82217
Oil Age	hrs	Client Info		4500	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	<1	<1	0
Aluminum	ppm	ASTM D5185m		<1	0	0
Lead	ppm	ASTM D5185m	>10	0	0	<1
			>50	5	6	6
Copper Tin	ppm	ASTM D5185m	>50 >10	0	0	0
	ppm		>10	-		
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	2	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	100	<1	<1	0
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	3	6	4
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	23500	18193	17504	16320
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	0	2
Sodium	ppm	ASTM D5185m		<1	<1	0
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.05	0.009	0.008	0.008
ppm Water	ppm	ASTM D6304	>500	96.0	87.2	87.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1792	3350	1658
Particles >6µm		ASTM D7647	>1300	386	664	548
Particles >14µm		ASTM D7647		33	48	68
Particles >21µm		ASTM D7647		11	14	21
Particles >38µm		ASTM D7647	>4	0	1	2
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/12	19/17/13	16/13
		method	limit/base	current	history1	history2
						10510197
FLUID DEGRADA						
Acid Number (AN) 04:42) Rev: 1	mg KOH/g	ASTM D8045	1.0	0.49	0.54 ct/Location: EDV	0.540


Report Id: XILSAN [WUSCAR] 05784545 (Generated: 09/15/2023 08:04:42) Rev: 1


Page 1 of 2



OIL ANALYSIS REPORT





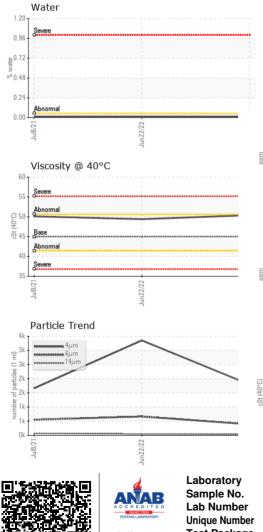

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	50.4	49.4	50.1
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						
Bottom						

