




OIL ANALYSIS REPORT

Sample Rating Trend

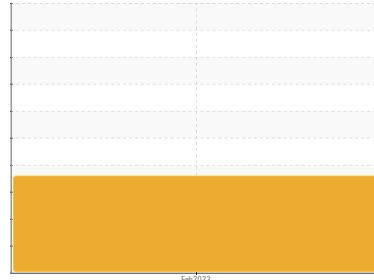

Machine Id
JCB 4CX 3140718
 Component
Diesel Engine
 Fluid
JCB 5W40 (4 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

Wear

Moderate concentration of visible metal present. All component wear rates are normal.

Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	JCB004486	---	---
Sample Date	Client Info	24 Feb 2023	---	---
Machine Age	hrs	Client Info	8	---
Oil Age	hrs	Client Info	8	---
Oil Changed	Client Info	Not Chngd	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---
Glycol	WC Method		NEG	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>125	13	---
Chromium	ppm	ASTM D5185m	>5	0	---
Nickel	ppm	ASTM D5185m	>4	0	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m	>3	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	---
Lead	ppm	ASTM D5185m	>15	<1	---
Copper	ppm	ASTM D5185m	>125	12	---
Tin	ppm	ASTM D5185m	>4	0	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	---
Barium	ppm	ASTM D5185m		<1	---
Molybdenum	ppm	ASTM D5185m		0	---
Manganese	ppm	ASTM D5185m		3	---
Magnesium	ppm	ASTM D5185m		10	---
Calcium	ppm	ASTM D5185m		2141	---
Phosphorus	ppm	ASTM D5185m		862	---
Zinc	ppm	ASTM D5185m		1017	---
Sulfur	ppm	ASTM D5185m		3511	---

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	▲ 60	---
Sodium	ppm	ASTM D5185m		2	---
Potassium	ppm	ASTM D5185m	>20	1	---
Fuel	%	ASTM D3524	>5	0.8	---

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	9.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.5	---


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.2	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.5	---



OIL ANALYSIS REPORT


▲ Viscosity @ 40°C

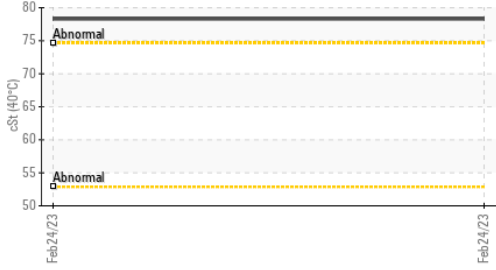


Fuel Dilution



▲ Viscosity @ 40°C

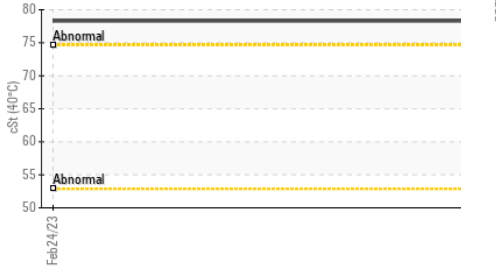

Fuel Dilution

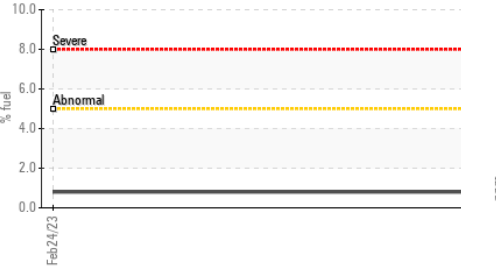

Base Number



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	▲ MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	▲ 78.3	---	---
Visc @ 100°C	cSt	ASTM D445	▲ 11.5	---	---
Viscosity Index (VI)	Scale	ASTM D2270	138	---	---

GRAPHS

Iron (ppm)




Lead (ppm)

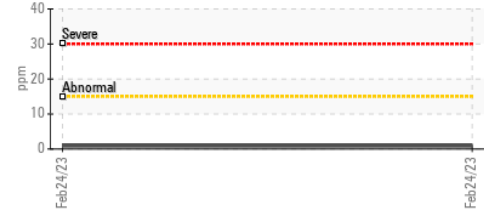


Aluminum (ppm)




Chromium (ppm)

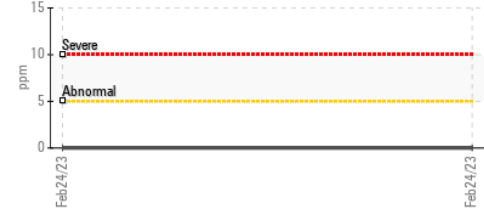

Copper (ppm)

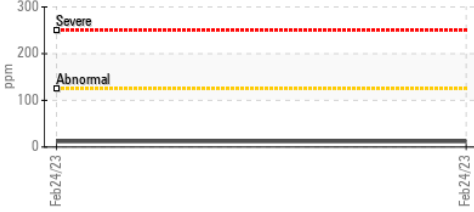


▲ Silicon (ppm)

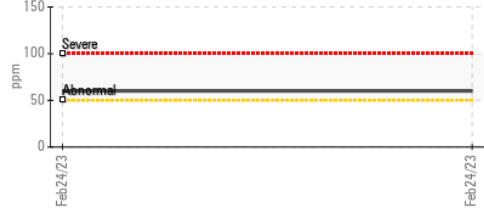

▲ Viscosity @ 100°C



Base Number

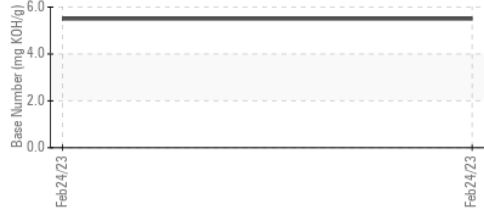

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JCB004486 **Recieved** : 07 Mar 2023
Lab Number : 05784872 **Diagnosed** : 09 Mar 2023
Unique Number : 10364542 **Diagnostician** : Jonathan Hester
Test Package : MOB 1 (Additional Tests: FuelDilution, KV40, PercentFuel, TBN, VI)

JCB OF SOUTHERN CALIFORNIA - FONTANA
 8089 CHERRY AVENUE
 FONTANA, CA
 US 92336
 Contact: Carlos Gonzalez
 carlos.gonzalez@socaljcb.com
 T: (909)202-1293
 F: (909)428-9620

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)