




PROBLEM SUMMARY


Machine Id
TS03-07
 Component
Hydraulic System
 Fluid
NOT GIVEN (--- GAL)

Sample Rating Trend

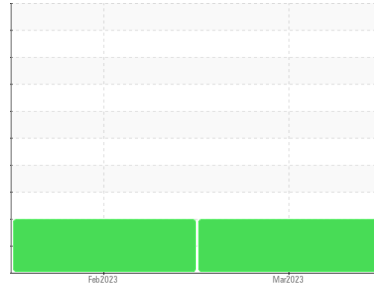


COMPONENT CONDITION SUMMARY

▲ Non-ferrous Metals

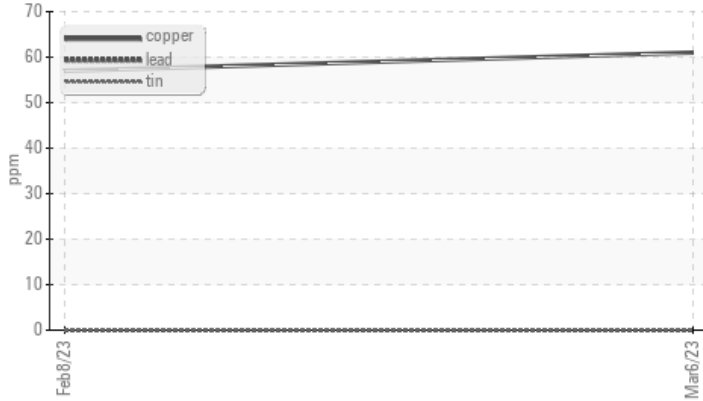

▲ Particle Trend

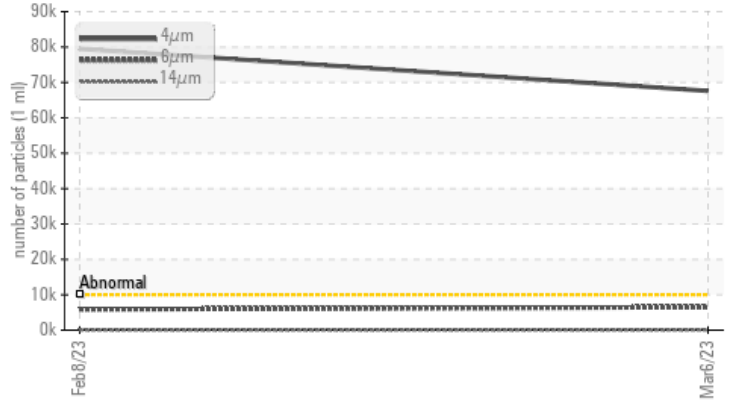

RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	---
Copper	ppm	ASTM D5185m	>20	▲ 61	▲ 57	---
Particles >4µm		ASTM D7647	>10000	▲ 67603	▲ 79494	---
Particles >6µm		ASTM D7647	>2500	▲ 6504	▲ 5879	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	▲ 23/20/12	▲ 23/20/12	---
PrtFilter				no image	no image	no image

Customer Id: PARLITGA
 Sample No.: PH0000365
 Lab Number: 05787330
 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	MISSED	Jun 29 2023	?	We recommend you service the filters on this component if applicable.

HISTORICAL DIAGNOSIS

08 Feb 2023 Diag: Doug Bogart

WEAR



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. The copper level is abnormal. All other component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

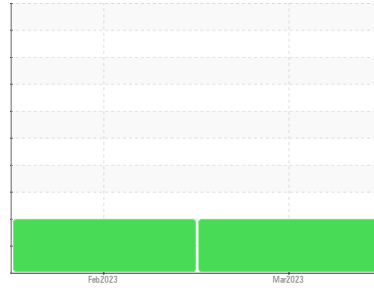

WEAR



Machine Id
TS03-07
 Component
Hydraulic System
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

▲ Wear

The copper level is abnormal. All other component wear rates are normal.

▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PH0000365	PH05764532	---
Sample Date	Client Info		06 Mar 2023	08 Feb 2023	---
Machine Age	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<1	<1	---
Chromium	ppm	ASTM D5185m >20	0	0	---
Nickel	ppm	ASTM D5185m >20	0	0	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >20	0	0	---
Lead	ppm	ASTM D5185m >20	0	0	---
Copper	ppm	ASTM D5185m >20	▲ 61	▲ 57	---
Tin	ppm	ASTM D5185m >20	0	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m	<1	0	---
Calcium	ppm	ASTM D5185m	17	13	---
Phosphorus	ppm	ASTM D5185m	437	408	---
Zinc	ppm	ASTM D5185m	590	583	---
Sulfur	ppm	ASTM D5185m	1385	1144	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	6	5	---
Sodium	ppm	ASTM D5185m	2	2	---
Potassium	ppm	ASTM D5185m >20	2	0	---
Water	%	ASTM D6304 >0.05	NEG	NEG	---

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 67603	▲ 79494	---
Particles >6µm	ASTM D7647	>2500	▲ 6504	▲ 5879	---
Particles >14µm	ASTM D7647	>320	37	23	---
Particles >21µm	ASTM D7647	>80	3	2	---
Particles >38µm	ASTM D7647	>20	0	0	---
Particles >71µm	ASTM D7647	>4	0	0	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 23/20/12	▲ 23/20/12	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.55	0.55	---



OIL ANALYSIS REPORT

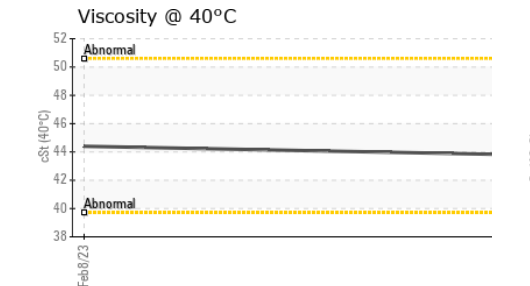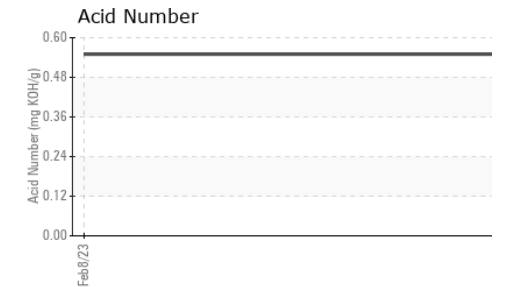
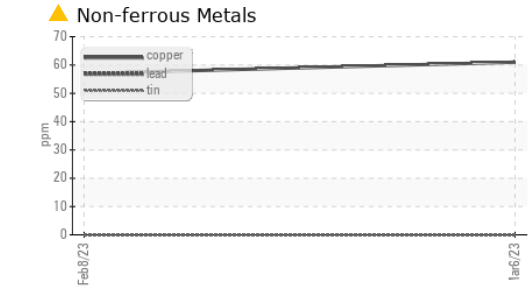
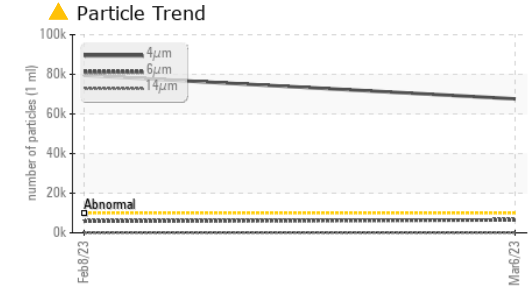
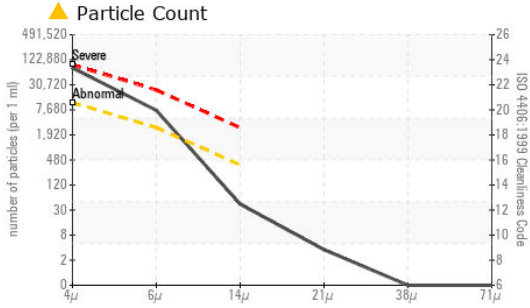


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	43.8	44.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					no image
Bottom					no image
PrtFilter					no image

GRAPHS

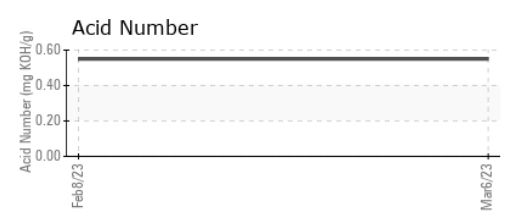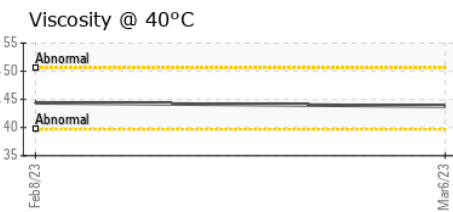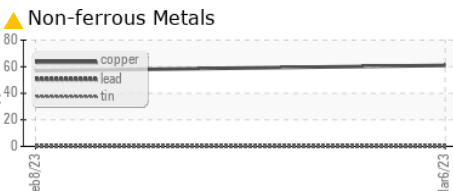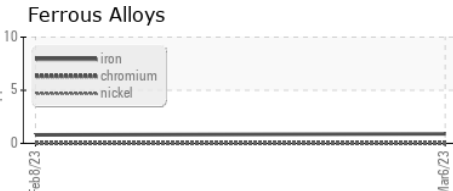

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PH0000365 **Recieved** : 09 Mar 2023
Lab Number : 05787330 **Diagnosed** : 11 Mar 2023
Unique Number : 10372001 **Diagnostician** : Don Baldrige
Test Package : PLANT (Additional Tests: KF)

PARKER HANNIFIN CORPORATION
 1300 SIX FLAGS RD
 LITHIA SPRINGS, GA
 US 30122
 Contact: PAT CHRUSCIEL
 pchrusciel@parker.com
 T: (770)819-3442
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)