



# OIL ANALYSIS REPORT

Sample Rating Trend


GLYCOL



Machine Id  
**JOHN DEERE JD350C - HERTZLER BROS**

Component  
**Diesel Engine**

Fluid  
**ALPHA 5W40 MEGA MOLY PREMIUM (--- QTS)**

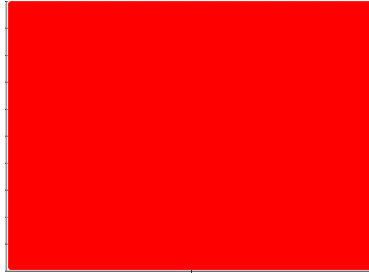

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

### Wear

Cylinder, crank, or cam shaft wear is indicated. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core).

### Contamination

Sodium and/or potassium levels are high. Test for glycol is positive. Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>WC0610137</b>   | ---      | ---      |
| Sample Date   | Client Info |             | <b>09 Mar 2023</b> | ---      | ---      |
| Machine Age   | hrs         | Client Info | <b>4850</b>        | ---      | ---      |
| Oil Age       | hrs         | Client Info | <b>10</b>          | ---      | ---      |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | ---      | ---      |
| Sample Status |             |             | <b>SEVERE</b>      | ---      | ---      |

## CONTAMINATION

|      | method    | limit/base | current        | history1 | history2 |
|------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >5         | <b>&lt;1.0</b> | ---      | ---      |

## WEAR METALS

|          | method | limit/base  | current | history1     | history2 |
|----------|--------|-------------|---------|--------------|----------|
| Iron     | ppm    | ASTM D5185m | >51     | <b>▲ 77</b>  | ---      |
| Chromium | ppm    | ASTM D5185m | >11     | <b>2</b>     | ---      |
| Nickel   | ppm    | ASTM D5185m | >5      | <b>0</b>     | ---      |
| Titanium | ppm    | ASTM D5185m |         | <b>&lt;1</b> | ---      |
| Silver   | ppm    | ASTM D5185m | >3      | <b>0</b>     | ---      |
| Aluminum | ppm    | ASTM D5185m | >31     | <b>3</b>     | ---      |
| Lead     | ppm    | ASTM D5185m | >26     | <b>6</b>     | ---      |
| Copper   | ppm    | ASTM D5185m | >26     | <b>▲ 34</b>  | ---      |
| Tin      | ppm    | ASTM D5185m | >4      | <b>&lt;1</b> | ---      |
| Vanadium | ppm    | ASTM D5185m |         | <b>0</b>     | ---      |
| Cadmium  | ppm    | ASTM D5185m |         | <b>0</b>     | ---      |

## ADDITIVES

|            | method | limit/base  | current | history1    | history2 |
|------------|--------|-------------|---------|-------------|----------|
| Boron      | ppm    | ASTM D5185m |         | <b>31</b>   | ---      |
| Barium     | ppm    | ASTM D5185m |         | <b>0</b>    | ---      |
| Molybdenum | ppm    | ASTM D5185m |         | <b>31</b>   | ---      |
| Manganese  | ppm    | ASTM D5185m |         | <b>1</b>    | ---      |
| Magnesium  | ppm    | ASTM D5185m |         | <b>31</b>   | ---      |
| Calcium    | ppm    | ASTM D5185m |         | <b>2055</b> | ---      |
| Phosphorus | ppm    | ASTM D5185m |         | <b>928</b>  | ---      |
| Zinc       | ppm    | ASTM D5185m |         | <b>1223</b> | ---      |
| Sulfur     | ppm    | ASTM D5185m |         | <b>4094</b> | ---      |

## CONTAMINANTS

|           | method | limit/base  | current | history1      | history2 |
|-----------|--------|-------------|---------|---------------|----------|
| Silicon   | ppm    | ASTM D5185m | >22     | <b>▲ 24</b>   | ---      |
| Sodium    | ppm    | ASTM D5185m | >31     | <b>38</b>     | ---      |
| Potassium | ppm    | ASTM D5185m | >20     | <b>▲ 173</b>  | ---      |
| Glycol    | %      | *ASTM D2982 |         | <b>● 0.10</b> | ---      |

## INFRA-RED

|           | method   | limit/base  | current | history1    | history2 |
|-----------|----------|-------------|---------|-------------|----------|
| Soot %    | %        | *ASTM D7844 | >3      | <b>0.1</b>  | ---      |
| Nitration | Abs/cm   | *ASTM D7624 | >20     | <b>5.8</b>  | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30     | <b>14.8</b> | ---      |


## FLUID DEGRADATION

|                  | method   | limit/base  | current | history1    | history2 |
|------------------|----------|-------------|---------|-------------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25     | <b>9.0</b>  | ---      |
| Acid Number (AN) | mg KOH/g | ASTM D8045  |         | <b>0.91</b> | ---      |
| Base Number (BN) | mg KOH/g | ASTM D2896  |         | <b>9.58</b> | ---      |




# OIL ANALYSIS REPORT

### Glycol Contamination

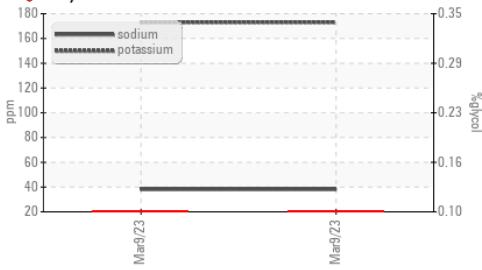

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.21   | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |


### Non-ferrous Metals

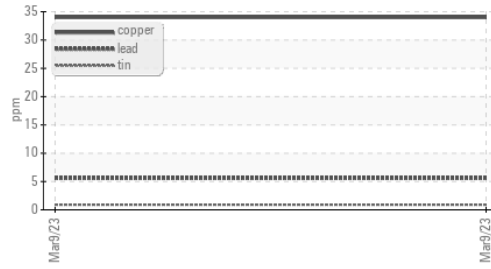

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 13.9    | ---      | ---      |

### GRAPHS

### Ferrous Alloys

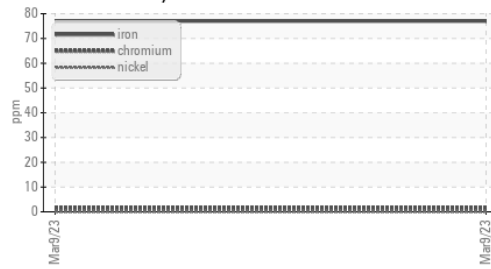


### Iron (ppm)




### Lead (ppm)




### Aluminum (ppm)

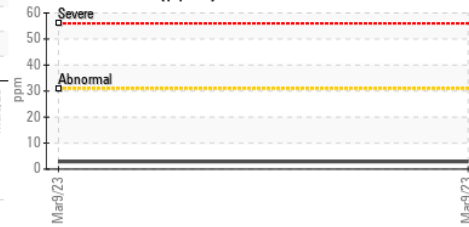


### Chromium (ppm)

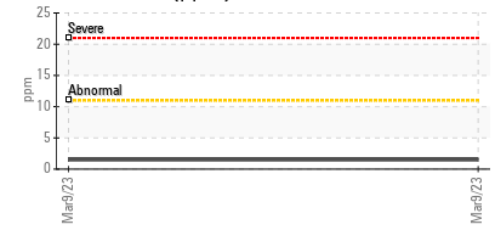


### Acid Number

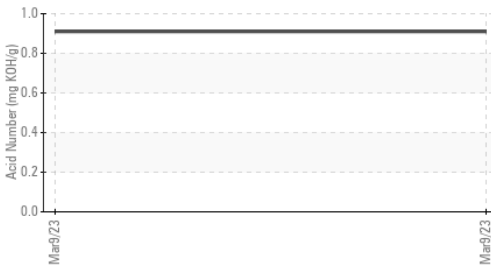


### Copper (ppm)

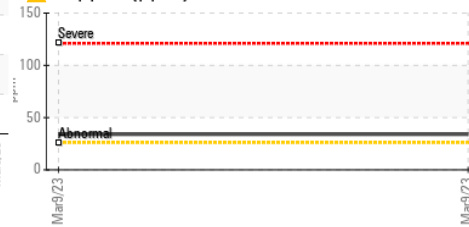


### Silicon (ppm)

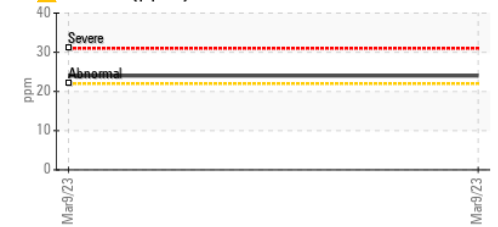

### Acid Number

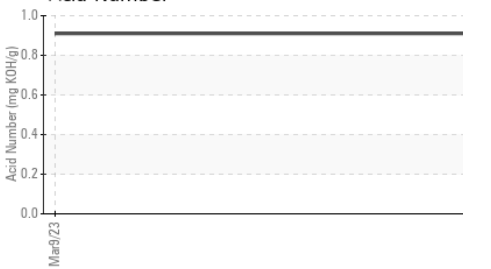

### Viscosity @ 100°C

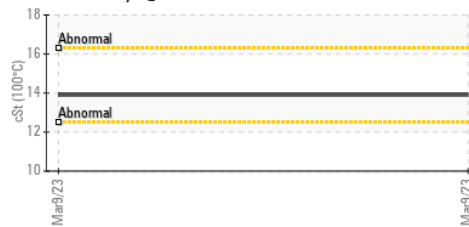

### Base Number



Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0610137 **Received** : 16 Mar 2023  
**Lab Number** : 05794200 **Diagnosed** : 21 Mar 2023  
**Unique Number** : 10383884 **Diagnostician** : Doug Bogart  
**Test Package** : MOB 2 ( Additional Tests: Glycol )

**POWER SYSTEMS & SUPPLY**  
 10381 S 800 W  
 WAVELAND, IN  
 US 47989  
 Contact: MELVIN KING  
 PSS5070@YAHOO.COM  
 T: (765)435-3733  
 F: (765)344-1749

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)