

OIL ANALYSIS REPORT

Area Red Bluff Plant/Cryogenic/Compressor **FRICK C-162**

Rotary Compressor Fluid TULCO LUBSOIL SYN RL WI 100 (250 GAL)

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

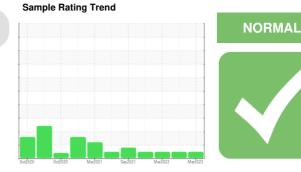


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO90002292	TO9012035	TO90000697
Sample Date		Client Info		14 Mar 2023	28 Apr 2022	08 Mar 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>70	2	1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>3	1	0	<1
Lead	ppm	ASTM D5185m	>4	0	<1	0
Copper	ppm	ASTM D5185m	>20	0	0	0
Tin	ppm	ASTM D5185m	>3	<1	<1	<1
Antimony	ppm	ASTM D5185m	20			0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium		ASTM D5185m		0	0	0
	ppm		1			
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	2	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		1	<1	0
Calcium	ppm	ASTM D5185m		4	42	<1
Phosphorus	ppm	ASTM D5185m	1500	1179	1144	742
Zinc	ppm	ASTM D5185m		8	15	2
Sulfur	ppm	ASTM D5185m		16	100	17
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>45	<1	1	0
Sodium	ppm	ASTM D5185m		1	1	<1
Potassium	ppm	ASTM D5185m	>20	1	<1	0
Water	%	ASTM D6304	>2.26	0.00	0.090	0.008
ppm Water	ppm	ASTM D6304	>22600	0.00	902.5	83.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	1090	486	574
Particles >6µm		ASTM D7647	>320	250	95	175
Particles >14µm		ASTM D7647	>80	21	10	19
Particles >21µm		ASTM D7647	>20	7	3	7
Particles >38µm		ASTM D7647	>4	1	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>18/15/13	17/15/12	16/14/10	16/15/11
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.04	0.028	0.044	0.59


Report Id: ENEORL [WUSCAR] 05797421 (Generated: 05/22/2024 13:26:16) Rev: 1


Submitted By: ERIC THORNTON



OIL ANALYSIS REPORT

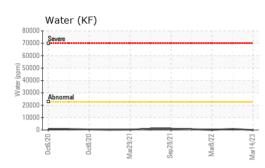


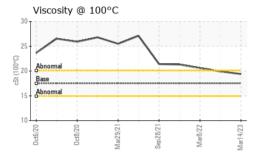



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2.26	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	97	110	113	114
Visc @ 100°C	cSt	ASTM D445	17.5	19.4	19.9	20.6
Viscosity Index (VI)	Scale	ASTM D2270	198	199	200	206
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					C C	
				1000		

Bottom

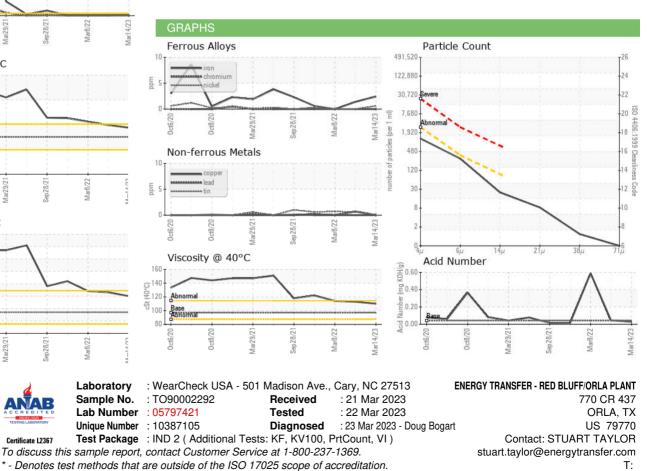

\$7 Certificate 12367

Base

10.

160 150

140

() 130 () 120 () 120 () 120 () 120 () 120 () 120 () 130

100 Bas

90 Abnormal

80

0ct6/20

Ab

Dct6/20

Abnormal 15

Viscosity @ 40°C

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ENEORL [WUSCAR] 05797421 (Generated: 05/22/2024 13:26:16) Rev: 1

Sep 28/21

en 28/21

Mar29/2

Mar29/2

Submitted By: ERIC THORNTON Page 2 of 2

F: