

PROBLEM SUMMARY

Sample Rating Trend

WEAR




KMGP UNIT 1

Component

Outboard Bearing

ROYAL PURPLE SYNFILM GT 32 (--- GAL)

COMPONENT CONDITION SUMMARY

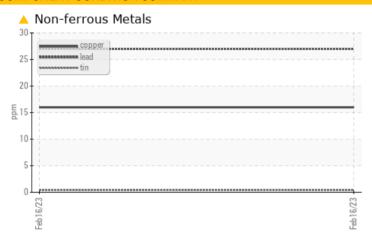

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status				ABNORMAL					
Lead	ppm	ASTM D5185m	>20	<u>^</u> 27					

Customer Id: MAGHOU Sample No.: RP0028255 Lab Number: 05797612 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



KMGP UNIT 1

Outboard Bearing

ROYAL PURPLE SYNFILM GT 32 (--- GAL)

DIAGNOSIS

Recommendation


Contamination

Fluid Condition

ROYAL PURPLE SYNFILM GT 32 (GAI		Feb.2023					
DIAGNOSIS	SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Recommendation	Sample Number		Client Info		RP0028255		
lo corrective action is recommended at this time.	Sample Date		Client Info		16 Feb 2023		
lesample at the next service interval to monitor.	Machine Age	hrs	Client Info		0		
Wear	Oil Age	hrs	Client Info		0		
he lead level is abnormal. All other component	Oil Changed		Client Info		N/A		
rear rates are normal.	Sample Status				ABNORMAL		
contamination There is no indication of any contamination in the	WEAR METALS		method	limit/base	current	history1	history2
il.	Iron	ppm	ASTM D5185m	>20	0		
uid Condition	Chromium	ppm	ASTM D5185m	>20	0		
he AN level is acceptable for this fluid. The	Nickel	ppm	ASTM D5185m	>20	0		
ondition of the oil is suitable for further service.	Titanium	ppm	ASTM D5185m		<1		
	Silver	ppm	ASTM D5185m		0		
	Aluminum	ppm	ASTM D5185m	>20	<1		
	Lead	ppm	ASTM D5185m	>20	27		
	Copper	ppm	ASTM D5185m	>20	16		
	Tin	ppm	ASTM D5185m	>20	<1		
	Vanadium	ppm	ASTM D5185m		<1		
	Cadmium	ppm	ASTM D5185m		0		
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		0		
	Barium	ppm	ASTM D5185m		0		
	Molybdenum	ppm	ASTM D5185m		<1		
	Manganese	ppm	ASTM D5185m		<1		
	Magnesium	ppm	ASTM D5185m		15		
	Calcium	ppm	ASTM D5185m		0		
	Phosphorus	ppm	ASTM D5185m		6		
	Zinc	ppm	ASTM D5185m		24		
	CONTAMINANT	3	method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>15	2		
	Sodium	ppm	ASTM D5185m		_ <1		
	Potassium	ppm	ASTM D5185m	>20	0		
	Water	%	ASTM D6304		0.005		
	ppm Water	ppm	ASTM D6304	72	55.8		
	FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
	Acid Number (AN)	mg KOH/g	ASTM D8045		0.38		
	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
	Precipitate	scalar	*Visual	NONE	NONE		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
	rippeararioe						
	Odor	scalar	*Visual	NORML	NORML		



OIL ANALYSIS REPORT

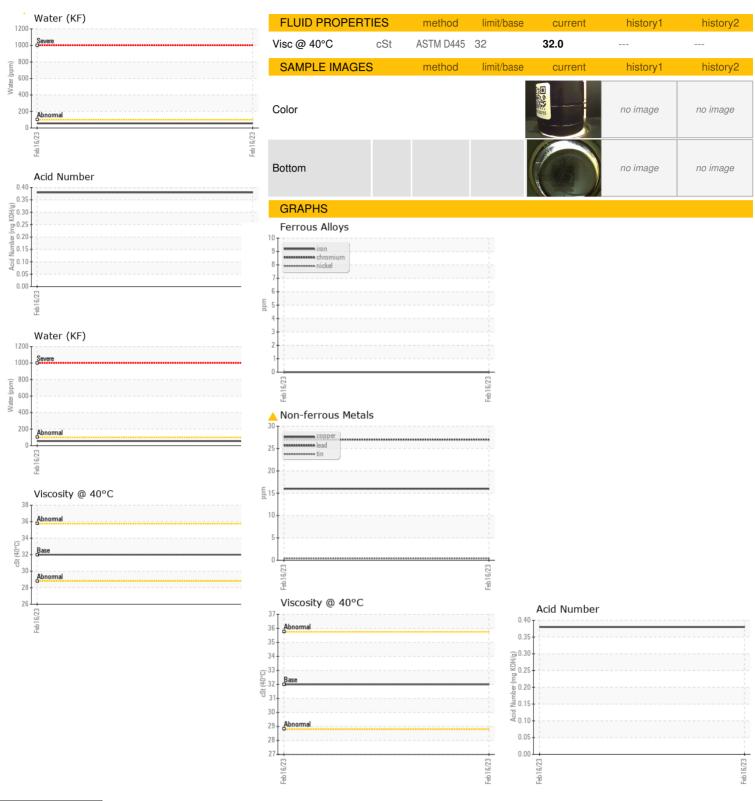



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: RP0028255 : 05797612 : 10387296 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 21 Mar 2023 : 23 Mar 2023 Diagnosed

Diagnostician : Don Baldridge

MAGELLAN MIDSTREAM - EH TERMINAL 7901 WALLISVILLE RD

HOUSTON, TX US 77029 Contact: LOGAN SEYL

logan.seyl@magellanlp.com T:

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: