

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id E305 Component Hydraulic System Fluid MOBIL DTE 10 EXCEL 32 (43 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Jul2011 I	Feb2015 Feb2017	Apr2018 Feb2020 Mar2021	1 Mar2023	
SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		MHI026241	MHI018330	MHI017007
Sample Date		Client Info		02 Mar 2023	08 Mar 2022	17 Mar 2021
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		84973	79567	73972
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		14		
Iron	ppm	ASTM D5185m	>50	4	1	<1
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	1	2	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	0	<1	<1
Copper	ppm	ASTM D5185m	>20	0	<1	<1
Tin	ppm	ASTM D5185m	>20	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	1	0
Calcium	ppm	ASTM D5185m	120	115	115	108
Phosphorus	ppm	ASTM D5185m	475	454	479	433
Zinc	ppm	ASTM D5185m		9	6	0
Sulfur	ppm	ASTM D5185m	1275	1750	1422	1271
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+30	<1	<1	0
Sodium	ppm	ASTM D5185m		<1	<1	1
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.1	0.005	0.002	0.009
ppm Water	ppm	ASTM D6304	>1000	53.7	20.9	97.3
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	831	881	2128
Particles >6µm		ASTM D7647	>1300	285	241	440
Particles >14µm		ASTM D7647	>160	29	36	39
Particles >21µm		ASTM D7647	>40	8	14	12
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12	17/15/12	18/16/12



OIL ANALYSIS REPORT

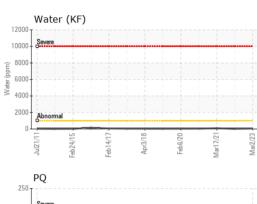




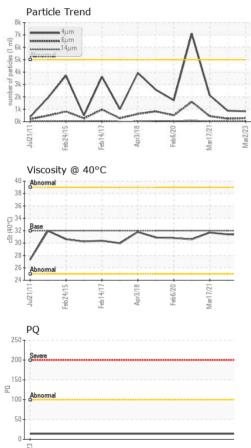


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.205	0.2	0.181
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	31.4	31.4	31.7
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color

Bottom

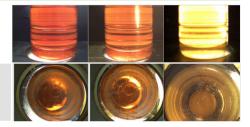

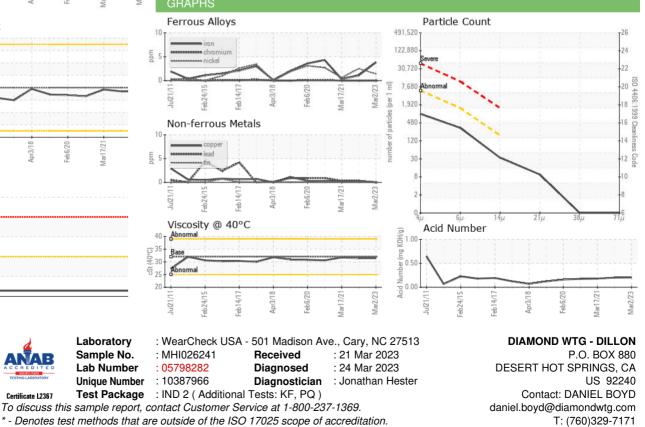

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: DANIEL BOYD - DIADIL

F: (760)329-7122