




OIL ANALYSIS REPORT

Sample Rating Trend

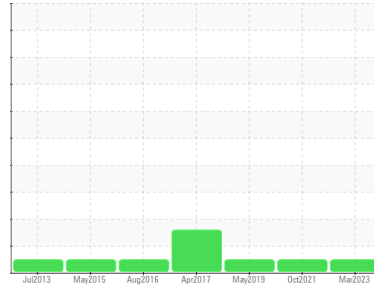

NORMAL



Area
BEEBE [200005316]
 Machine Id
06WEA82340 (S/N 72802112917)
 Component
Hydraulic System
 Fluid
SHELL TELLUS S4 VX 32 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		NX05798666	NX004279	NX005308
Sample Date	Client Info		21 Mar 2023	10 Oct 2021	28 May 2019
Machine Age	hrs	Client Info	73259	0	1214
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		17	18	14
Iron	ppm	ASTM D5185m >40	7	5	6
Chromium	ppm	ASTM D5185m >4	0	<1	<1
Nickel	ppm	ASTM D5185m >20	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	<1	0
Aluminum	ppm	ASTM D5185m >4	<1	0	<1
Lead	ppm	ASTM D5185m >10	1	1	<1
Copper	ppm	ASTM D5185m >60	<1	<1	<1
Tin	ppm	ASTM D5185m >4	2	2	0
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	1	0	<1
Calcium	ppm	ASTM D5185m	<1	0	<1
Phosphorus	ppm	ASTM D5185m	517	508	554
Zinc	ppm	ASTM D5185m	104	96	83
Sulfur	ppm	ASTM D5185m	771	734	723

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	6	4	5
Sodium	ppm	ASTM D5185m	0	<1	2
Potassium	ppm	ASTM D5185m >20	<1	<1	0
Water	%	ASTM D6304 >0.05	0.005	0.015	0.012
ppm Water	ppm	ASTM D6304 >500	52.5	159.4	120

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	6248	912	2356
Particles >6µm	ASTM D7647	>2500	1288	141	521
Particles >14µm	ASTM D7647	>320	36	8	33
Particles >21µm	ASTM D7647	>80	4	2	10
Particles >38µm	ASTM D7647	>20	0	0	0
Particles >71µm	ASTM D7647	>4	0	0	0
Oil Cleanliness	ISO 4406 (c)	>21/18/15	20/17/12	17/14/10	18/16/12



OIL ANALYSIS REPORT

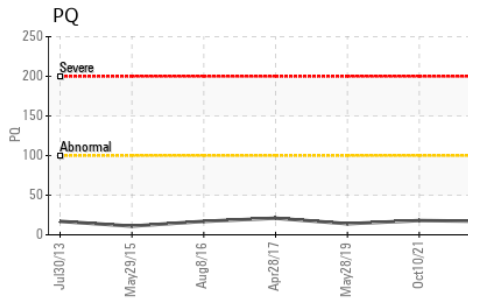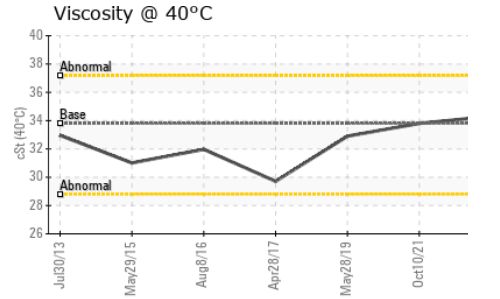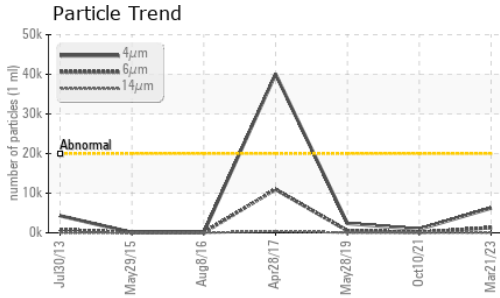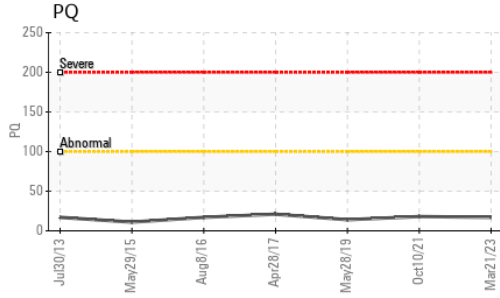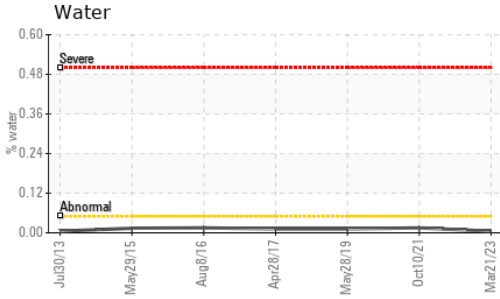

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.17	0.166	0.178


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	33.8	34.3	33.8	32.9






SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color

Bottom

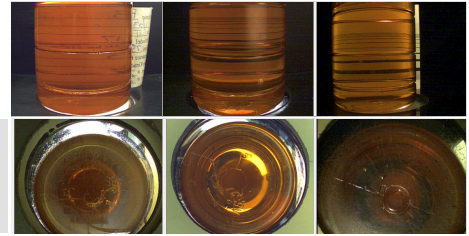

GRAPHS

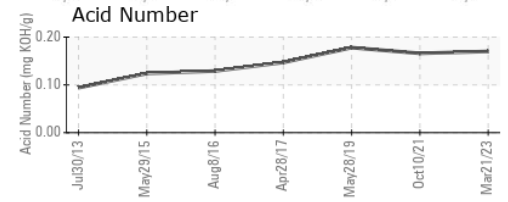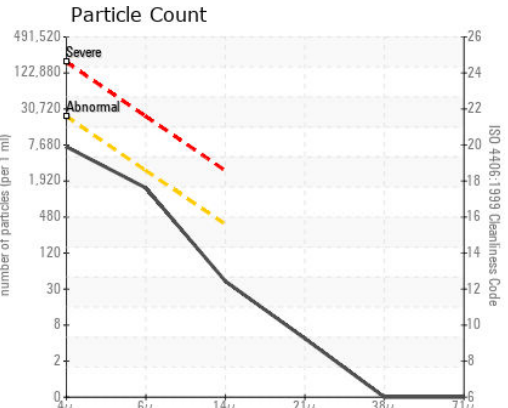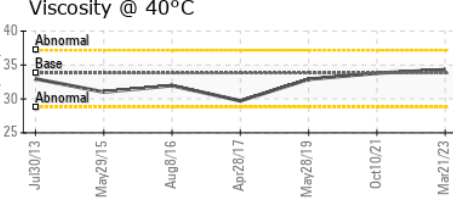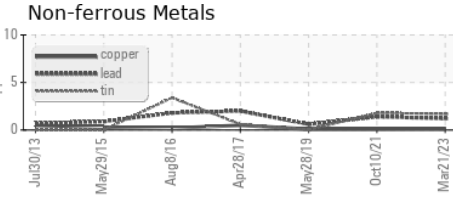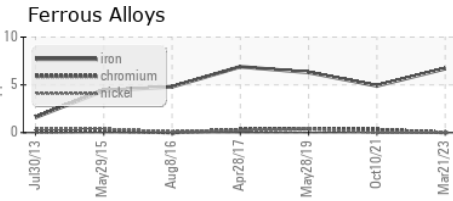

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : NX05798666 **Received** : 22 Mar 2023
Lab Number : **05798666** **Diagnosed** : 24 Mar 2023
Unique Number : 10388350 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PQ)

NORBEE USA - BEEBE
 1200 S COUNTY FARM RD
 ITHACA, MI
 US 48847
 Contact: TUCKER WITT
 tucker.witt@constellation.com
 T:
 F: (312)386-7102

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)