


# **PROBLEM SUMMARY**



## CATERPILLAR LR65-B Component

**Hydraulic System** NOT GIVEN (--- GAL)

## COMPONENT CONDITION SUMMARY

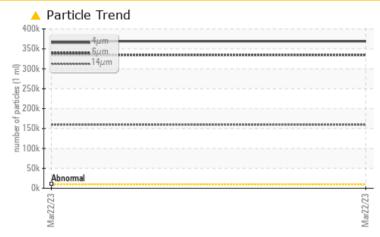

### RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## **PROBLEMATIC TEST RESULTS**

Sample Status			ABNORMAL		
Particles >4µm	ASTM D7647	>10000	<u> </u>		
Particles >6µm	ASTM D7647 2	>2500	<b>A</b> 334776		
Particles >14µm	ASTM D7647	>320	<u> </u>		
Particles >21µm	ASTM D7647	>80	<b>6</b> 53832		
Particles >38µm	ASTM D7647 2	>20	<u> </u>		
Particles >71µm	ASTM D7647 2	>4	<u> </u>		
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<u> </u>		
PrtFilter			no image	no image	no image


Customer Id: HYDPOO Sample No.: PH0000083 Lab Number: 05799664 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

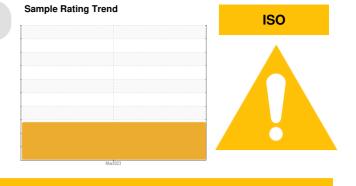

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Filter			?	We recommend you service the filters on this component.		

HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO



# CATERPILLAR LR65-B

Hydraulic System Fluid NOT GIVEN (--- GAL)

## DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.


#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0000083		
Sample Date		Client Info		22 Mar 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	1		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	3		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		8		
Molybdenum	ppm	ASTM D5185m		1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		3		
Calcium	ppm	ASTM D5185m		913		
Phosphorus	ppm	ASTM D5185m		730		
Zinc	ppm	ASTM D5185m		945		
Sulfur	ppm	ASTM D5185m		2048		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	4		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u> 369036</u>		
Particles >6µm		ASTM D7647	>2500	<u> </u>		
Particles >14µm		ASTM D7647	>320	<u> </u>		
			>80	<b>6</b> 53832		
		ASTM D7647	200	_ 00001		
Particles >21µm		ASTM D7647 ASTM D7647	>20	▲ 4771		
Particles >21µm Particles >38µm						
Particles >14μm Particles >21μm Particles >38μm Particles >71μm Oil Cleanliness		ASTM D7647	>20	<b>4771</b>		
Particles >21µm Particles >38µm Particles >71µm	TION	ASTM D7647 ASTM D7647	>20 >4	▲ 4771 ▲ 514		

number of particles (per 1

# **OIL ANALYSIS REPORT**

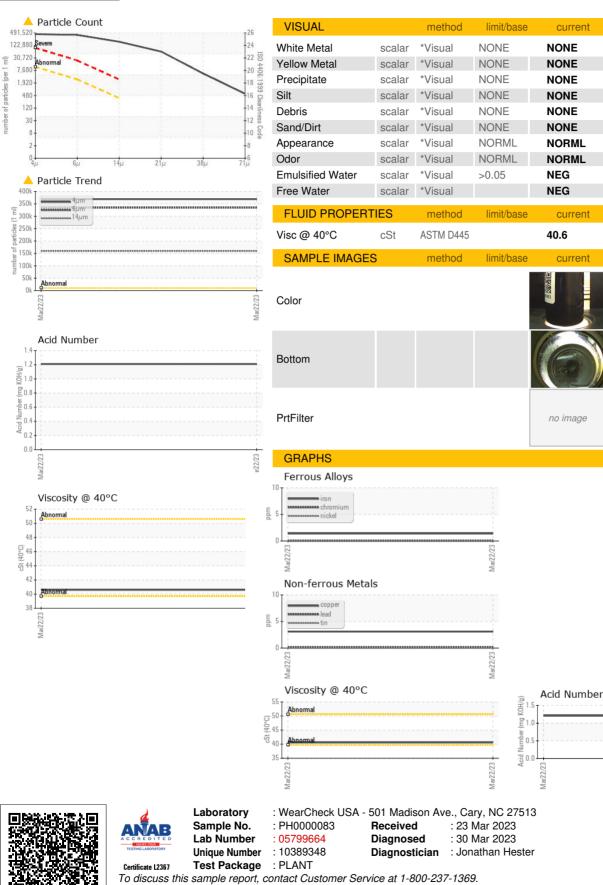

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

HYDRADYNE LLC 163 PINE BARREN RD POOLER, GA US 31322 Contact: DAN PAGE dpage@hydradynellc.com T: (912)748-0202 F:

history1

history

history1

no image

no image

no image

history2

historv2

history2

no imade

no imade

no image