

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

NISSEI PRESS 27 (S/N S28T107)

Hydraulic System

AW HYDRAULIC OIL ISO 46 (214 GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		May2001 M	ay2004 May2007 May	/2009 May2012 Jan2019	Mar2022	
SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0768431	WC0534557	WCI2335251
Sample Date		Client Info		05 Jan 2023	21 Mar 2022	26 Dec 2019
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ATTENTION
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	7	7	5
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>20	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	<1	2	2
Copper	ppm	ASTM D5185m	>20	14	14	11
Tin	ppm	ASTM D5185m	>20	0	<1	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	<1	<1
Barium	ppm	ASTM D5185m	5	0	0	<1
Molybdenum	ppm	ASTM D5185m	5	<1	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	25	2	3	3
Calcium	ppm	ASTM D5185m	200	67	72	76
Phosphorus	ppm	ASTM D5185m	300	376	403	401
Zinc	ppm	ASTM D5185m	370	405	459	464
Sulfur	ppm	ASTM D5185m	2500	1626	1231	1316
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	4
Sodium	ppm	ASTM D5185m		1	0	0
Potassium	ppm	ASTM D5185m	>20	0	2	<1
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4375	9868	13947
Particles >6µm		ASTM D7647	>1300	239	926	2209
Particles >14μm		ASTM D7647	>160	15	43	118
Particles >21µm		ASTM D7647	>40	3	6	26
Particles >38µm		ASTM D7647	>10	0	0	4
D		A OTA A DEO 45	0	•	0	0

ASTM D7647 >3

ISO 4406 (c) >--/17/14

Particles >71µm

Oil Cleanliness

20/17/13


19/15/11


0


21/18/14




OIL ANALYSIS REPORT










FILLID DECDARA	TION		11 1. 11			
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.31	0.29	0.305
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.9	44.7	44.6
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color						

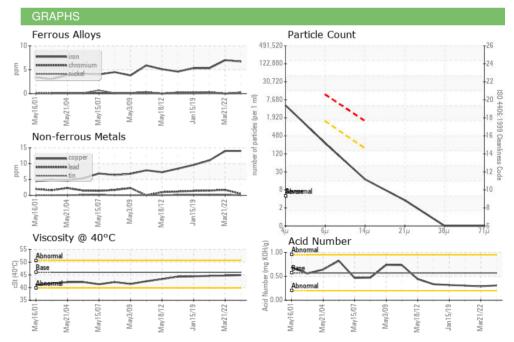





Certificate L2367

Laboratory Sample No.

: WC0768431 Lab Number : 05802339 Unique Number: 10399868 Test Package : IND 2

Bottom

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested**

Diagnosed

: 27 Mar 2023 : 28 Mar 2023

: 30 Mar 2023 - Don Baldridge

CORRY, PA US 16407 Contact: JOHN TRIKUR jtrikur@vikingplastics.com

VIKING PLASTICS

1 VIKING ST

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (814)664-8671 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (814)664-7797