


OIL ANALYSIS REPORT

ROTO XTEND ATLAS COPCO APF165875 - ARCH COAL (S/N APF165825)







Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | Mar2023 | | |
|------------------|----------|-------------|------------|-------------|--------------|----------|
| CAMPLE INCOR | 4ATION | | | | المراجعة أحا | histow.0 |
| SAMPLE INFORM | /IATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | UCH05802499 | | |
| Sample Date | | Client Info | | 22 Mar 2023 | | |
| Machine Age | hrs | Client Info | | 317 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | Not Changd | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | | |
| Chromium | ppm | ASTM D5185m | >5 | 0 | | |
| Nickel | ppm | ASTM D5185m | | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >15 | <1 | | |
| Lead | ppm | ASTM D5185m | >65 | 0 | | |
| Copper | ppm | ASTM D5185m | >65 | 0 | | |
| Tin | ppm | ASTM D5185m | >10 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | <1 | | |
| Calcium | ppm | ASTM D5185m | | <1 | | |
| Phosphorus | ppm | ASTM D5185m | | 20 | | |
| Zinc | ppm | ASTM D5185m | | 23 | | |
| Sulfur | ppm | ASTM D5185m | | 66 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| | | | | | , | |
| Silicon | ppm | ASTM D5185m | >35 | 1 | | |
| Sodium | ppm | ASTM D5185m | 00 | 6 | | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | | |
| FLUID DEGRADA | | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.14 | 0.05 | | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Precipitate | scalar | *Visual | NONE | NONE | | |
| Silt | scalar | *Visual | NONE | NONE | | |
| Debris | scalar | *Visual | NONE | NONE | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Appearance | scalar | *Visual | NORML | NORML | | |
| Odor | scalar | *Visual | NORML | NORML | | |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | | |
| Free Water | scalar | *Visual | | NEG | | |



OIL ANALYSIS REPORT

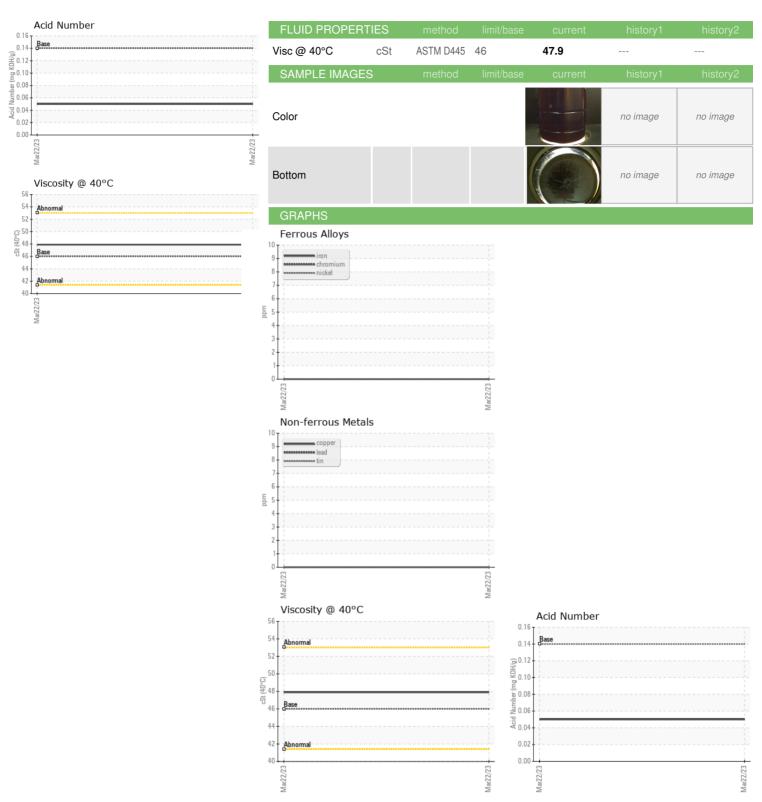





Laboratory Sample No.

Lab Number

: 05802499 Unique Number : 10400028 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : UCH05802499 Received : 27 Mar 2023 Diagnosed : 30 Mar 2023

Diagnostician : Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TOTAL EQUIPMENT COMPANY

200 SMILEY DR SAINT ALBANS, WV US 25177

Contact:

T:

F: