


## **OIL ANALYSIS REPORT**

### Sample Rating Trend



NORMAL



# E303 (S/N 6410-12)

Component

**Wind Turbine Gearbox** 

**MOBIL MOBILGEAR SHC XMP 320 (74 GAL)** 

#### Dirtaitoolo

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

L)		Apr2011	Feb2015 Feb2017	Mar2019 Jan2021	Mar2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		MHI026986	MHI018324	MHI017459
Sample Date		Client Info		07 Mar 2023	03 Mar 2022	12 Jan 2021
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		86432	80936	74344
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>200	9	19	14
Iron	ppm	ASTM D5185m	>200	4	9	8
Chromium	ppm	ASTM D5185m	>3	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	<1	0
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	<1	<1
Aluminum	ppm	ASTM D5185m	>30	<1	0	0
Lead	ppm	ASTM D5185m	>15	0	0	0
Copper	ppm	ASTM D5185m	>75	4	2	2
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m	>5			0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	PPIII		11 1.0			
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		<1	<1	0
Calcium	ppm	ASTM D5185m	0	<1	0	0
Phosphorus	ppm	ASTM D5185m	485	411	496	433
Zinc	ppm	ASTM D5185m	0	9	9	5
Sulfur	ppm	ASTM D5185m		4075	4225	3706
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+30	15	0	0
Sodium	ppm	ASTM D5185m	>15	0	0	1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.1	0.009	0.00	0.005
ppm Water	ppm	ASTM D6304	>1000	99.9	0.00	53.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1202	531	410
Particles >6µm		ASTM D7647	>5000	304	158	195
Particles >14µm		ASTM D7647	>640	21	24	54
Particles >21µm		ASTM D7647	>160	4	7	21
Particles >38µm		ASTM D7647	>40	0	1	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/19/16	17/15/12	16/14/12	16/15/13
		(-)				



## **OIL ANALYSIS REPORT**

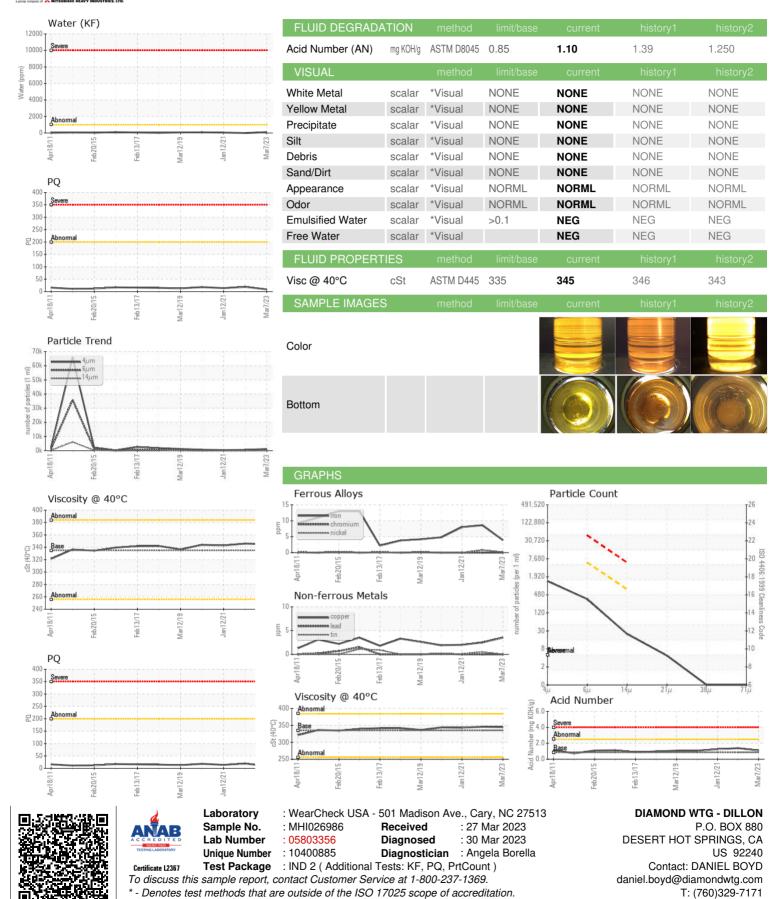

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (760)329-7122