


PROBLEM SUMMARY


Area
Wax Cups
 Machine Id
POS 37
 Component
Unknown Component
 Fluid
TULCO LUBSOIL INDUSTRIAL GEAR OIL 150 (--- GAL)

Sample Rating Trend

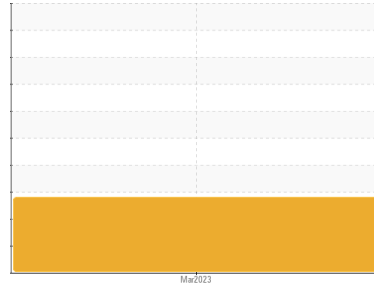


COMPONENT CONDITION SUMMARY

▲ Ferrous Alloys

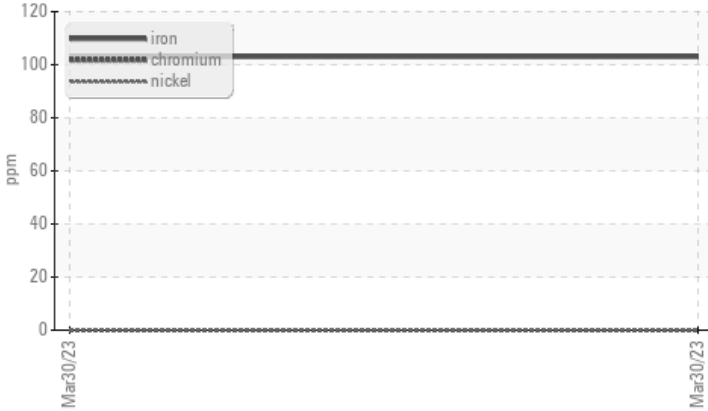

▲ Silicon (ppm)

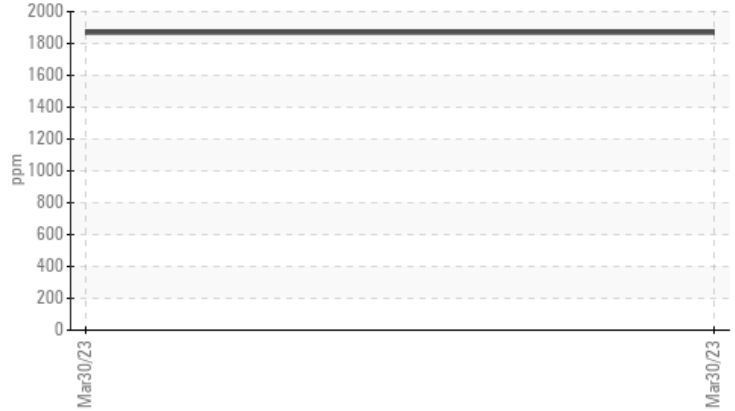

RECOMMENDATION

Check seals and/or filters for points of contaminant entry. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m		▲ 103	---	---
Silicon	ppm	ASTM D5185m		▲ 1869	---	---
Debris	scalar	*Visual	NONE	▲ MODER	---	---

Customer Id: DARDALTX
 Sample No.: TO50001598
 Lab Number: 05810942
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Angela Borella +1 800-237-1369
angela.borella@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com


RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component if applicable.
Check Seals	---	---	?	Check seals and/or filters for points of contaminant entry.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend

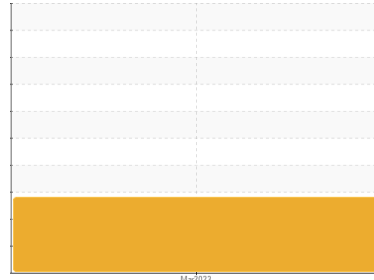

Area
Wax Cups
Machine Id
POS 37
Component
Unknown Component
Fluid
TULCO LUBSOIL INDUSTRIAL GEAR OIL 150 (--- GAL)

DIAGNOSIS

Recommendation
Check seals and/or filters for points of contaminant entry. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
Elemental level of silicon (Si) above normal indicating ingress of seal material. Moderate concentration of visible dirt/debris present in the sample.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the sample is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	TO50001598	---	---
Sample Date	Client Info	30 Mar 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	16	---	---
Iron	ppm ASTM D5185m	▲ 103	---	---
Chromium	ppm ASTM D5185m	0	---	---
Nickel	ppm ASTM D5185m	0	---	---
Titanium	ppm ASTM D5185m	0	---	---
Silver	ppm ASTM D5185m	0	---	---
Aluminum	ppm ASTM D5185m	<1	---	---
Lead	ppm ASTM D5185m	0	---	---
Copper	ppm ASTM D5185m	16	---	---
Tin	ppm ASTM D5185m	0	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	<1	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 13	0	---	---
Barium	ppm ASTM D5185m	0	---	---
Molybdenum	ppm ASTM D5185m	0	---	---
Manganese	ppm ASTM D5185m	2	---	---
Magnesium	ppm ASTM D5185m	10	---	---
Calcium	ppm ASTM D5185m	0	---	---
Phosphorus	ppm ASTM D5185m 170	226	---	---
Zinc	ppm ASTM D5185m	29	---	---
Sulfur	ppm ASTM D5185m 6300	5865	---	---





CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	▲ 1869	---	---
Sodium	ppm ASTM D5185m	4	---	---
Potassium	ppm ASTM D5185m >20	1	---	---
Water	% ASTM D6304	0.002	---	---
ppm Water	ppm ASTM D6304	23.0	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.59	---	---

OIL ANALYSIS REPORT


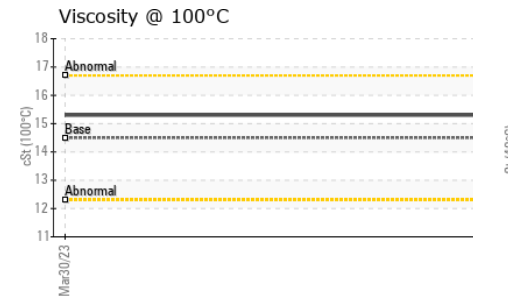
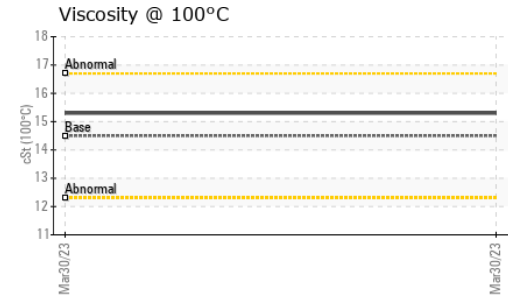
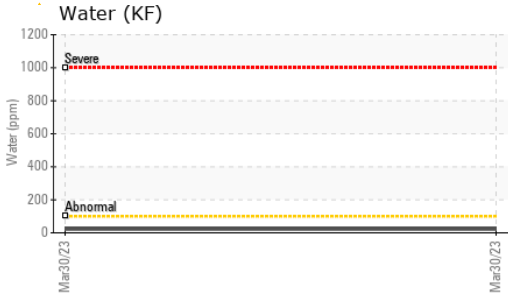
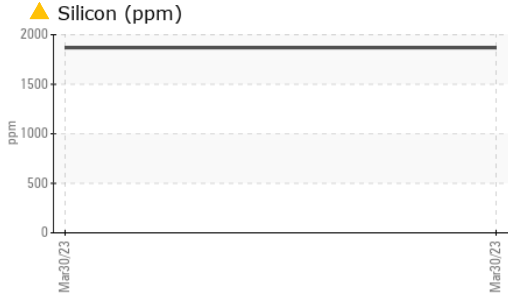


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	▲ MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	148	156	---	---
Visc @ 100°C	cSt	ASTM D445	14.5	15.3	---	---
Viscosity Index (VI)	Scale	ASTM D2270	96	98	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2	
Color					no image	no image
Bottom					no image	no image

GRAPHS

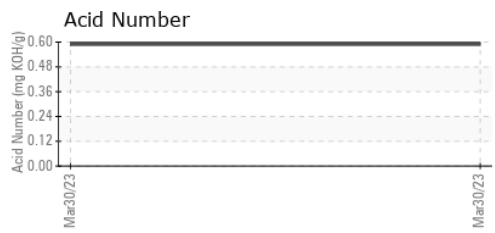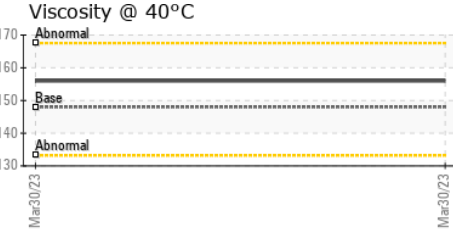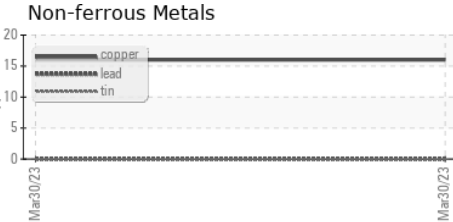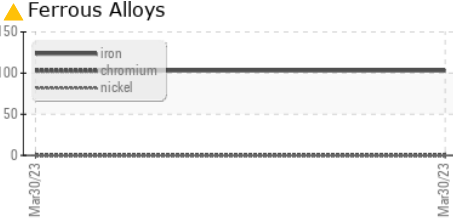

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50001598 **Received** : 04 Apr 2023
Lab Number : 05810942 **Diagnosed** : 11 Apr 2023
Unique Number : 10413734 **Diagnostician** : Angela Borella
Test Package : IND 2 (Additional Tests: KF, KV100, PQ, PrtCount, VI)

DART CONTAINER CORPORATION
 4444 W LEADBETTER DR
 DALLAS, TX
 US 75236
 Contact: YON PALOMINO
 yon.palomino@dart.biz
 T: (214)775-5673
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)