




PROBLEM SUMMARY


Sample Rating Trend

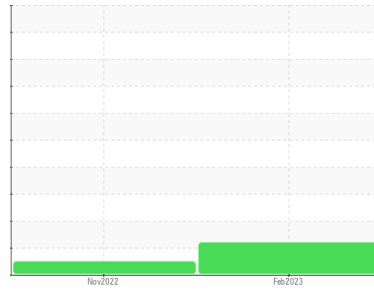

Machine Id
KAESER BSD 50 8293983 (S/N 1294)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (--- QTS)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

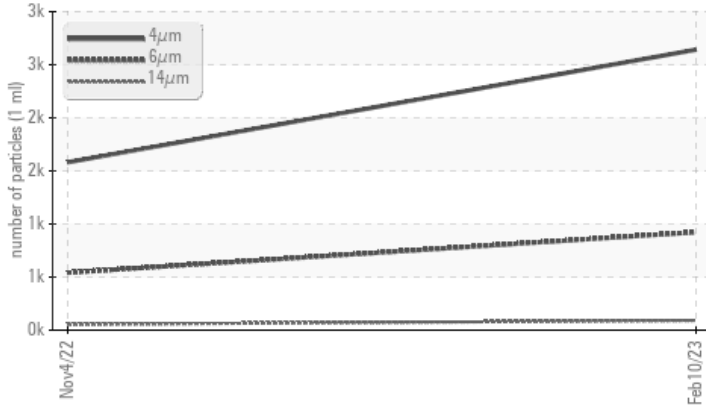

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	NORMAL	---
Particles >14µm	ASTM D7647	>80	▲ 91	54	---
Particles >21µm	ASTM D7647	>20	▲ 24	11	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 19/17/14	18/16/13	---

Customer Id: SFSREA
 Sample No.: KC95406D
 Lab Number: 05811620
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

04 Nov 2022 Diag: Doug Bogart

NORMAL



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry update of unit ID. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

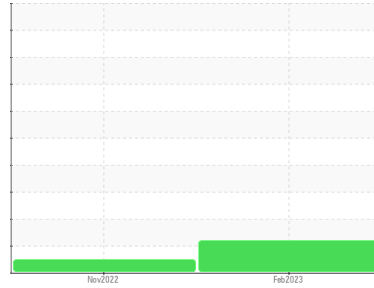

Machine Id
KAESER BSD 50 8293983 (S/N 1294)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KC95406D	KC107533	---
Sample Date	Client Info		10 Feb 2023	04 Nov 2022	---
Machine Age	hrs	Client Info	5091	2752	---
Oil Age	hrs	Client Info	5091	2752	---
Oil Changed	Client Info		Changed	Not Changd	---
Sample Status			ATTENTION	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	1	<1	---
Chromium	ppm	ASTM D5185m >10	0	0	---
Nickel	ppm	ASTM D5185m >3	0	0	---
Titanium	ppm	ASTM D5185m >3	0	0	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >10	<1	<1	---
Lead	ppm	ASTM D5185m >10	0	0	---
Copper	ppm	ASTM D5185m >50	7	3	---
Tin	ppm	ASTM D5185m >10	<1	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	0	---
Barium	ppm	ASTM D5185m 90	2	4	---
Molybdenum	ppm	ASTM D5185m 0	0	0	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m 100	46	66	---
Calcium	ppm	ASTM D5185m 0	0	1	---
Phosphorus	ppm	ASTM D5185m 0	13	15	---
Zinc	ppm	ASTM D5185m 0	7	0	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	1	0	---
Sodium	ppm	ASTM D5185m	10	13	---
Potassium	ppm	ASTM D5185m >20	8	6	---
Water	%	ASTM D6304 >0.05	0.016	0.022	---
ppm Water	ppm	ASTM D6304 >500	169.8	225.5	---

FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		2642	1581	---
Particles >6µm	ASTM D7647	>1300	923	541	---
Particles >14µm	ASTM D7647	>80	▲ 91	54	---
Particles >21µm	ASTM D7647	>20	▲ 24	11	---
Particles >38µm	ASTM D7647	>4	1	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 19/17/14	18/16/13	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.38	0.42	---

OIL ANALYSIS REPORT

▲ Particle Trend

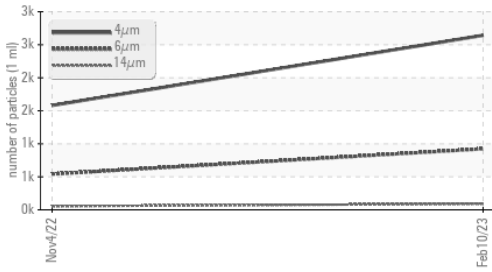


Water (KF)

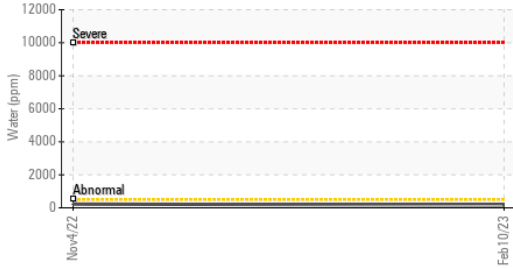

Acid Number



Water (KF)

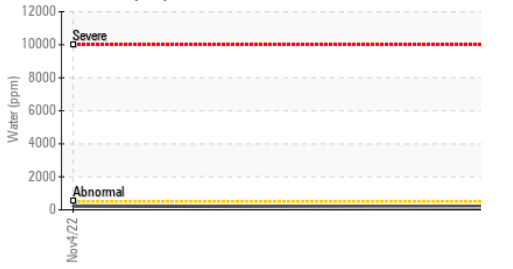


Viscosity @ 40°C



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	VLITE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	44.2	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

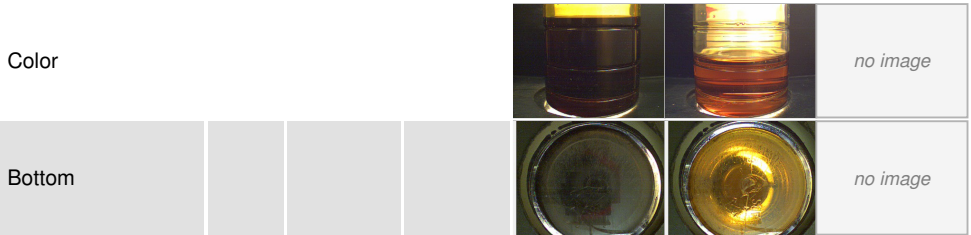


GRAPHS

Ferrous Alloys

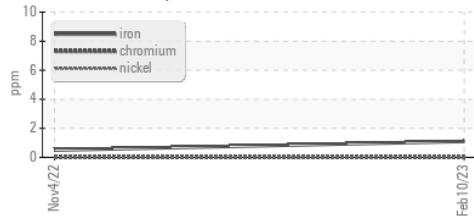


Non-ferrous Metals

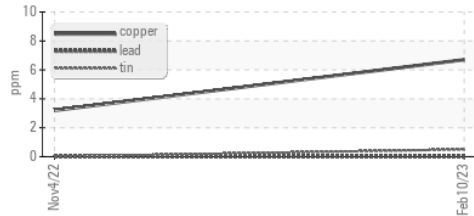

Viscosity @ 40°C



▲ Particle Count

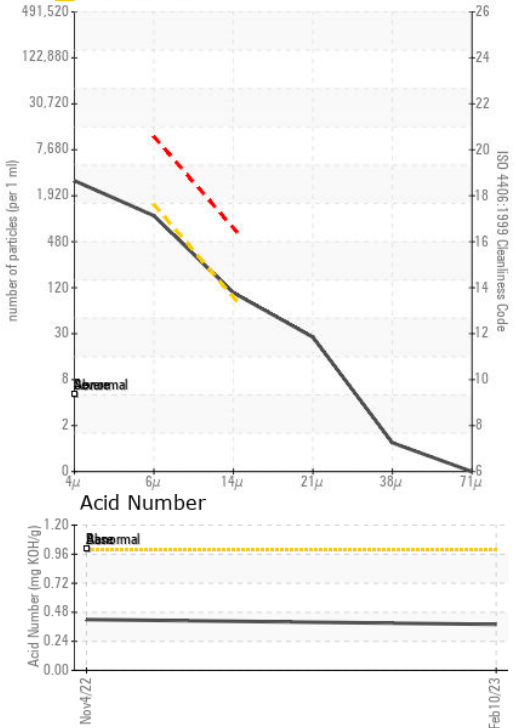

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC95406D **Received** : 05 Apr 2023
Lab Number : 05811620 **Diagnosed** : 06 Apr 2023
Unique Number : 10414412 **Diagnostician** : Doug Bogart
Test Package : IND 2

SFS INTEC INC
 71 DENNIS DR
 READING, PA
 US 19610
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: