

# **OIL ANALYSIS REPORT**

# {UNASSIGNED} Machine Id PALFINGER 100457062

Component

**Hydraulic System** 

{not provided} (40 GAL)

Sample Rating Trend



## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: 786 hours 40 gallon )

## Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Dec2022		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0747222		
Sample Date		Client Info		21 Dec 2022		
Machine Age	hrs	Client Info		786		
Oil Age	hrs	Client Info		786		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>75	1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		23		
Calcium	ppm	ASTM D5185m		78		
Phosphorus	ppm	ASTM D5185m		336		
Zinc	ppm	ASTM D5185m		428		
Sulfur	ppm	ASTM D5185m		4433		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	2		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>45609</b>		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>160	<b>464</b>		
Particles >21µm		ASTM D7647	>40	<u>^</u> 79		
Particles >38µm		ASTM D7647	>10	7		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>23/21/16</b>		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (ANI)	ma 1/011/a	ACTM DODAE		0.07		

Acid Number (AN)

mg KOH/g ASTM D8045



# **OIL ANALYSIS REPORT**

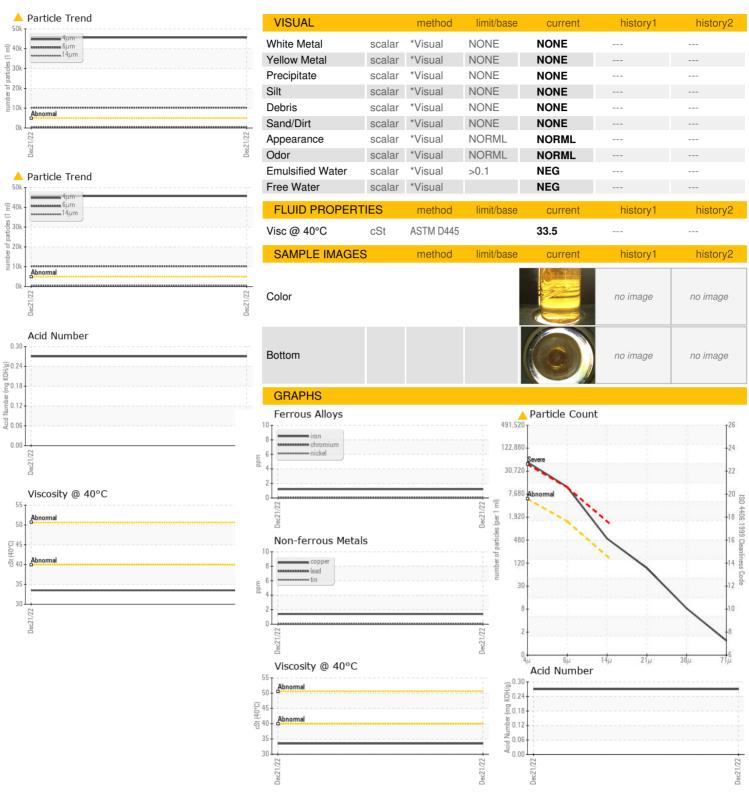





Laboratory Sample No.

Lab Number Unique Number

Test Package : CONST

: WC0747222 : 05812114 : 10414906

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 05 Apr 2023 Recieved Diagnosed Diagnostician

: 10 Apr 2023 : Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. **PALFINGER - BRANCH 410** 632 CEDAR SWAMP RD JACKSON, NJ US 08527

Contact: DON DRESS d.dress@palfinger.com

T: F:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)