

OIL ANALYSIS REPORT

Sample Rating Trend







Area (J) PH 1 Machine Id HT 06 Component Agitator Gearbox Filuid NOT GIVEN (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM		method	limit/base	current	history1	history2
Sample Number		Client Info		USP234433		
Sample Date		Client Info		04 Apr 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
-			11 1. 11			
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	15		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	4		
Lead	ppm	ASTM D5185m	>100	<1		
Copper	ppm	ASTM D5185m	>50	13		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
			11111/0030			
Boron	ppm	ASTM D5185m		61		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		8		
Phosphorus	ppm	ASTM D5185m		1284		
Zinc Sulfur	ppm	ASTM D5185m		37		
Sullur	ppm	ASTM D5185m		23078		
CONTAMINANTS	\$	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	6		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.1	0.045		
ppm Water	ppm	ASTM D6304	>1000	451.4		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
		ASTM D7647	>20000	6213		
Particles >4µm Particles >6µm			>5000	397		
Particles >0µm Particles >14µm		ASTM D7647 ASTM D7647	>5000	397 10		
Particles >21µm		ASTM D7647 ASTM D7647	>640 >160	2		
Particles >38µm		ASTM D7647 ASTM D7647	>40	0		
Particles >71µm		ASTM D7647 ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>10	0 20/16/10		
		130 4400 (C)	>21/19/10	20/10/10		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		3.69		
. /	- 0					




OIL ANALYSIS REPORT



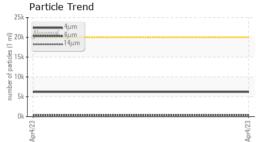

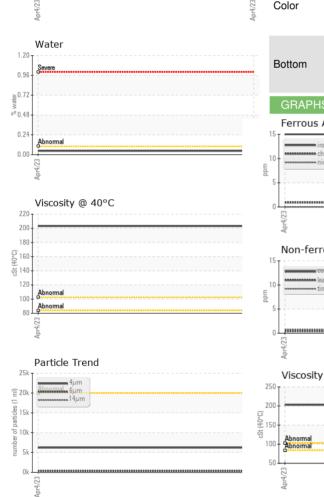

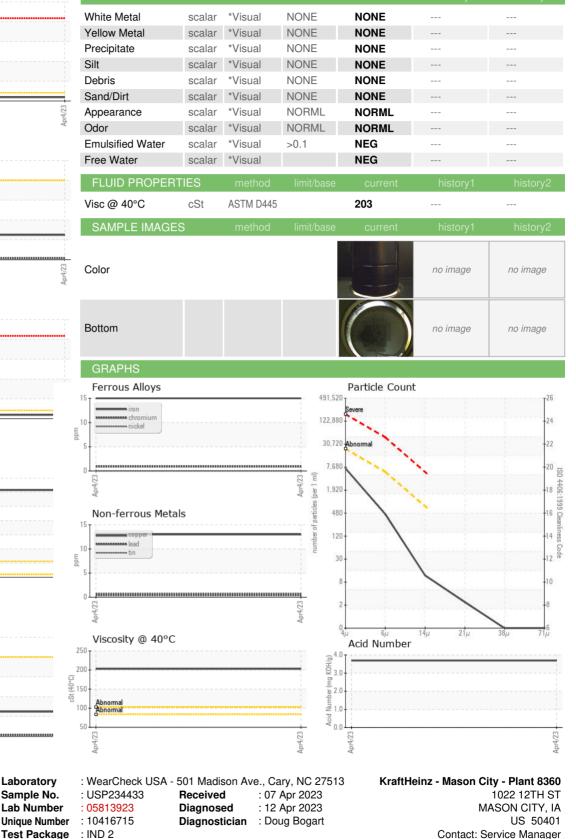

Test Package Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

萨

Laboratory

Sample No.

Lab Number

Contact/Location: Service Manager - KRAMASIOW